



SMA-02-99-J-TGG SMA inline crimp jack for CLF240

REV	DESCRIPTION	DRAWN	DATE

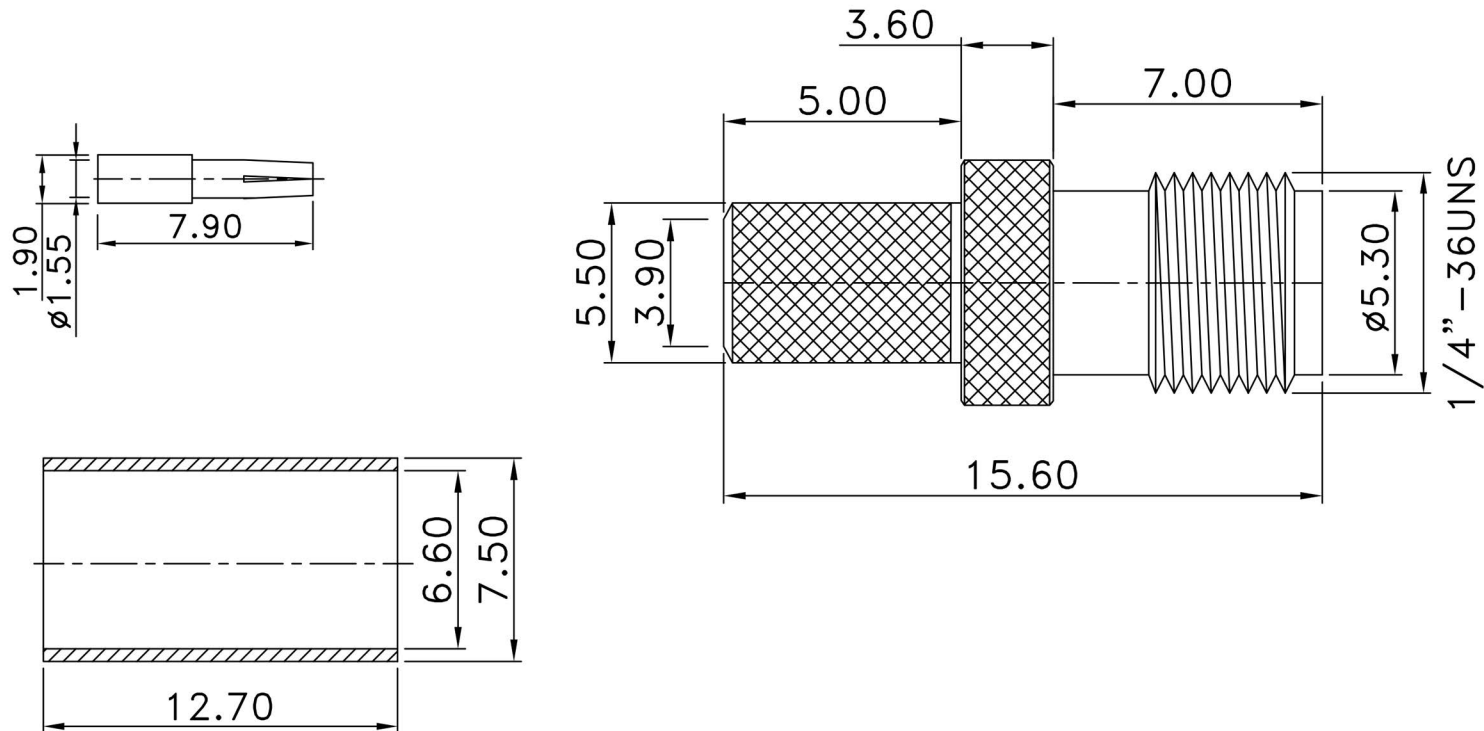

4	FERRULE	1	COPPER	GOLD	UNLESS OTHERWISE SPECIFIED 1.REMOVE ALL BURRS. 2.BREAK ALL CONNERS & EDGES 0.15 MAX. 3.CHAMFER 1ST & LAST THREADS 45° 4.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 TIR 5.ALL DIMENSIONS ARE AFTER PLATING.	* MAJOR DIMENSION		APPROVED	 CHANG HONG TECHNOLOGY CO., LTD. TITLE SMA FEMALE CRIMP FOR H155 DRAWING NO. SMA-02-99-J-TGG FILE NO.	
3	DIELECTRIC	1	TEFLON	NONE		UNLESS OTHERWISE NOTED TOLERANCES	0.5-6=±0.2			CHECKED
2	PIN	1	Be Cu	GOLD		6-30=±0.4	30-120=±0.6			DRAWN
1	BODY	1	BRASS	GOLD		120-315=±1.0	ANGLES=±1°			andrew
NO	Description	Q'ty	Material	Finish		SCALE	6/1	UNIT		MM
									REV A	