

## T000CCD-80

### Coaxial Cable Designed Antenna



## Product Specifications

Frequency: 2400-2500MHZ / 5150-5350MHZ / 5350-5725MHZ / 5725-5875MHZ

Efficiency: 70% / 60% / 60% / 60%

Peak Gain: 2dBi / 2.5dBi / 2.5dBi / 2.5dBi

VSWR: 2.5 : 1 Max

Power: 1W

Impedance: 50Ω

Connector: Mini Connector for I-PEX MHF

Cable Diameter: 1.13mm


Cable Length: 80mm, Black


## Environmental Specifications



Temperature: -10°C to +55°C

Composite: 80% @ -10°C to +55°C

Dimensions: 20 x 7 x 1.9mm



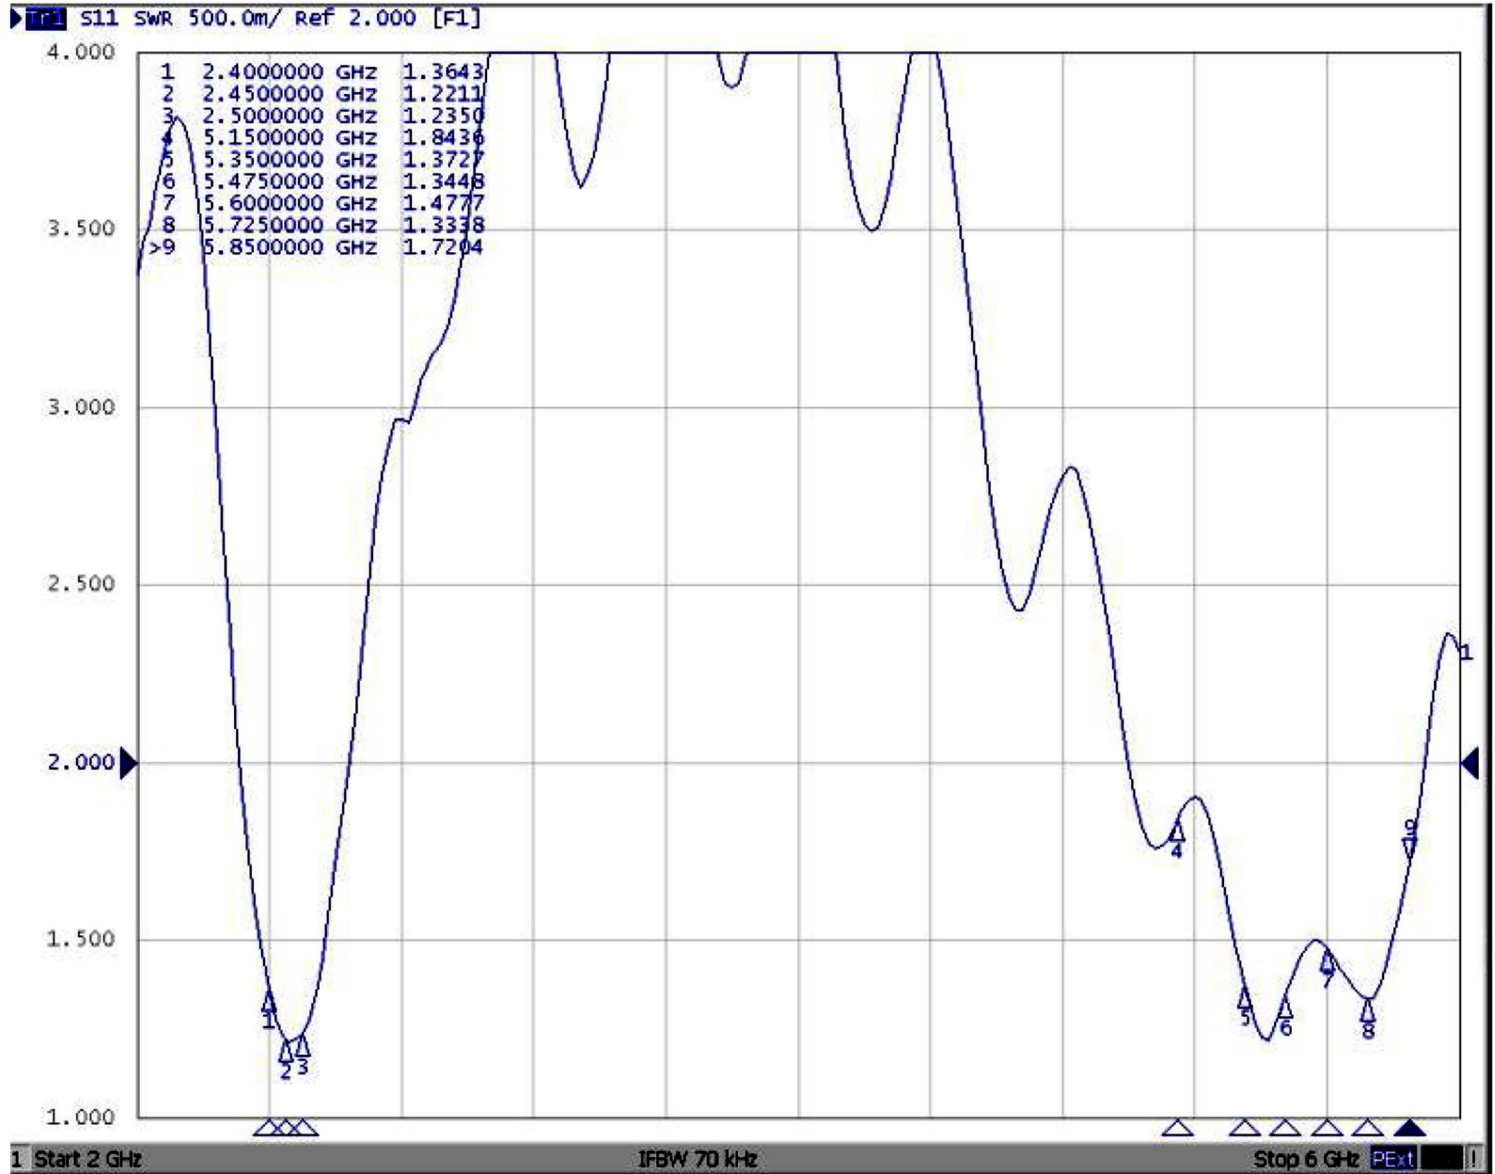


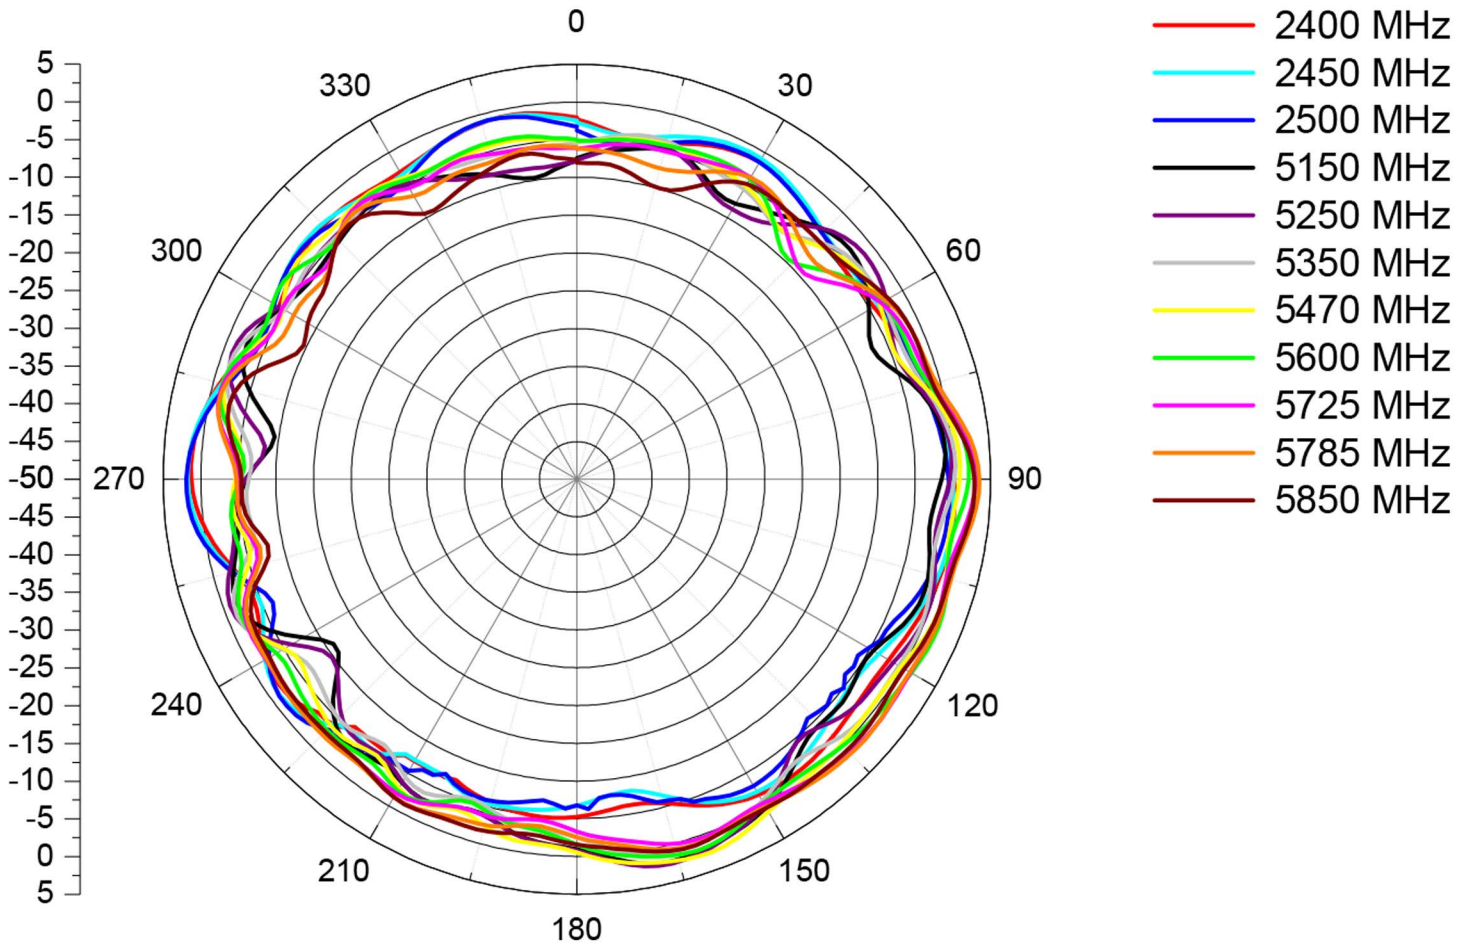

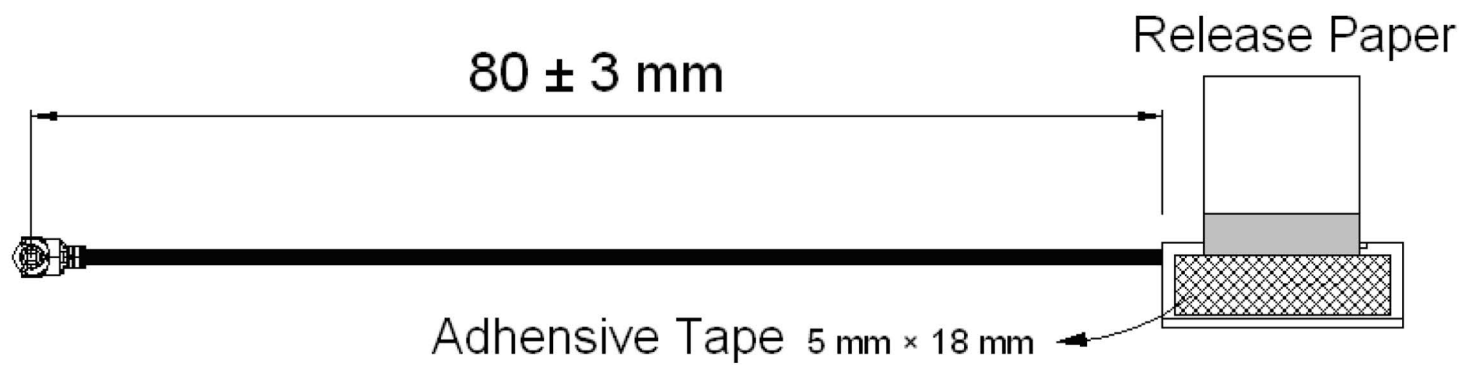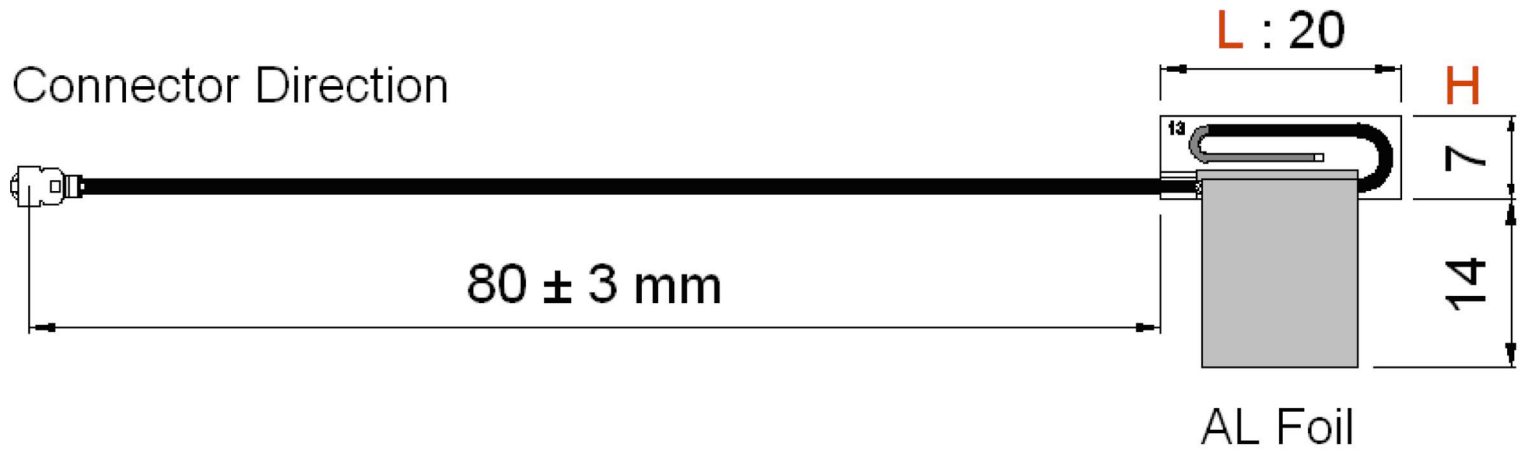


## CCD Antenna Installation Guide

Apply the adhesive tape mounted on the black holder of the antenna onto a non-metallic surface of the device enclosure. Then run the AL foil flat over a metallic or non-metallic surface – it can be but is not required to be in contact with the device's ground connection

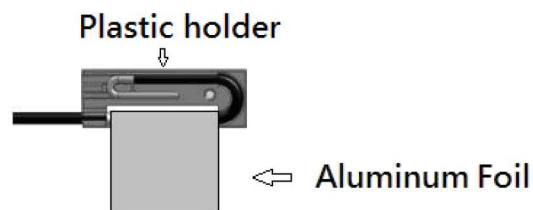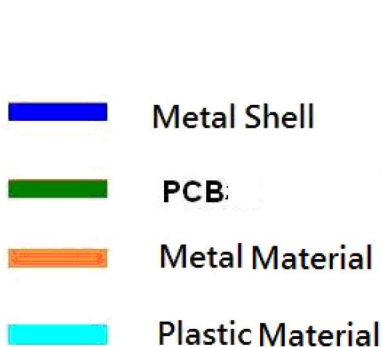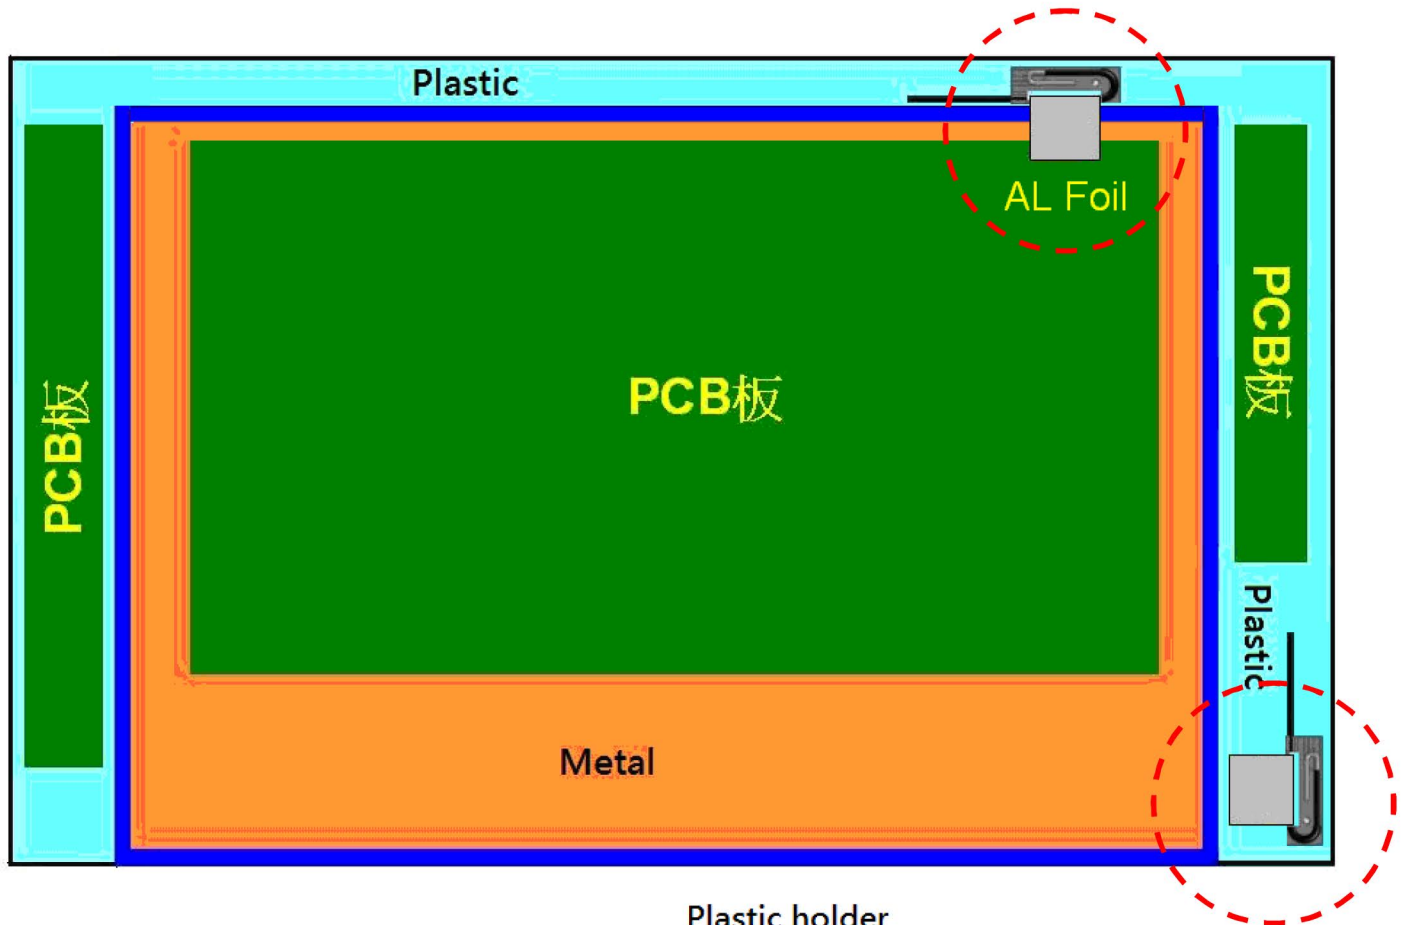


1. The aluminum foil could be either connected with grounding or not connected with grounding .
2. The plastic holder should be pasted on the insulating materials .

**CCD Antenna can be designed in AP, Router, Game Station and Console, NB, TV**

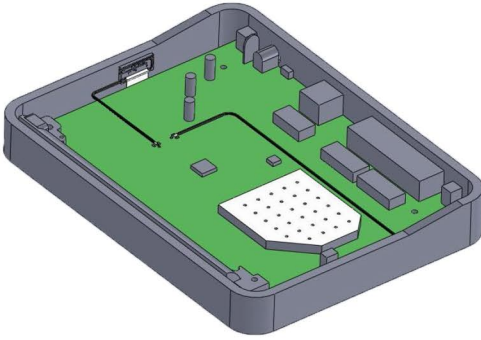


AP, Router

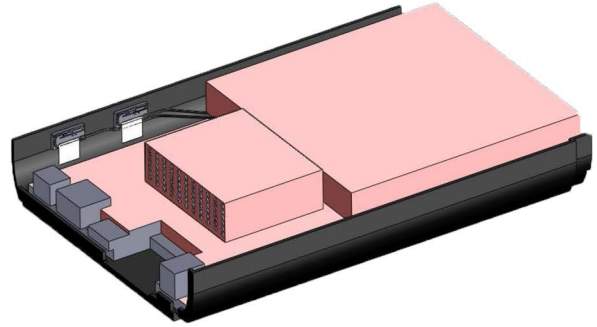


Game Station




Game Console

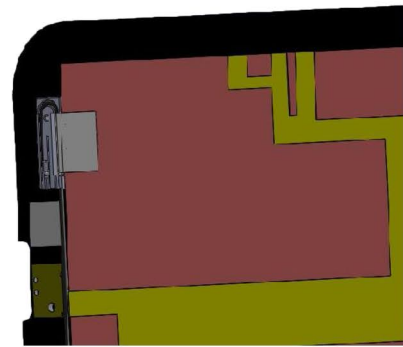

Game Console



Notebook

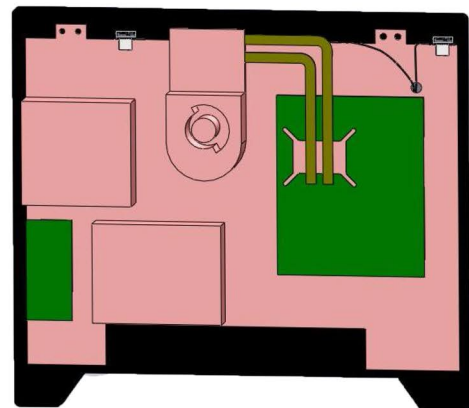

TV AIO