

LAV-TITANIUM

Professional Omnidirectional Lavalier Microphone



Features:

- Extremely rugged and reliable
- Exceptional audio quality
- Very low noise
- Lightweight & compact, high performing design
- Natural sound with professional accuracy
- Low sensitivity to popping & breath overloads at close up situations
- Compatible with most wireless transmitters
- High Tensile, low contact noise cable
- Easy clip-on style for comfortable use



Magnetic Clip



Lanyard



Single Clip



Twin Clip



Tie Clip



Viper Clip







Windscreen


Specifications:

- Elements : Back Electret Condenser
- Polar Pattern : Omnidirectional
- Frequency Range : 50 Hz ~ 18,000 Hz
 - Sensitivity : $-63\text{dB} \pm 3\text{dB}$ ($0\text{dB}=1\text{v}/\mu\text{bar}@1\text{KHz}$)
 - Impedance : $1.1\text{k} \Omega \pm 3\text{dB}$ @ 1KHz
- Max Input SPL : 126 dB @ 1KHz
 - S/N Ratio : above 70dB @ 1 KHz
- Operating Voltage : 1V ~ 5V DC
 - Test Condition : $RL=15\text{K}$, $VDC=2\text{V}$
 - Dimensions : .22" (Mic Head) x 1.02" (L), 43" (Cable)


Circuit Diagrams:

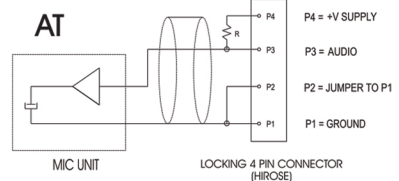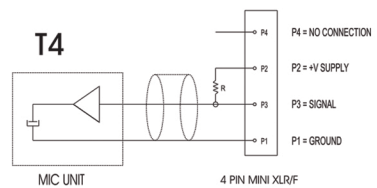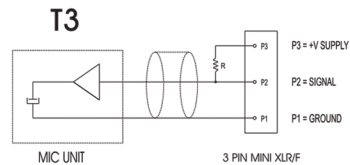

Frequency Response Graph:

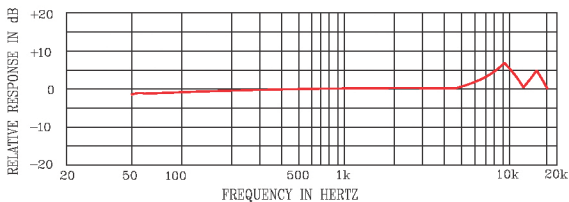

Polar Patterns:



Optional Connector:

