


# 70-180

## QUIET CUSHION®

### Premium Acoustical Underlayment

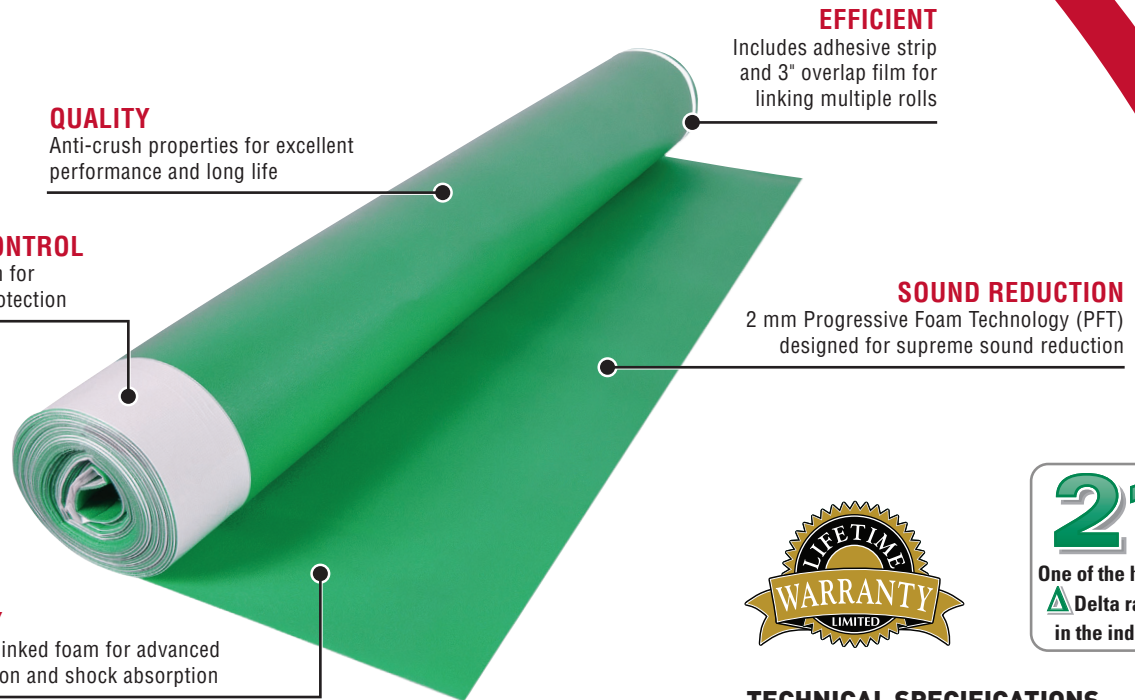

**QUALITY**  
Anti-crush properties for excellent performance and long life

**MOISTURE CONTROL**  
Vapor Barrier Film for extra moisture protection

**TECHNOLOGY**  
Extra fine, cross linked foam for advanced moisture protection and shock absorption

**EFFICIENT**  
Includes adhesive strip and 3" overlap film for linking multiple rolls


**SOUND REDUCTION**  
2 mm Progressive Foam Technology (PFT) designed for supreme sound reduction



#### TECHNICAL SPECIFICATIONS

IIC (Impact Sound Transmission Test)	71
STC (Sound Transmission Loss Test)	67
Δ (Sound Transmission Loss Test)	21

IIC and STC tests measure sound transference from an upper level room to a lower level room. The IIC measures sound such as moving furniture and walking, while the STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50. R-Value is the rating used to measure resistance to heat flow.

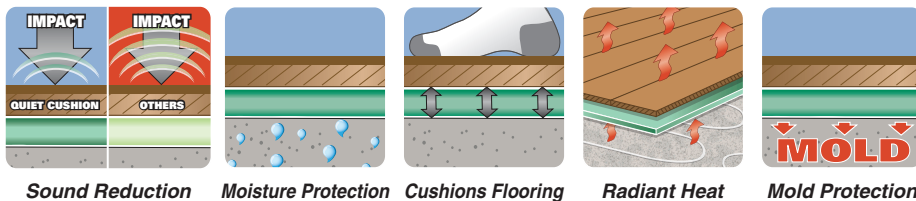

Quiet Cushion® is a premium acoustical underlayment made up of sound dampening high-performance cross-linked foam with an overlapping film for extra moisture protection at the joints. The extra fine foam offers advanced moisture protection and shock absorption. Utilizing this Progressive Foam Technology (PFT), Quiet Cushion is designed for supreme sound reduction, with a Delta rating of 21, one of the highest in the industry. For use under engineered and laminate flooring .

#### SPECIFICATIONS

UNIT OF MEASURE	12 rolls per case
COVERAGE	100 sq. ft. per roll 1200 sq. ft. per case
WIDTH OF ROLL	43.5"
LENGTH OF ROLL	27.5 ft.
THICKNESS	2 mm
WEIGHT PER ROLL	3.1 lbs.
DIAMETER OF ROLL	6.25"

Y2814-9114

Quality & Excellence Since 1938.

[www.ROBERTSCONSOLIDATED.com](http://www.ROBERTSCONSOLIDATED.com)

U.S. Headquarters  
866 435 8665

Canada  
800 840 9422

Europe/Middle East  
0031 24 6485348

Australia  
011 61 3 9797 1888

New Zealand  
64 9 415 9700