






## IL-E Indicator Light



Wiring schematic diagram



Mounting hole

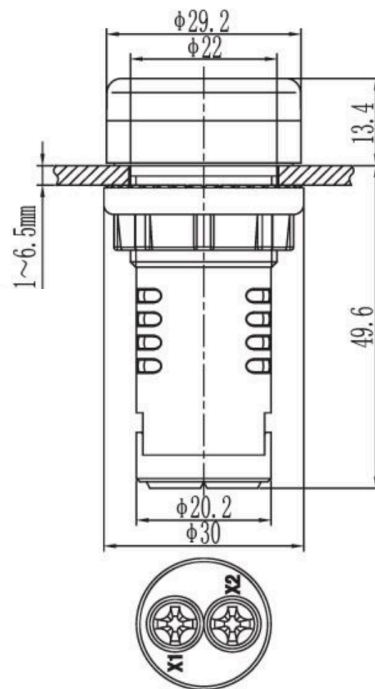

Dielectric strength:	2.5KV AC ,1min
Insulation resistance:	$\geq 2M\Omega$
Comparative tracking index:	CTI $\geq 100$
Allowable voltage fluctuation:	$U_e \leq 48V$ , fluctuation $\pm 5\%$
	$U_e > 48V$ , fluctuation $\pm 20\%$
Brightness:	$\geq 75\text{mcd}$
Brightness height:	$\geq 150\text{mcd}$
Life time:	$\geq 30,000$ hours
Operating temperature:	$-25^\circ\text{C} \sim +55^\circ\text{C}$
Relative humidity:	98%

[Stack-Light.com](http://Stack-Light.com)

(678) 288-9678

[Sales@stack-light.com](mailto:Sales@stack-light.com)