

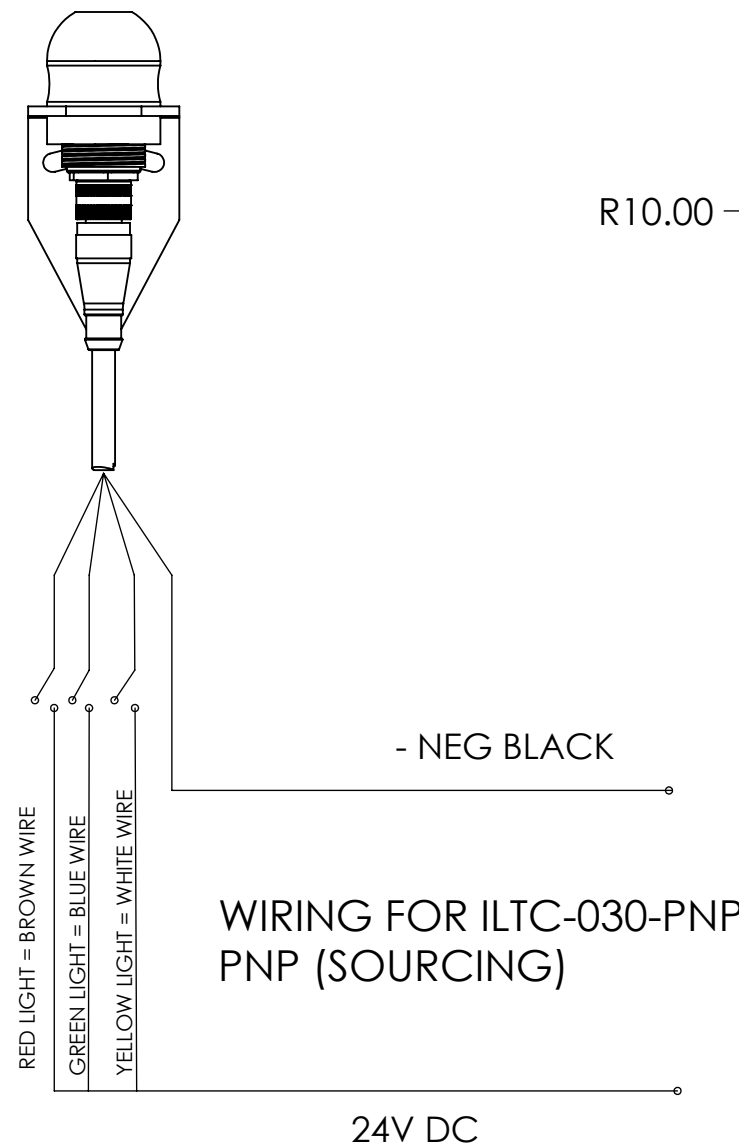



WIRING FOR ILTC-030-NPN
NPN (SINKING)

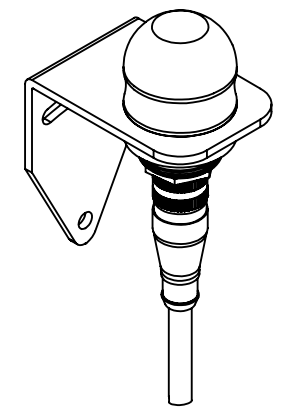

WIRING FOR ILTC-030-PNP
PNP (SOURCING)

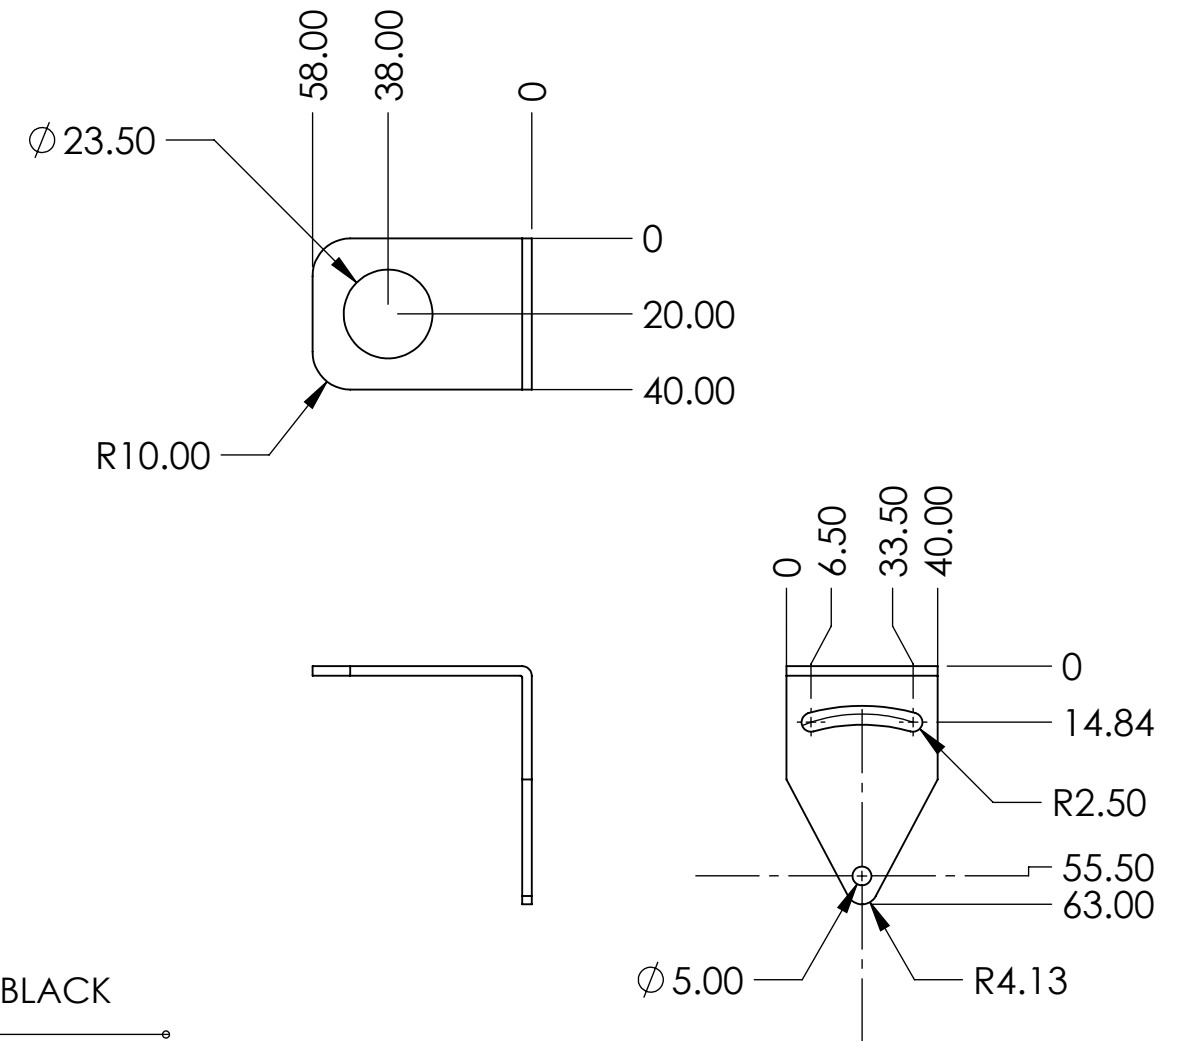

- PIN OUT
1. BROWN WIRE (RED LIGHT)
 2. WHITE WIRE (GREEN LIGHT)
 3. BLUE WIRE (GREEN LIGHT)
 4. BLACK WIRE (COMMON)

Specifications:
 Body Material Aluminum
 Voltage 24V DC
 Rated Current .02A when Red, .02A when Yellow, .01A when Green
 Life Span 50,000 hours

DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS:	TITLE	ILTC-O30
		MATERIAL	
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		FINISH	VENDOR
		DES. BY	VENDOR#
		DESIGNED DATE 11/7/2018	DRAWING NO.
		LAST SAVED DATE 11/6/2023	REV
BREAK ALL SHARP EDGES	DWG SIZE: B	ILTC-O30	
WEIGHT 0.730 LBS			
PROPRIETARY AND CONFIDENTIAL			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			