



RC-M TRANSMITTER

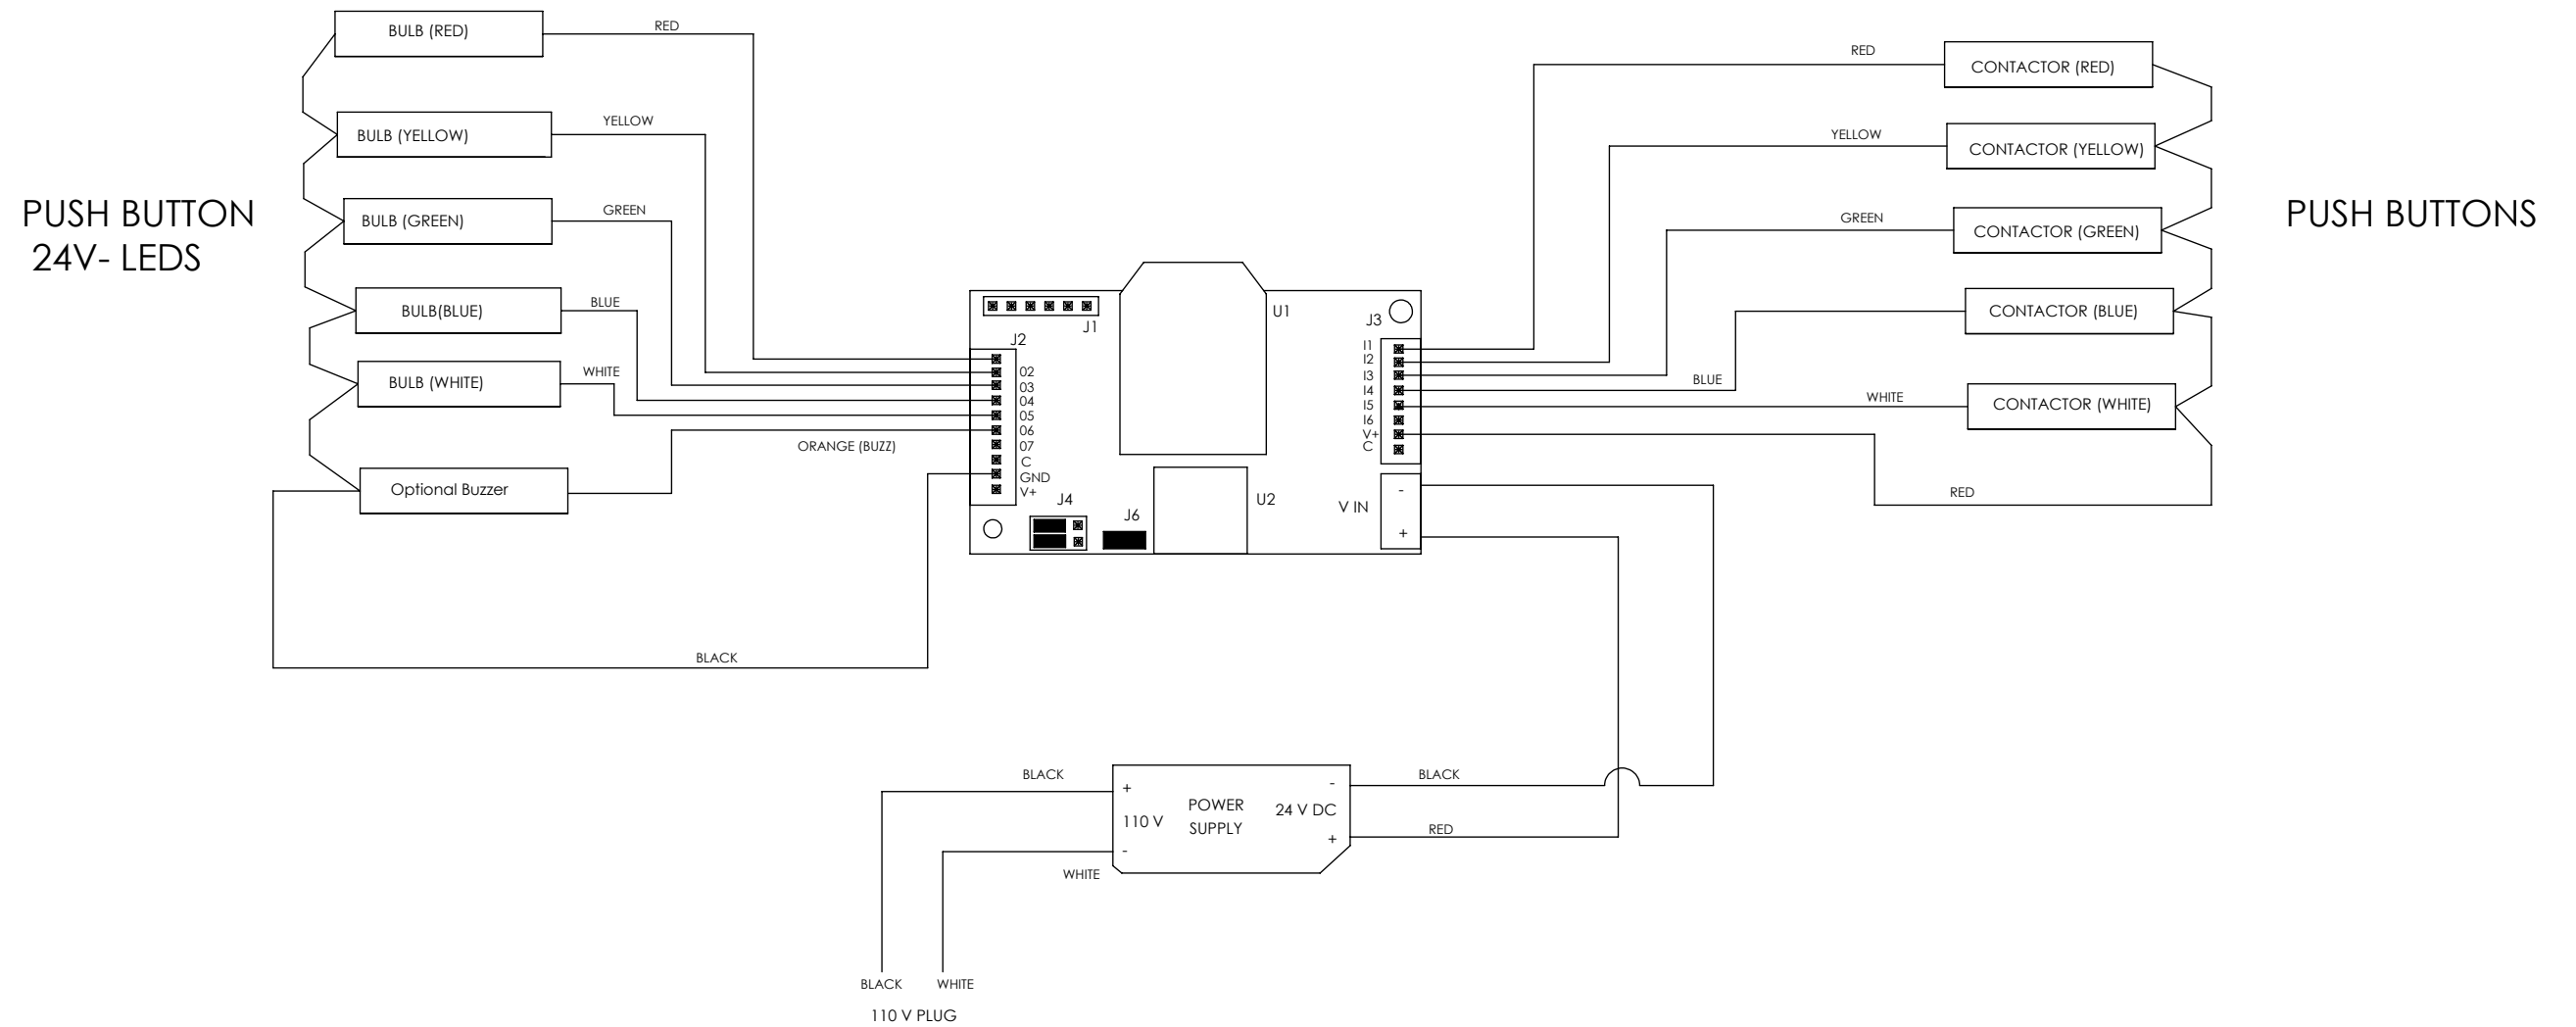


DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE REMOTE CONTROL	
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		DESIGNED DATE	VENDOR
BREAK ALL SHARP EDGES		LAST SAVED DATE	VENDOR#
DWG SIZE: B		DRAWING NO.	REV
WEIGHT LBS		PROPRIETARY AND CONFIDENTIAL	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

RC-B BATTERY POWERED TRANSMITTER

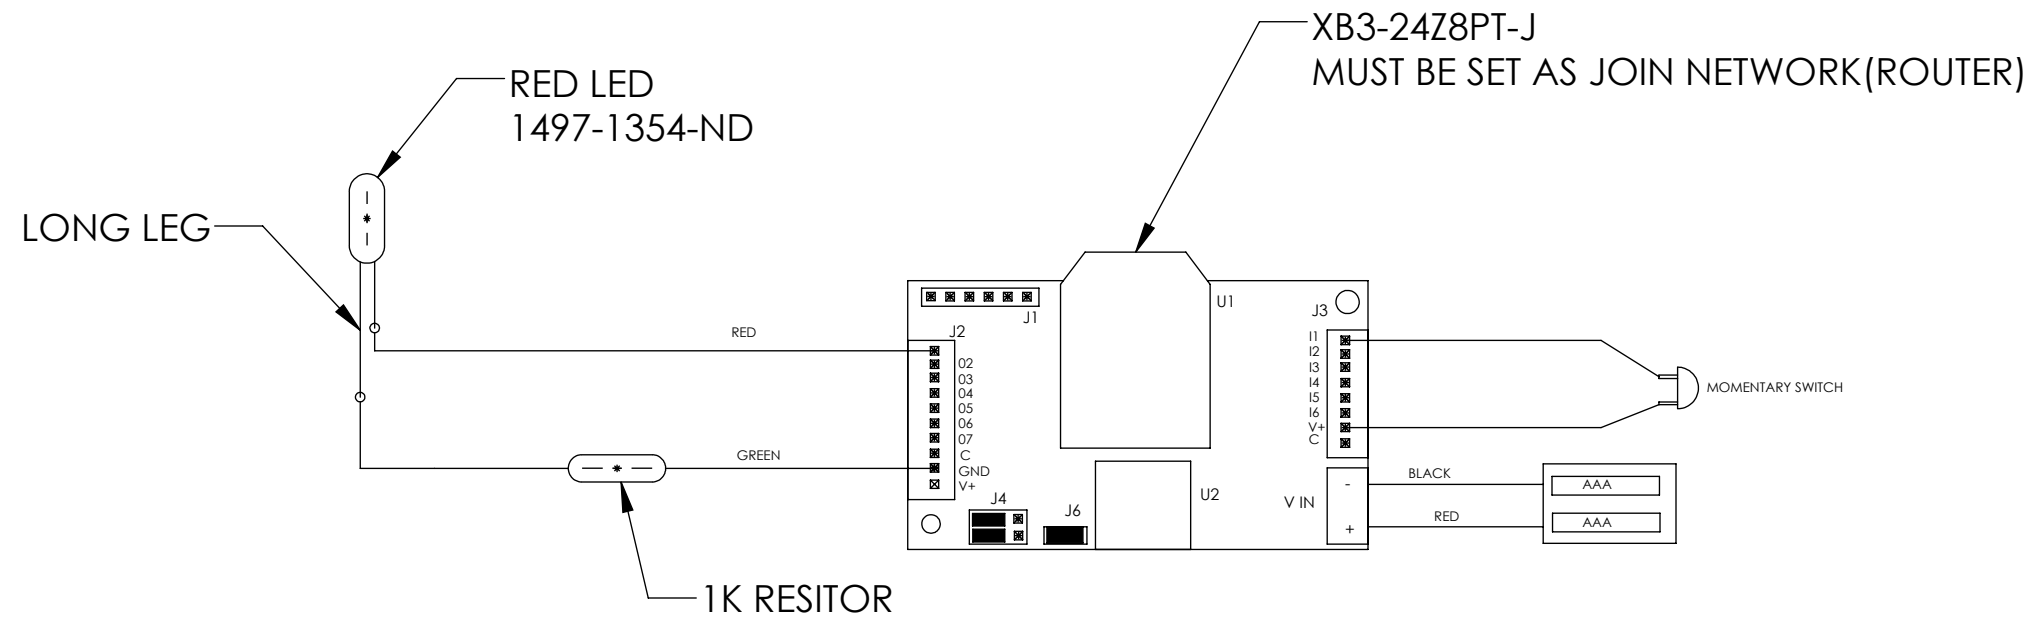

DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE	REMOTE CONTROL
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		MATERIAL	VENDOR
		FINISH	VENDOR#
		DES. BY	DRAWING NO.
		DESIGNED DATE	REV
		LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			


RC-SL60C COMBO WIRELESS LIGHTS - BUTTONS

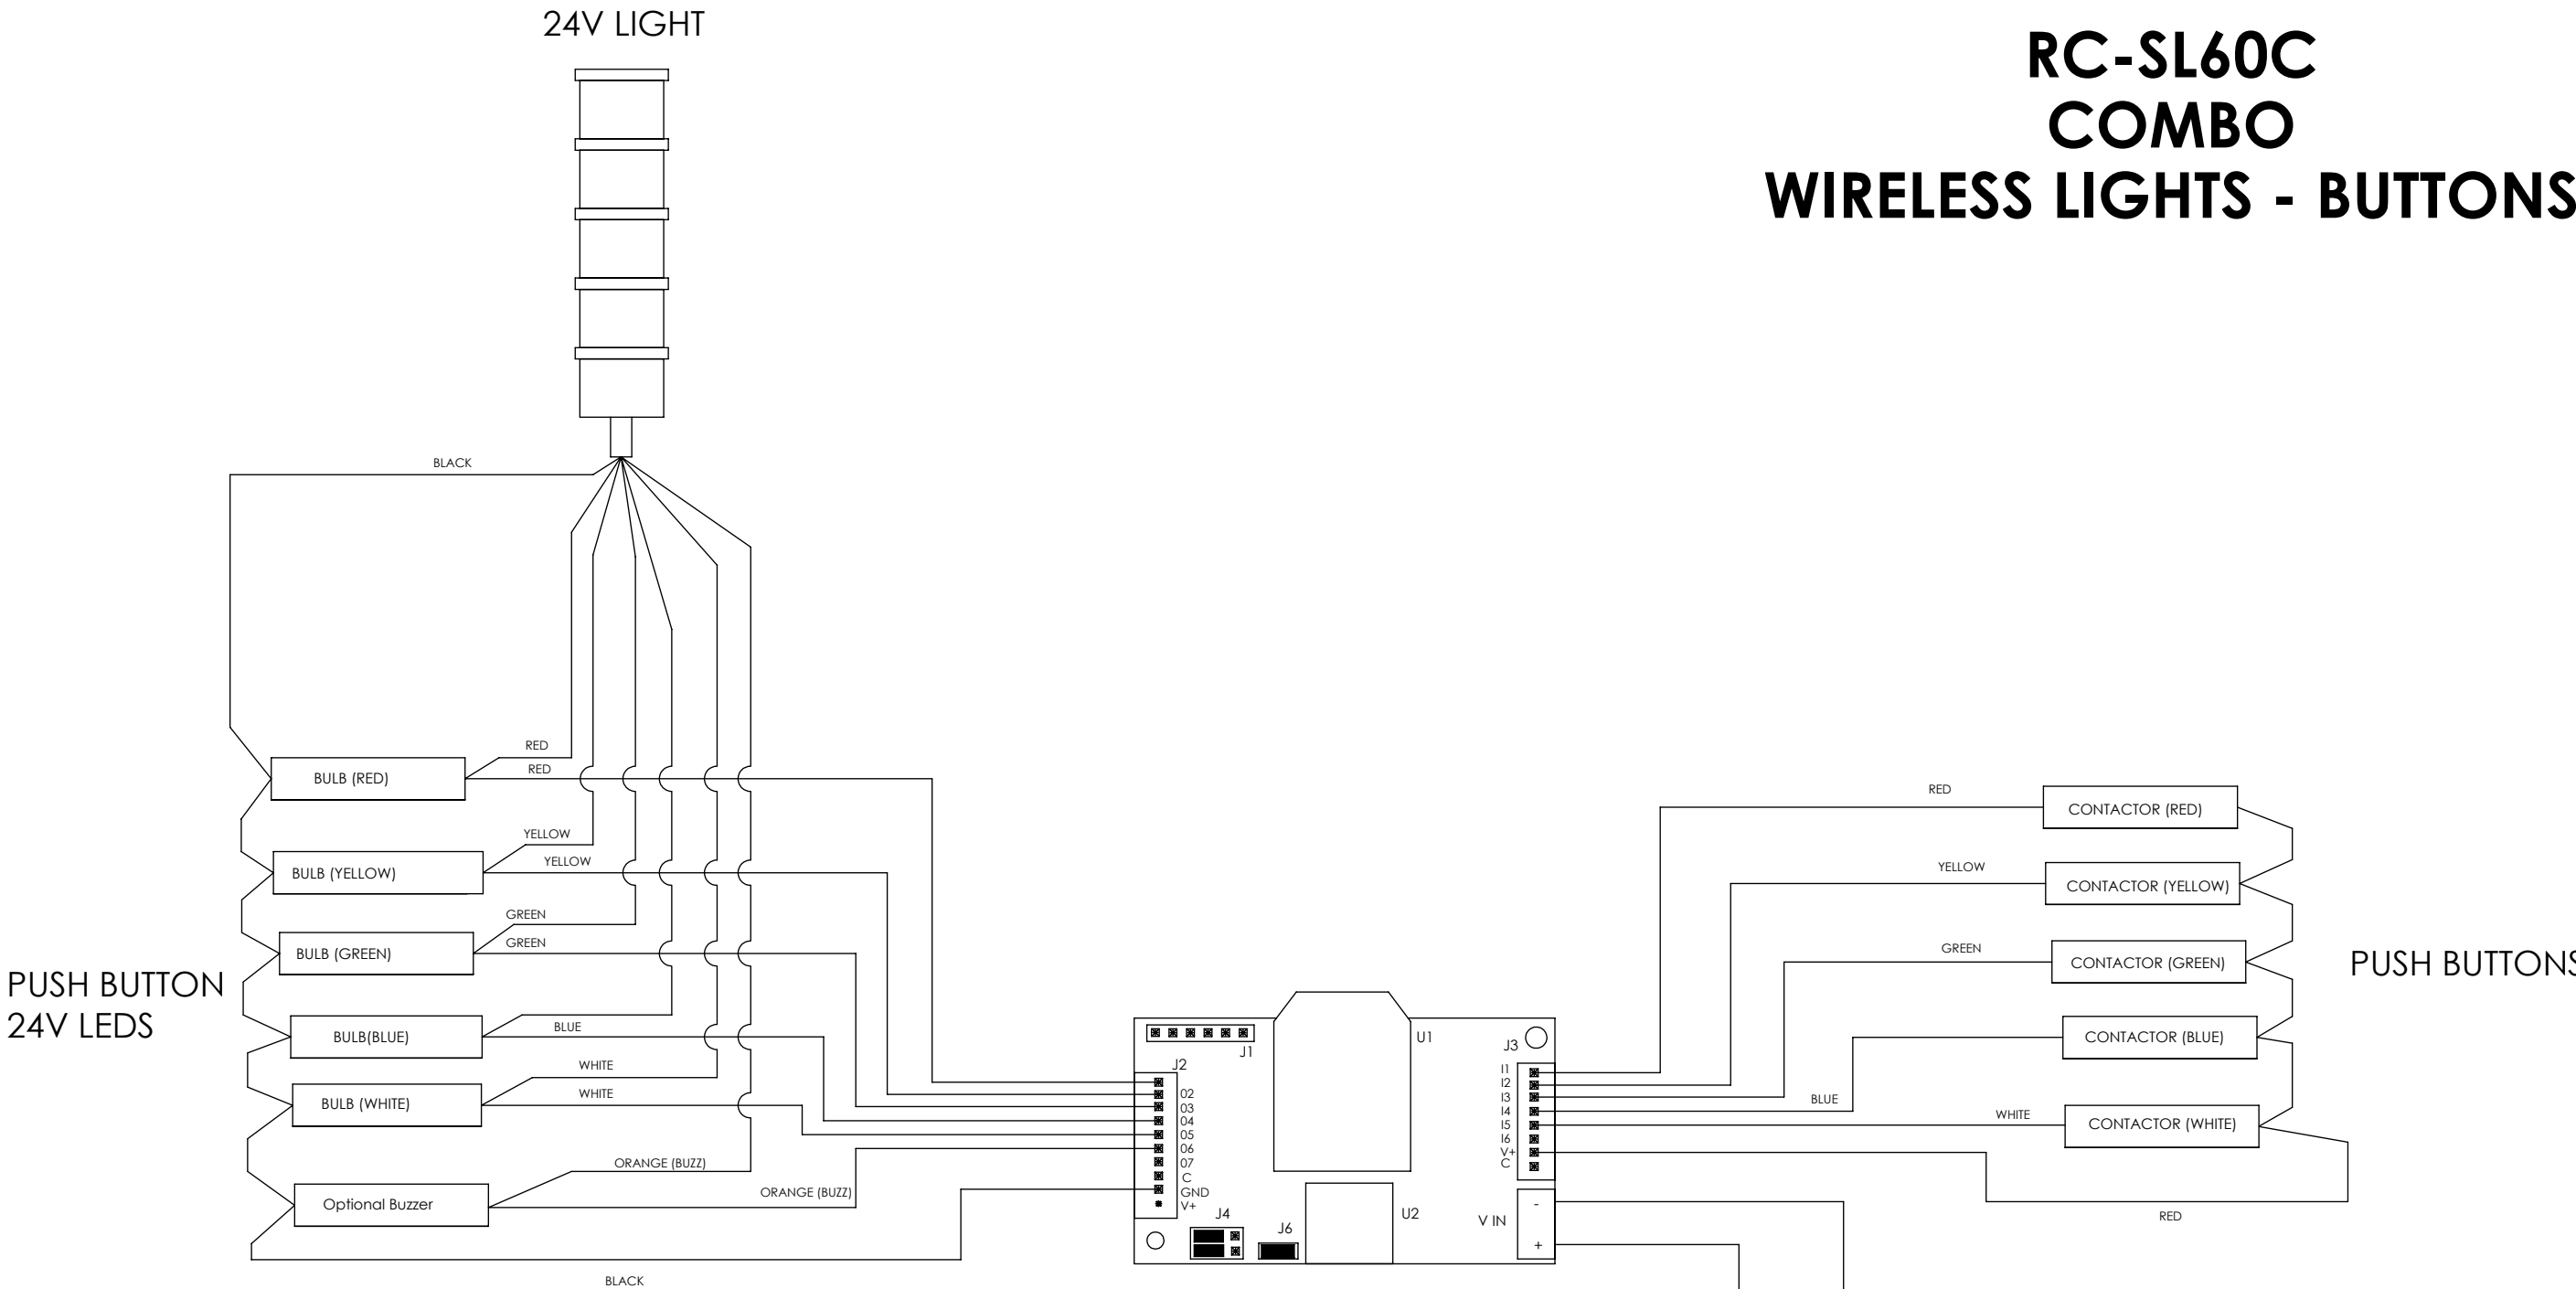

DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE	REMOTE CONTROL
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		MATERIAL	VENDOR
		FINISH	VENDOR#
		DES. BY	DRAWING NO.
		DESIGNED DATE	REV
		LAST SAVED DATE	
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

RC-SL60 WIRELESS LIGHT

24V LIGHT

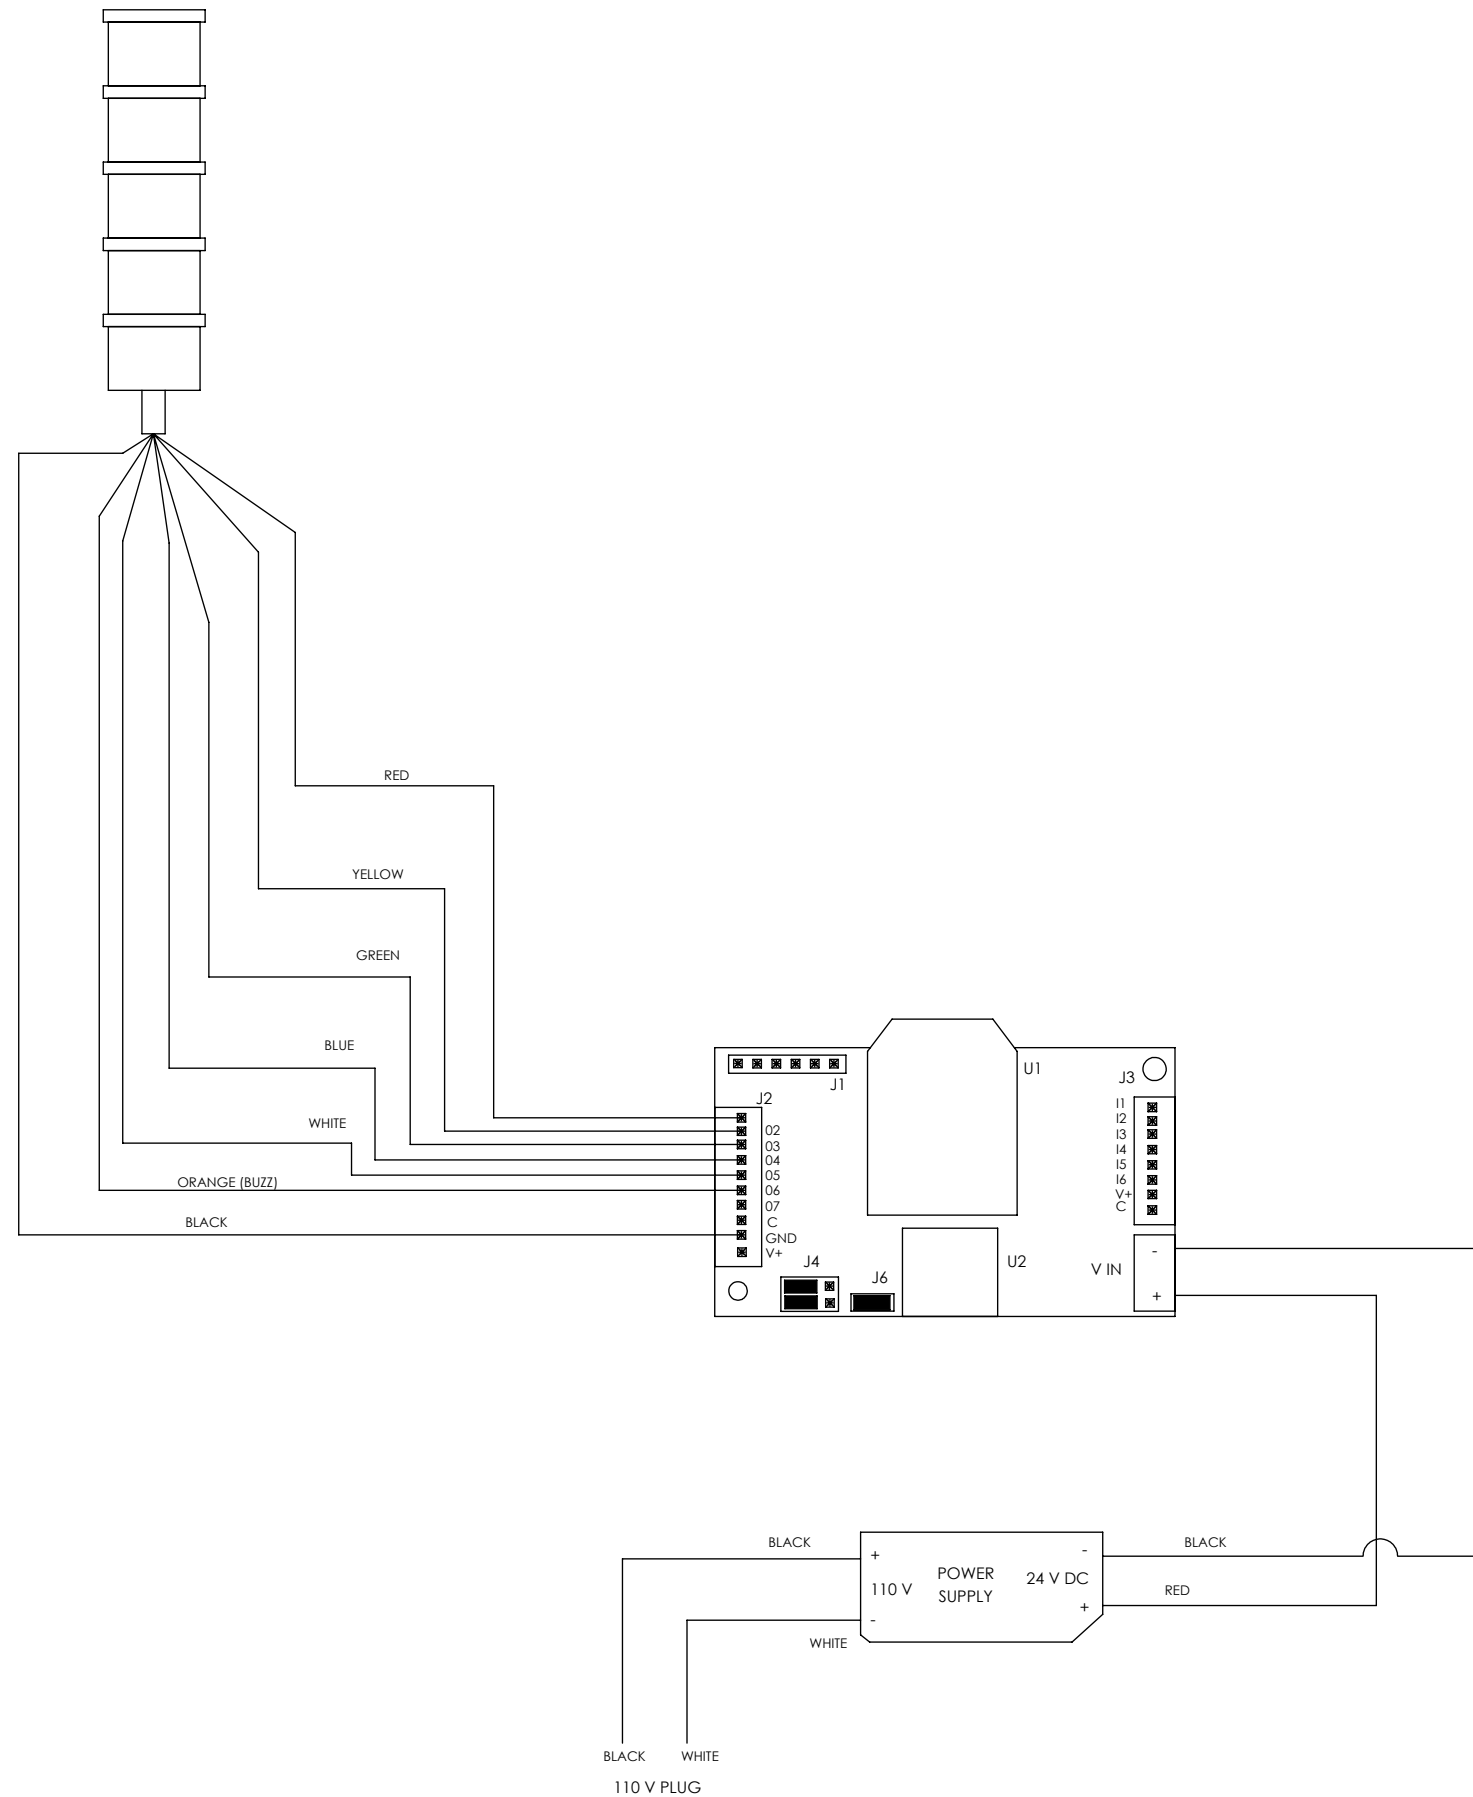

DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS:	TITLE REMOTE CONTROL	
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		DES. BY	VENDOR
BREAK ALL SHARP EDGES		DESIGNED DATE	VENDOR#
DWG SIZE: B		LAST SAVED DATE	DRAWING NO.
		WEIGHT	LBS
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

RC-IO-IN-OUT-PS


OUTPUTS

PIN#	COLOR	LIGHT FUNCTION	OUTPUT
1	RED	RED	1
2	BROWN	YELLOW	2
3	GREEN	GREEN	3
4	YELLOW	BLUE	4
5	GREY	WHITE	5
6	PINK	INDICATOR LED	6
7	BLUE		
8	WHITE	GND	

INPUTS

PIN#	COLOR	OUTPUT ACTIVATED	LIGHT FUNCTION
1	BROWN		COMMON
2	BLUE		BLUE LIGHT
3	WHITE		
4	GREEN	3	GREEN LIGHT
5	PINK	5	RED LIGHT
6	YELLOW	4	YELLOW LIGHT
7	BLACK	2	
8	GRAY	1	WHITE LIGHT
9	RED		
10	VIOLET		
11	ORANGE	6	BUZZER
12	LITE GREEN		

* LIGHT FUNCTIONS
SIGNIFIES NORMAL OPERATION
WHEN UNIT IS PAIRED WITH A WIRELESS LIGHT

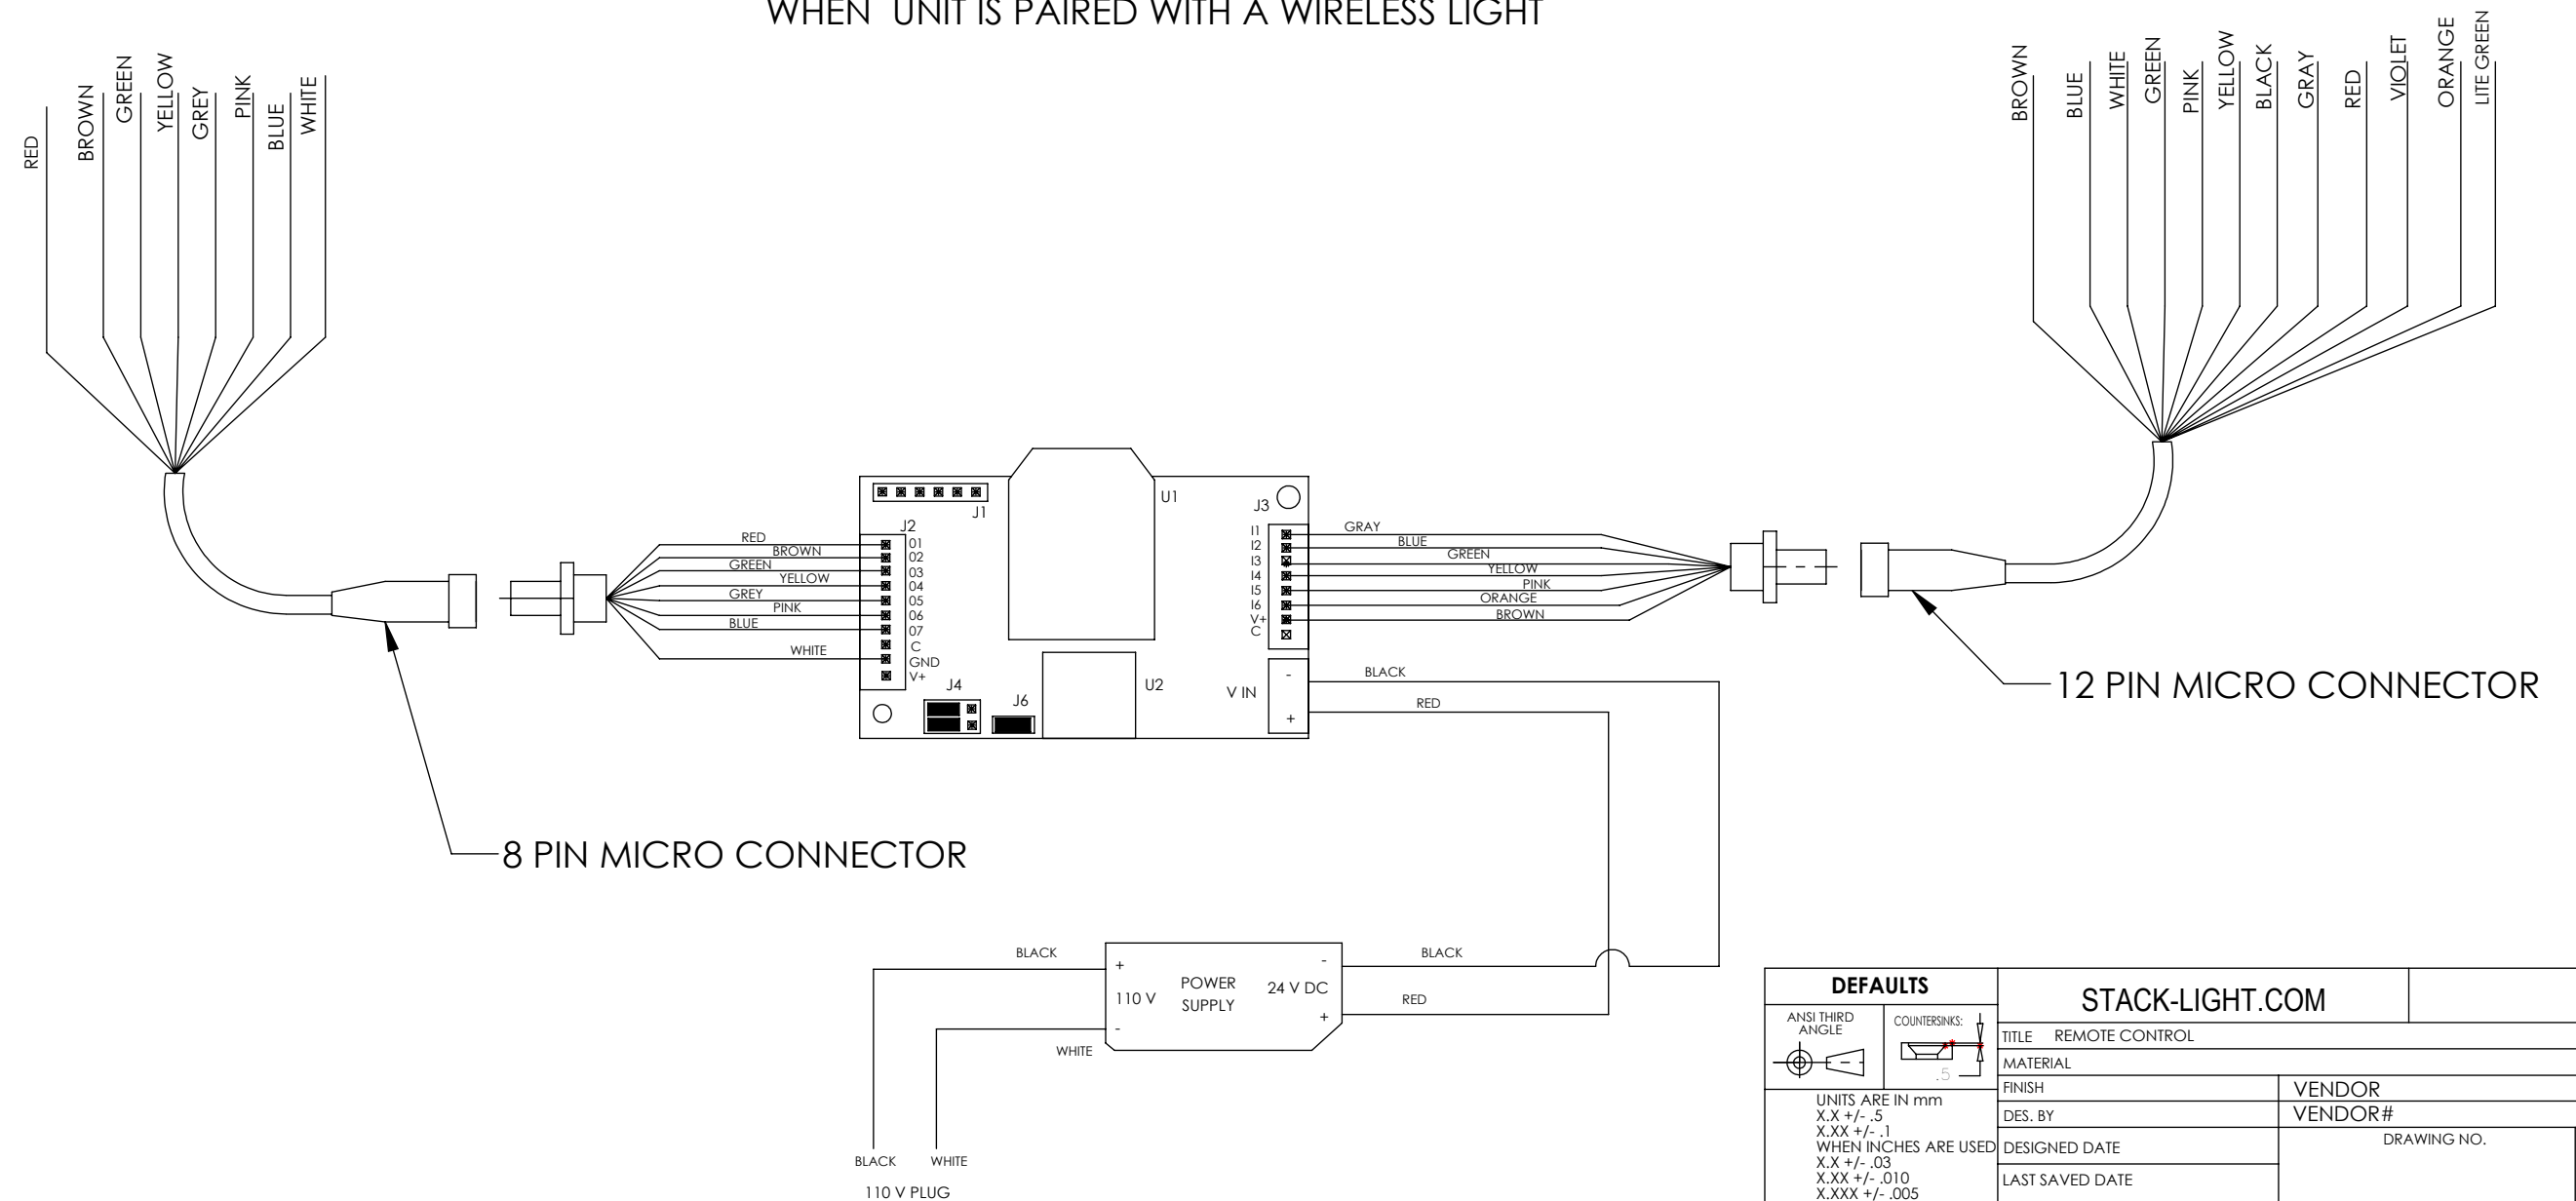

DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE	REMOTE CONTROL
UNITS ARE IN mm	X.X +/- .5	MATERIAL	
X.XX +/- .1	WHEN INCHES ARE USED	FINISH	VENDOR
X.X +/- .03		DES. BY	VENDOR#
X.XX +/- .010		DESIGNED DATE	DRAWING NO.
X.XXX +/- .005		LAST SAVED DATE	REV
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT	LBS
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

RC-IO-IN-OUT


OUTPUTS

PIN#	COLOR	LIGHT FUNCTION	OUTPUT
1	RED	RED	1
2	BROWN	YELLOW	2
3	GREEN	GREEN	3
4	YELLOW	BLUE	4
5	GREY	WHITE	5
6	PINK	INDICATOR LED	6
7	BLUE		
8	WHITE	GND	

* LIGHT FUNCTIONS
SIGNIFIES NORMAL OPERATION
WHEN UNIT IS PAIRED WITH A WIRELESS LIGHT

INPUTS

PIN#	COLOR	OUTPUT ACTIVATED	LIGHT FUNCTION
1	BROWN		COMMON
2	BLUE		BLUE LIGHT
3	WHITE		-24V DC
4	GREEN	3	GREEN LIGHT
5	PINK	5	RED LIGHT
6	YELLOW	4	YELLOW LIGHT
7	BLACK	2	+24V DC
8	GRAY	1	WHITE LIGHT
9	RED		
10	VIOLET		
11	ORANGE	6	BUZZER
12	LITE GREEN		

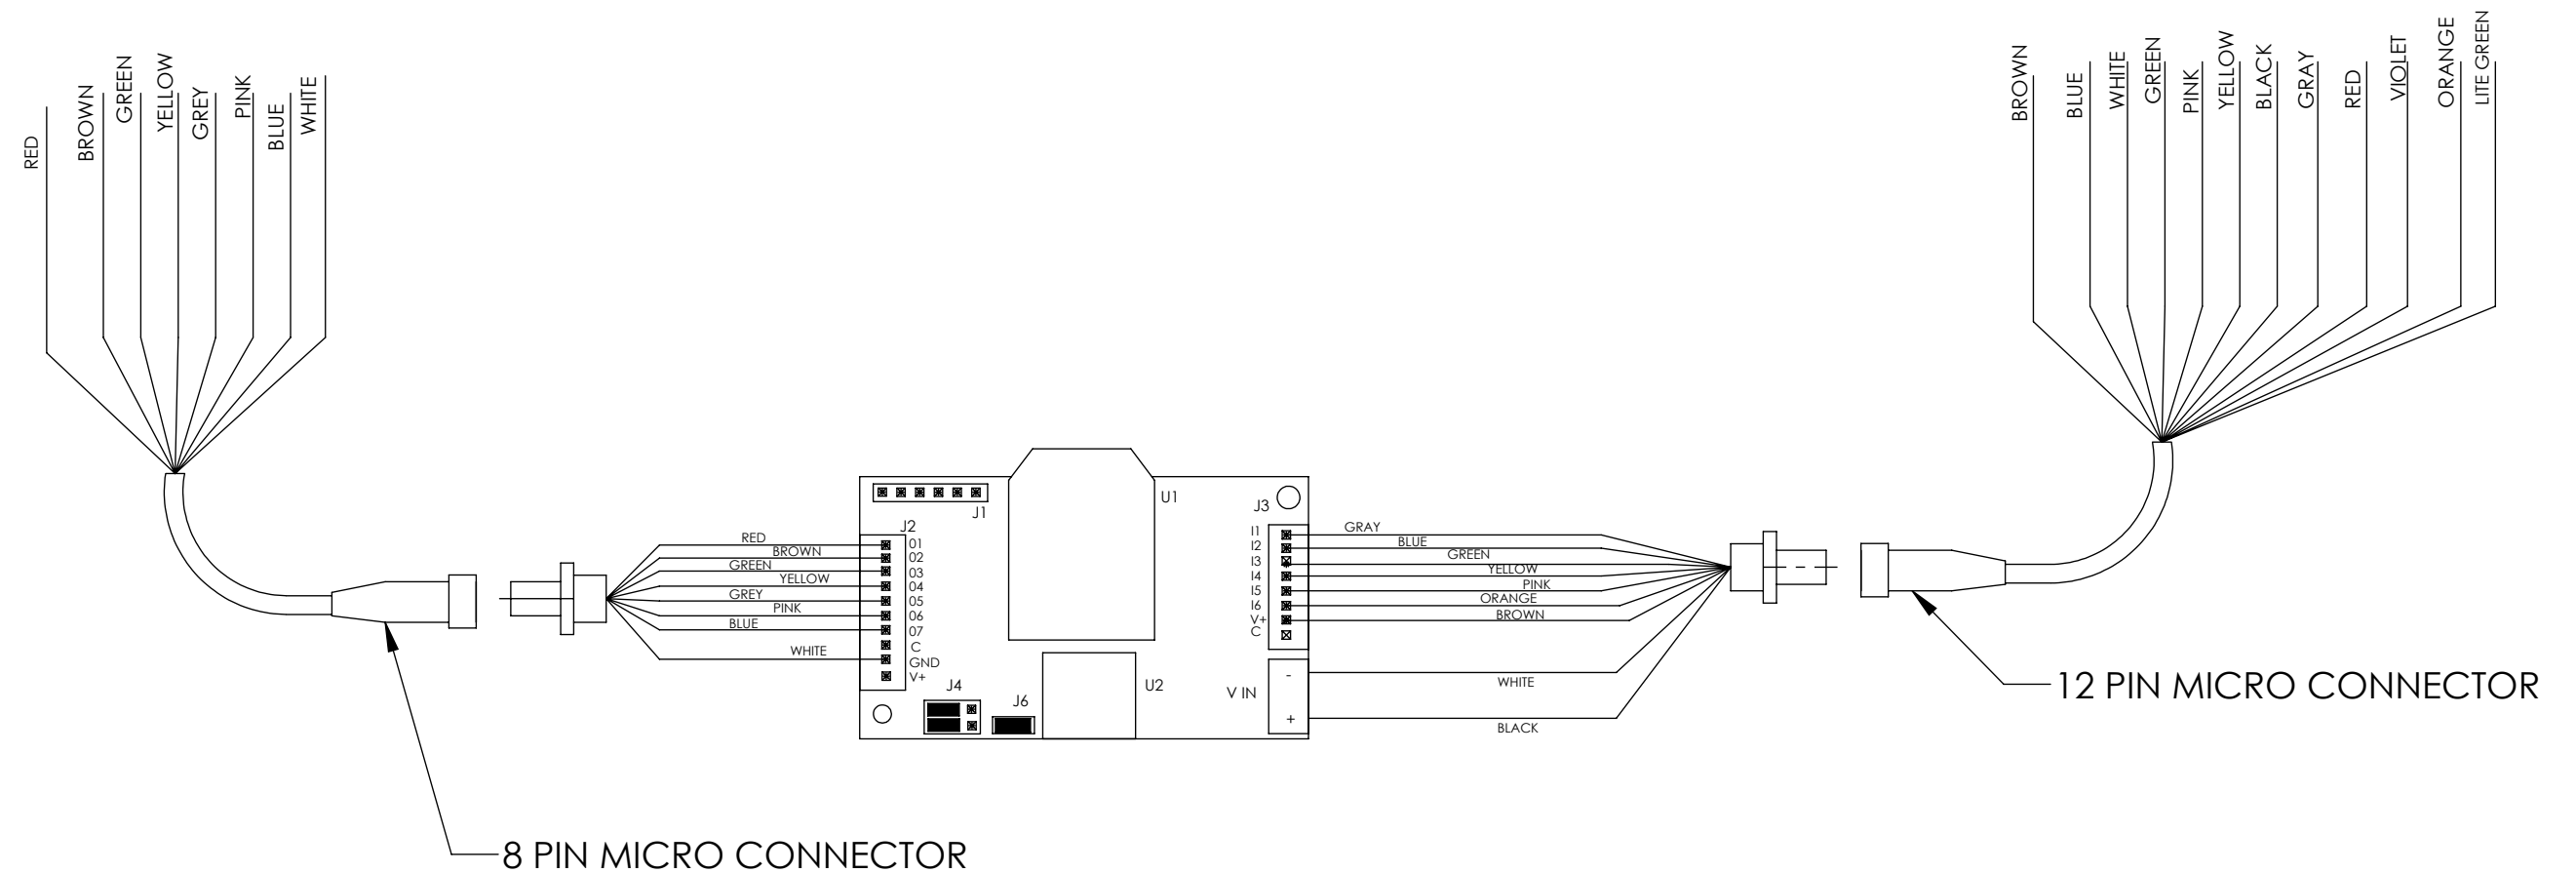


DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE	REMOTE CONTROL
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		MATERIAL	VENDOR
BREAK ALL SHARP EDGES	DWG SIZE: B	DES. BY	VENDOR#
		DESIGNED DATE	DRAWING NO.
		LAST SAVED DATE	REV
			WEIGHT LBS
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

RC-IO-OUT-PS

OUTPUTS

PIN#	COLOR	LIGHT FUNCTION	OUTPUT
1	RED	RED	1
2	BROWN	YELLOW	2
3	GREEN	GREEN	3
4	YELLOW	BLUE	4
5	GREY	WHITE	5
6	PINK	INDICATOR LED	6
7	BLUE		
8	WHITE	GND	

* LIGHT FUNCTIONS
SIGNIFIES NORMAL OPERATION
WHEN UNIT IS PAIRED WITH A WIRELESS LIGHT

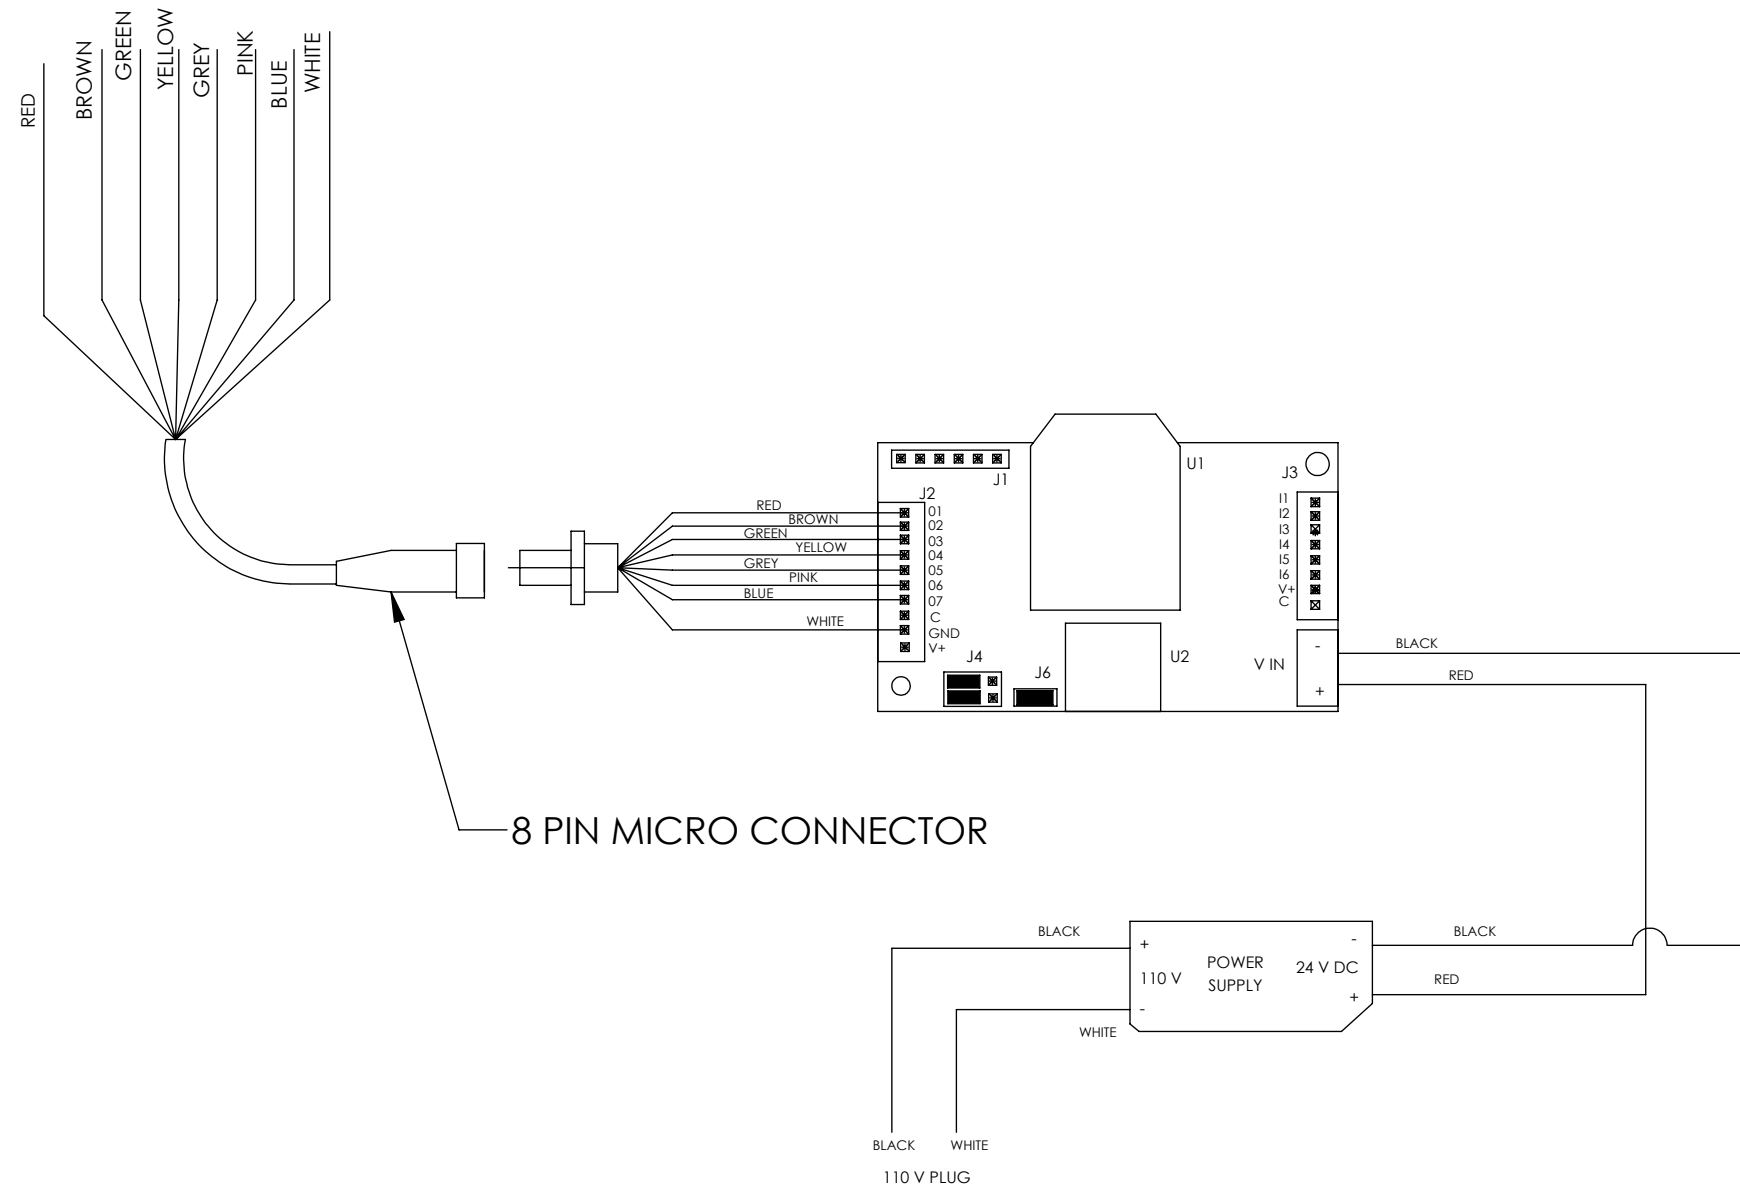


DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE REMOTE CONTROL	
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		DESIGNER	VENDOR
BREAK ALL SHARP EDGES		DESIGNED DATE	VENDOR#
DWG SIZE: B		LAST SAVED DATE	DRAWING NO.
		WEIGHT	REVISION
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

RC-IO-IN-L

24V LIGHT

PIN#	COLOR	FUNCTION
1	BROWN	COMMON
2	BLUE	BLUE LIGHT
3	WHITE	-24V DC
4	GREEN	GREEN LIGHT
5	PINK	RED LIGHT
6	YELLOW	YELLOW LIGHT
7	BLACK	+24V DC
8	GRAY	WHITE LIGHT
9	RED	
10	VIOLET	
11	ORANGE	BUZZER
12	LITE GREEN	

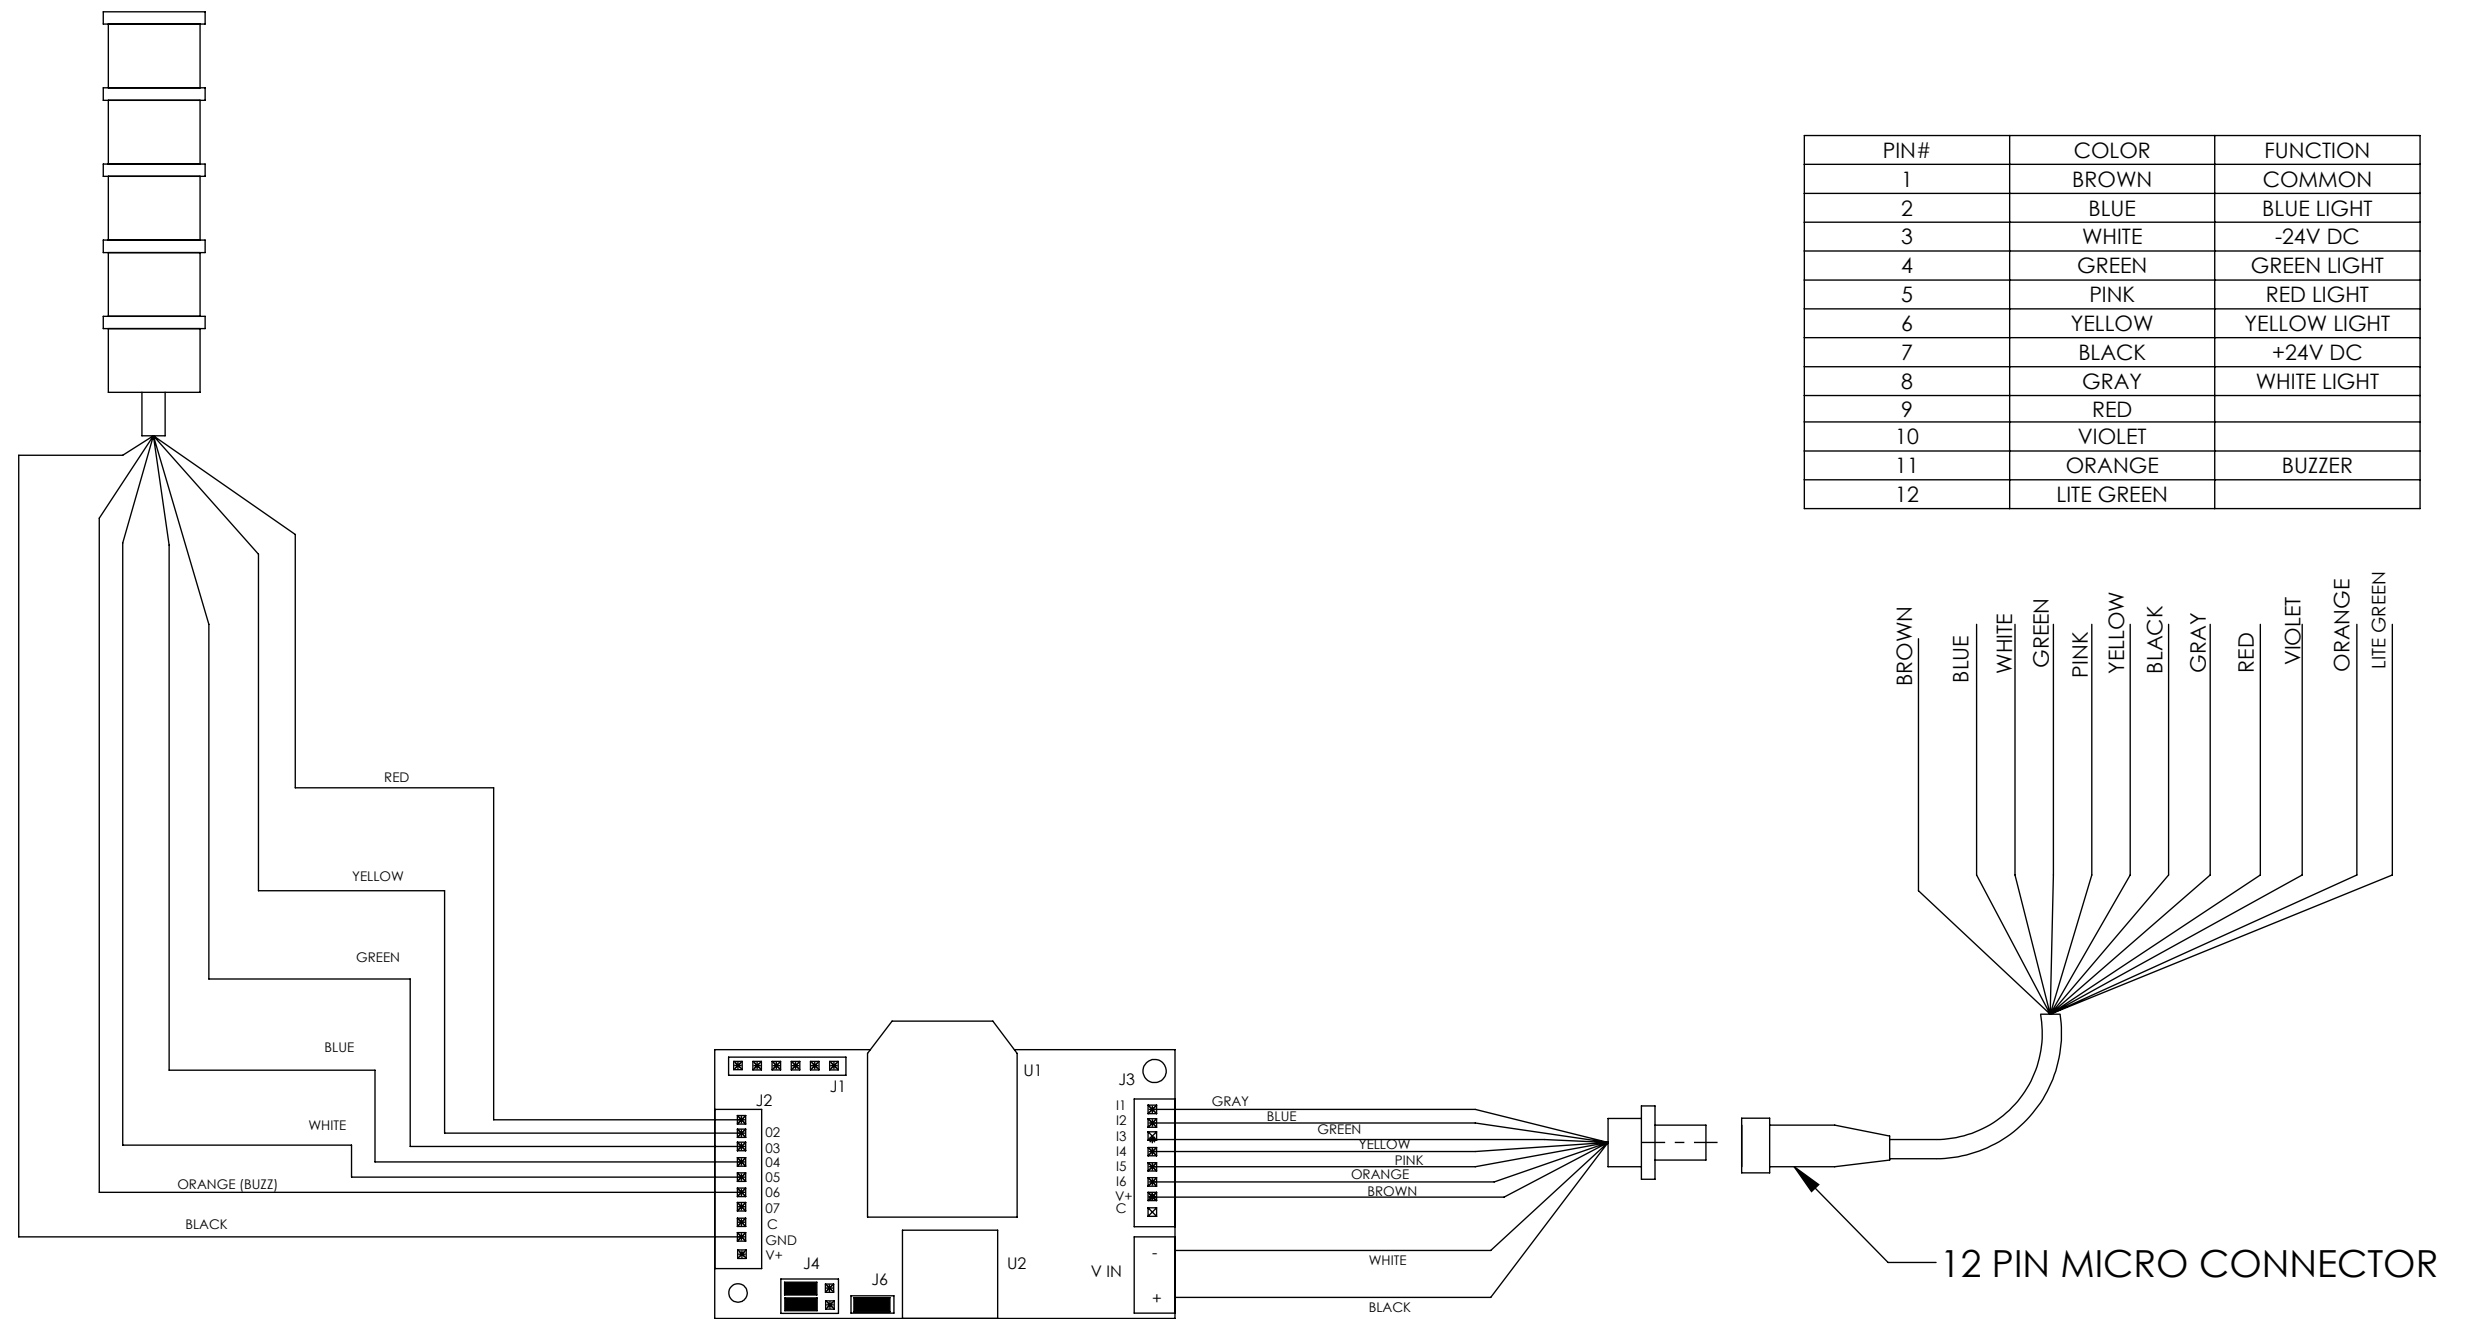


DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE	REMOTE CONTROL
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		MATERIAL	
		FINISH	VENDOR
		DES. BY	VENDOR#
		DESIGNED DATE	DRAWING NO.
		LAST SAVED DATE	REV
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM, IS PROHIBITED.			

RC-IO-IN-L-PS

24V LIGHT

PIN#	COLOR	FUNCTION
1	BROWN	COMMON
2	BLUE	BLUE LIGHT
3	WHITE	
4	GREEN	GREEN LIGHT
5	PINK	RED LIGHT
6	YELLOW	YELLOW LIGHT
7	BLACK	
8	GRAY	WHITE LIGHT
9	RED	
10	VIOLET	
11	ORANGE	BUZZER
12	LITE GREEN	

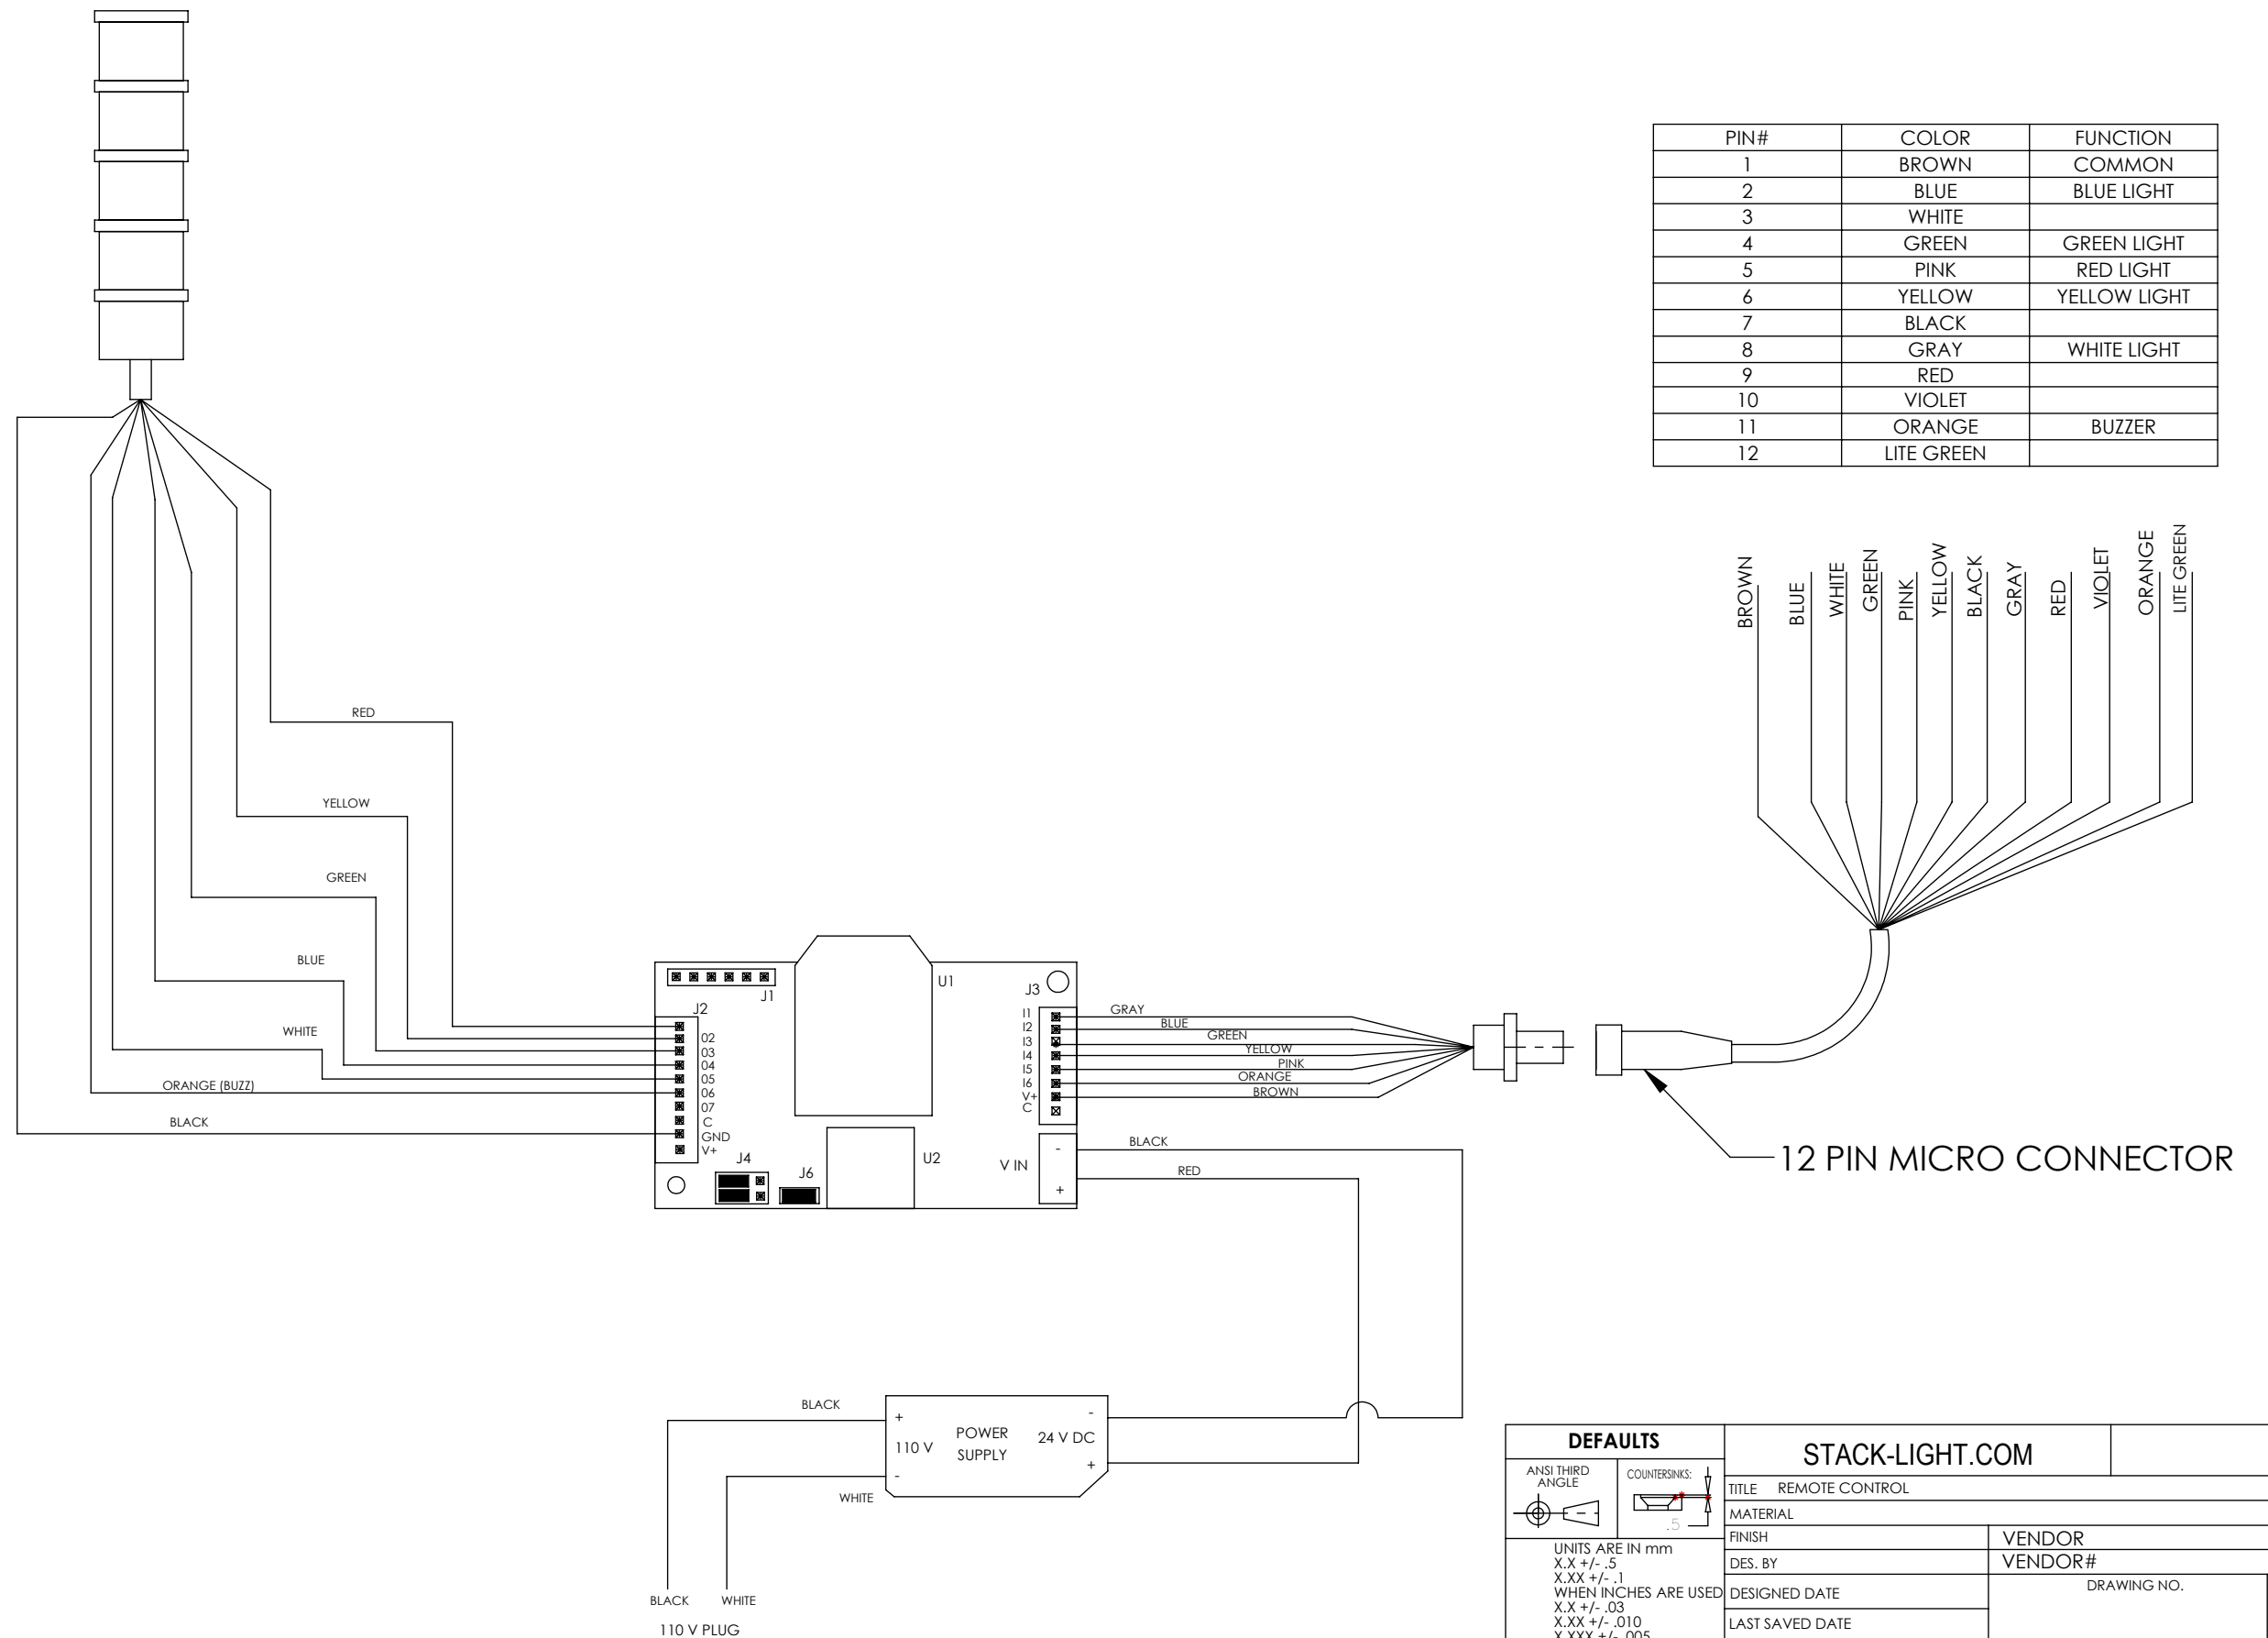


12 PIN MICRO CONNECTOR

DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE	REMOTE CONTROL
UNITS ARE IN mm	X.X +/- .5	MATERIAL	
X.XX +/- .1	X.XX +/- .1	FINISH	VENDOR
WHEN INCHES ARE USED	X.X +/- .03	DES. BY	VENDOR#
X.XX +/- .010	X.XX +/- .010	DESIGNED DATE	DRAWING NO.
X.XXX +/- .005	X.XXX +/- .005	LAST SAVED DATE	REV
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

RC-IO-IN-PS


PIN#	COLOR	FUNCTION
1	BROWN	COMMON
2	BLUE	BLUE LIGHT
3	WHITE	
4	GREEN	GREEN LIGHT
5	PINK	RED LIGHT
6	YELLOW	YELLOW LIGHT
7	BLACK	
8	GRAY	WHITE LIGHT
9	RED	
10	VIOLET	
11	ORANGE	BUZZER
12	LITE GREEN	

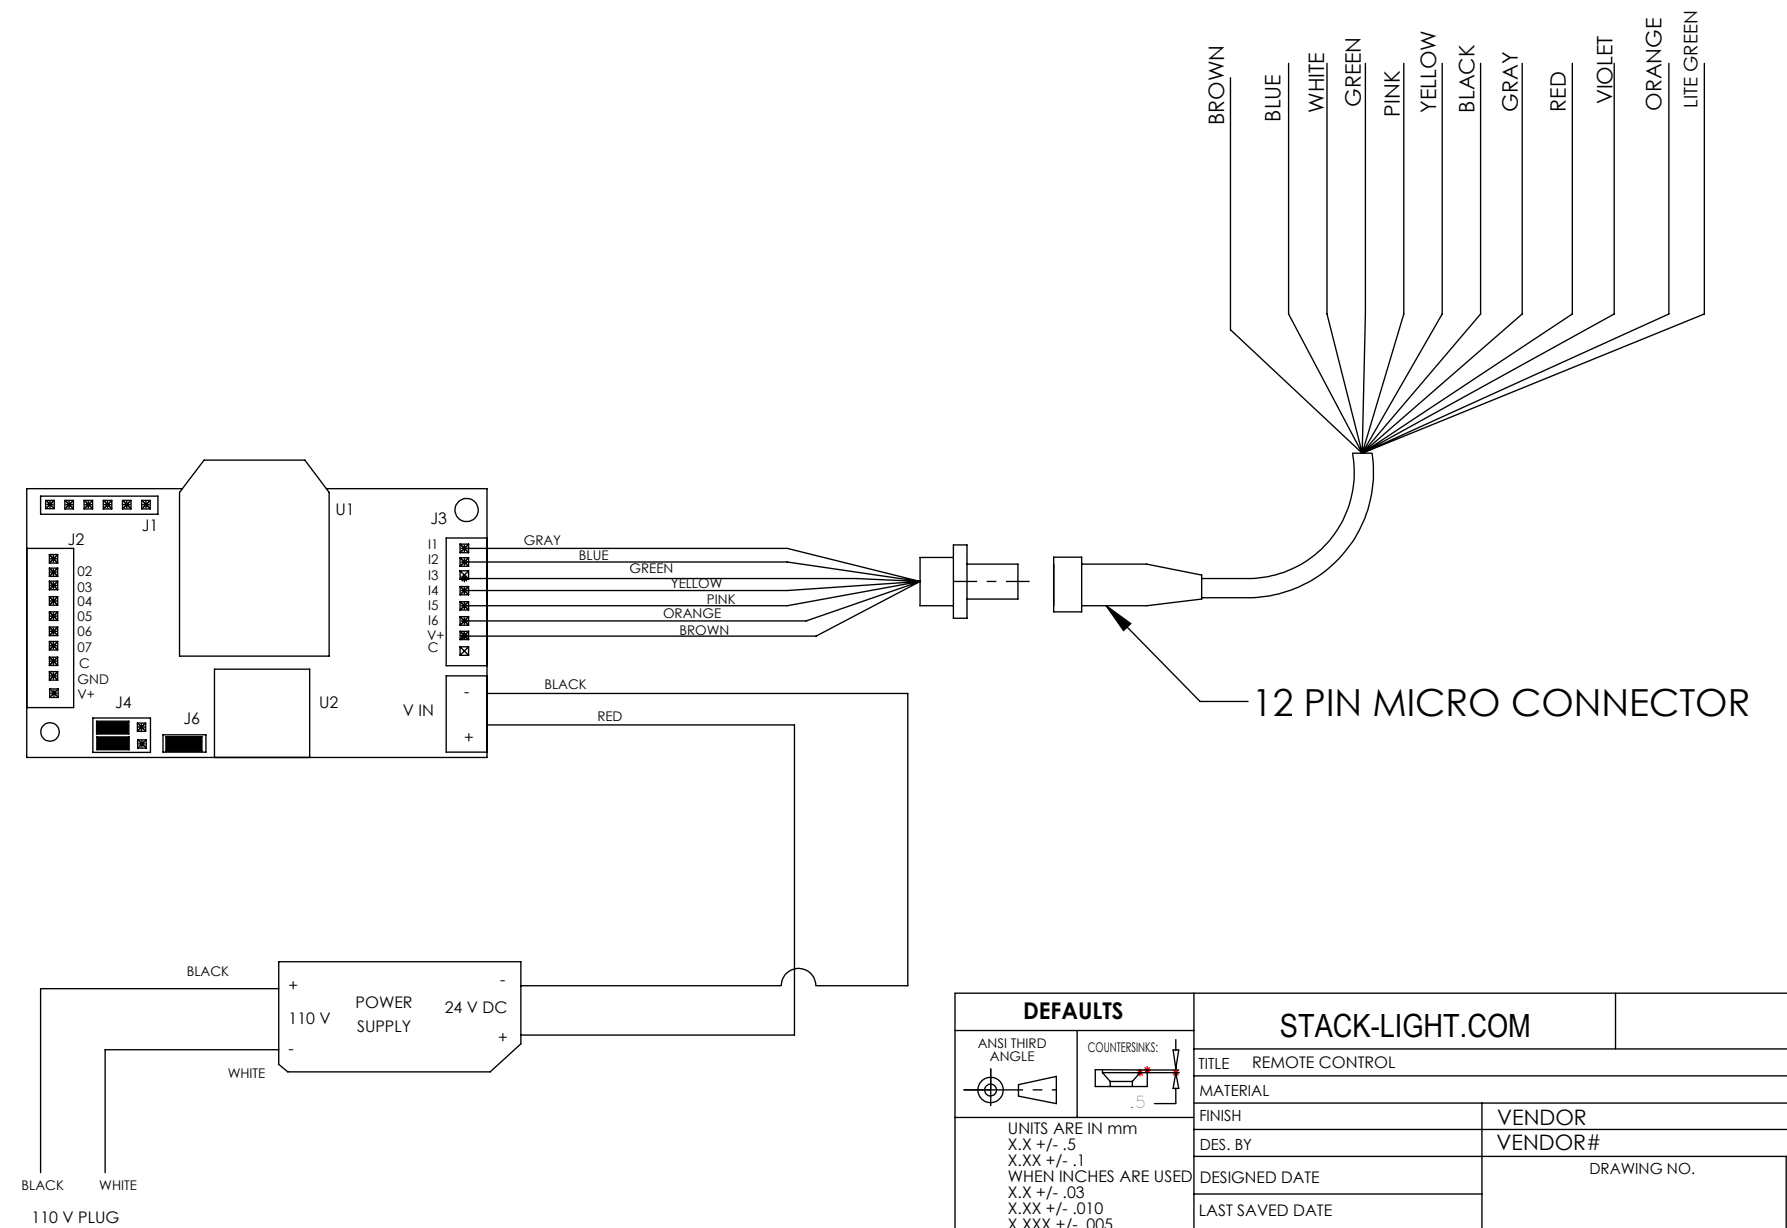

DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE	REMOTE CONTROL
UNITS ARE IN mm	X.X +/- .5	MATERIAL	
X.XX +/- .1	WHEN INCHES ARE USED	FINISH	VENDOR
X.X +/- .03	X.XX +/- .010	DES. BY	VENDOR#
X.XXX +/- .005		DESIGNED DATE	DRAWING NO.
		LAST SAVED DATE	REV
BREAK ALL SHARP EDGES	DWG SIZE: B	WEIGHT LBS	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

SL60-H (110V LIGHT)

ONLY USE FOR SPECIAL 110 V LIGHTS

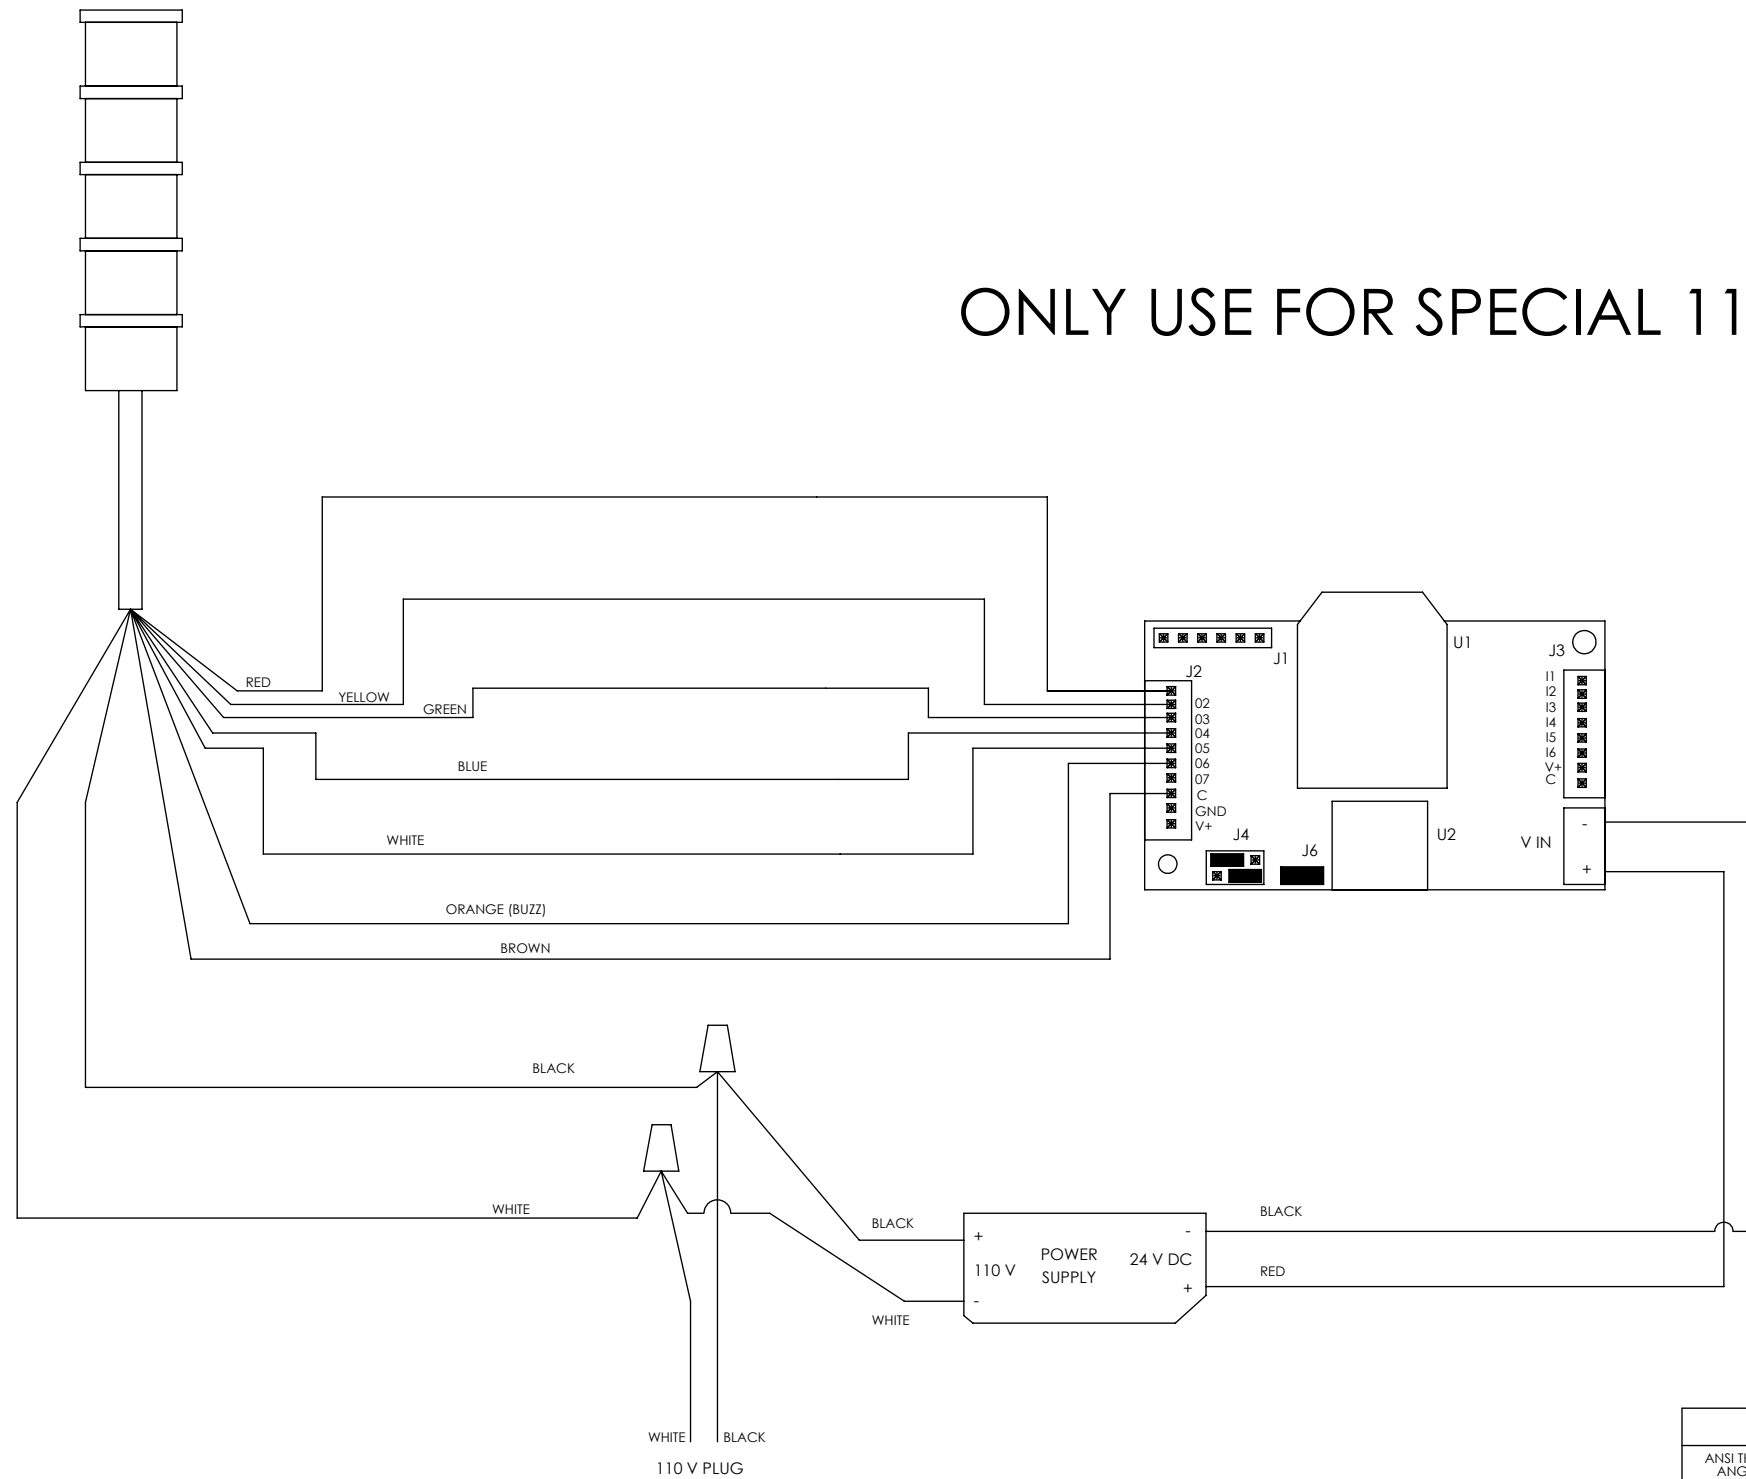


DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE WITH STACK-LIGHT	
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		DES. BY	VENDOR
BREAK ALL SHARP EDGES		DESIGNED DATE	VENDOR#
DWG SIZE: B		LAST SAVED DATE	DRAWING NO.
		WEIGHT	REVISION
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			

RC-IO-IN

INPUTS

PIN#	COLOR	OUTPUT ACTIVATED	LIGHT FUNCTION
1	BROWN		COMMON
2	BLUE		BLUE LIGHT
3	WHITE		-24V DC
4	GREEN	3	GREEN LIGHT
5	PINK	5	RED LIGHT
6	YELLOW	4	YELLOW LIGHT
7	BLACK	2	+24V DC
8	GRAY	1	WHITE LIGHT
9	RED		
10	VIOLET		
11	ORANGE	6	BUZZER
12	LITE GREEN		

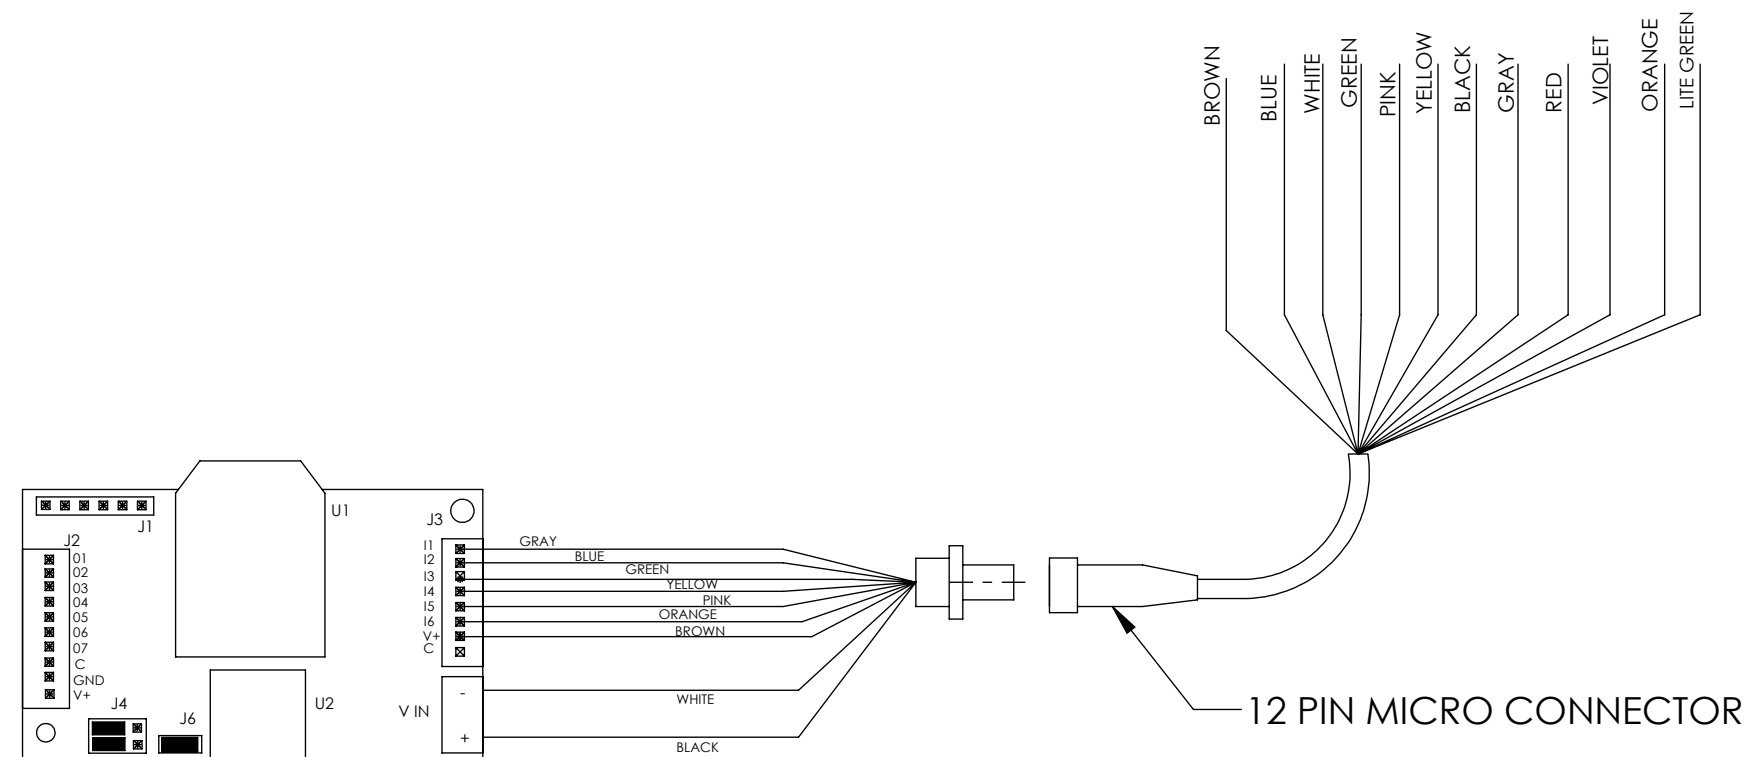

DEFAULTS		STACK-LIGHT.COM	
ANSI THIRD ANGLE	COUNTERSINKS: .5	TITLE	REMOTE CONTROL
UNITS ARE IN mm X.X +/- .5 X.XX +/- .1 WHEN INCHES ARE USED X.X +/- .03 X.XX +/- .010 X.XXX +/- .005		MATERIAL	VENDOR
BREAK ALL SHARP EDGES	DWG SIZE: B	DES. BY	VENDOR#
		DESIGNED DATE	DRAWING NO.
		LAST SAVED DATE	REV
			WEIGHT LBS
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF STACK-LIGHT.COM. ANY REPRODUCTION WITHOUT THE WRITTEN PERMISSION OF STACK-LIGHT.COM. IS PROHIBITED.			