

shown in Textured Bronze with  
Metal Blades and Decorative Cage



# Dagny

*Designed in 2011*



The double-headed 360° rotational fan, Dagny, with cylindrical central housing and straight, parallel arms, is designed in the retrospective aesthetic. The Dagny offers smooth and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Dagny carries a limited lifetime warranty. The Dagny is also available with a light kit as the **Dagny-LK**.

## Product Features



American  
Labor



AC  
Motor



360°  
Rotation



Safety Cage  
Compatible



Damp  
Location



Soothing  
White Noise



Remote  
Control



Unipack  
Shipping



shown in Textured Bronze with Barn Wood Blades



shown in Textured Bronze with Matte Black Blades



shown in Textured Bronze with Mahogany Blades



shown in Textured Bronze with Metal Blades and Safety Cage

# DAGNY

## FINISH AND BLADE OPTIONS

SKU#	DG-XX-XXXX (Model+Finish+Blade)	
Standard Finish	Textured Bronze	TB
NEW Blade Styles	Solid Wood / Barn Wood	WDBW
	Solid Wood / Mahogany	WD
	Solid Wood / Matte Black	WDBK
	Metal w/ Decorative Cage	MTL
	Metal w/ Safety Cage	MSAF

## TECHNICAL SPECS

Fan Weight	22 lbs
Voltage	110 (Contact us for 220 conversion)
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable, Non-Threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Overall Drop	14 inches / 36 cm + downrod length
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

## NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	41 inches / 104 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	807 / 1256	1035 / 1448
CFM (Low / High)	2197 / 3393	2199 / 3169
Watts (High)	100.40	80.69
CFM/Watt (High)	33.80	39.27
Blade Pitch	19°	31°

## STANDARD EQUIPMENT

- One downrod of 10 inches / 13 cm
- Vaulted ceiling canopy for up to 29°

## ACCESSORY

Black 3-speed RF remote control with reverse




Decora-style, 3-speed, non-dimmable wall control



# Dagny

## TECHNICAL SPECIFICATIONS

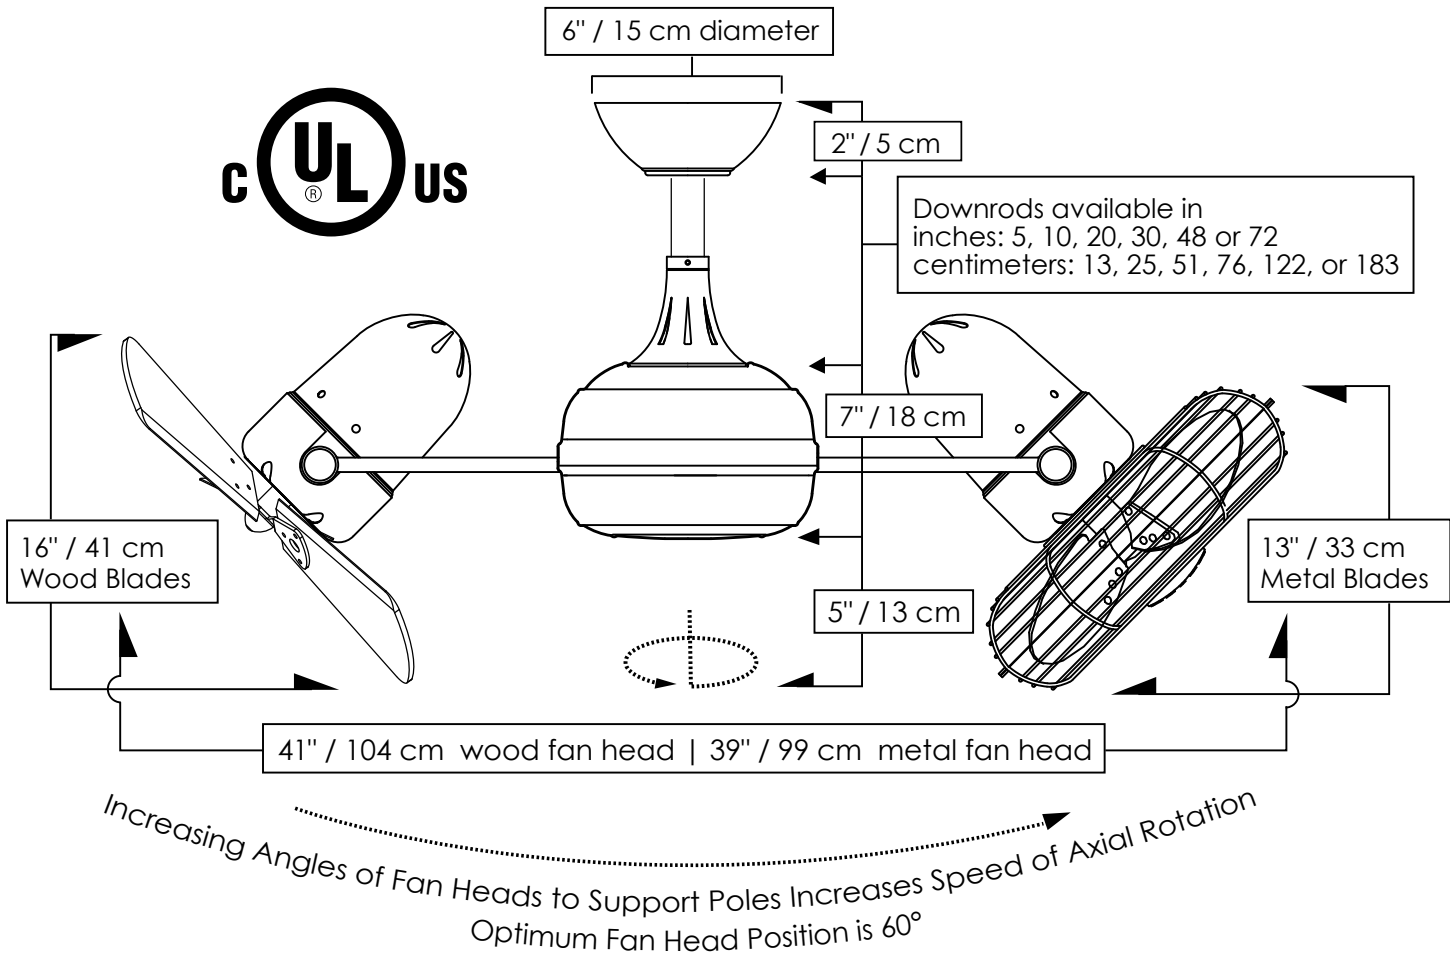

**CEILING PITCH TABLE**

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

**CEILING HEIGHT / DOWNROD TABLE**

Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

**Matthews Fan Company**

1881 Industrial Drive  
Libertyville, IL 60048  
Tele: 847.680.9043  
Fax: 847.680.8140  
www.matthewsfanco.com

© 2020 Matthews Fan Company. All rights reserved.

