



Benefits

- Perfect LED replacement for halogen lamps in applications where the faithful colour reproduction associated with natural light is crucial
- Offers perfect linear dimming which is compatible with most popular dimmers in the market
- Compact & powerful

Application



Home



Hotel



Retail

Model	Item Description	W	PF	lm	lm/W	CRI	Beam	Temp	Life	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
LG2603.8dR9v2-E14	BULB P45 3.8W E14 MK 2800K DIM	3.8	0.5	250	66	>90	240°	25000		44*44*83	290*242*191	60
LG2603.8dR9v2-E14	BULB P45 3.8W E14 MK 6500K DIM	3.8	0.5	250	66	>90	240°	25000		44*44*83	290*242*191	60
LG2605.5dR9-E14	BULB P45 5.5W E14 MK 2800K DIM	5.5	0.5	470	85	>90	240°	25000		44*44*83	290*242*191	60
G45C7BR-D-5.6W-E27	SIGV1 G45 5.6W E27 FS 2800K DIM	5.6	0.5	500	89	>90	240°	25000		44*44*83	290*242*191	60
LG2605.5dR9-E27	BULB P45 5.5W E27 MK 4000K DIM	5.5	0.5	470	85	>90	240°	25000		44*44*83	290*242*191	60
LG2605.5dR9-E27	BULB P45 5.5W E27 MK 6500K DIM	5.5	0.5	470	85	>90	240°	25000		44*44*83	290*242*191	60

Application Conditions


IP	IP20
Operating Temperature	-20~40°C
Application Temperature	25°C
Storage Environment	-25~50°C

Mechanical Properties

Optical Material	PC
Housing Material	PBT
Finishing Colour	White

Electrical Supply

Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

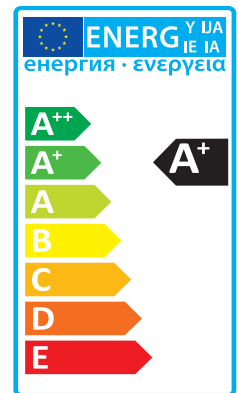

Dimensional Drawing

