



Design by Nahtrang Design



The photograph may not match the reference exactly. Please read the product description to identify the finish.

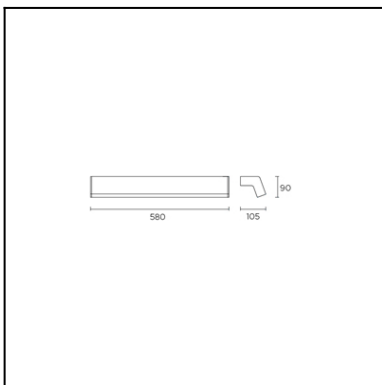


Download photometric file .ldt /.ies

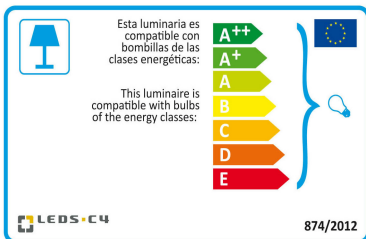

Click on image to download energy label

### TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	2 x G5 14W
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	1.175
EAN:	8435111089859



### MATERIALS / FINISHES

<b>Structure material:</b>	Extruded aluminium	<b>Diffuser material:</b>	Polycarbonate
<b>Structure finish:</b>	Chrome	<b>Diffuser finish:</b>	Matt opal


### GEAR

Gear included: Yes, electronic

<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>		
Code	05-4699-21-M1	Code	05-4699-21-M1	Code	TL5 HE sup80 14W/840	
Name	Aplique 2x14W t dif. acrílico	Name	Aplique 2x14W t dif. acrílico	Number	2	
Line	Eulumdat	Date	25-06-2013	Position		
Efficiency	41.55%	Coordinate system	CG	Total Flux	2400.00 lm	
Maximum value	185.88 cd	Position	C=0.00 G=0.00	Sym. on planes	270-90	
Rectangular Luminaire	Length	87 mm	Width	585 mm	Height	106 mm
Rectangular Luminous Area	Length	70 mm	Width	575 mm	Height	45 mm
Horizontal Luminous Area	0.040250 m2	Emitting area on Plane 180°	0.003150 m2			
Emitting area on Plane 0°	0.003150 m2	Emitting area on Plane 270°	0.025875 m2			
Emitting area on Plane 90°	0.025875 m2	Glare area at 76°	0.012794 m2			
Symmetry Type	Sym. on planes 270-90	Maximum Gamma Angle	180			
Measurement Distance	0.00	Measurement Flux	2400.00 lm			
Operator	Asselum T2	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	TL5 HE sup80 14W/840	TL5 HE sup80 14W/840 - 14.00 W	1200.00	14.00	2
C.I.E.	37 65 85 70 42	D DIN 5040	B21		
F UTE	0.29 H + 0.13 T	B NBN	BZ 6		

87mm x 585mm



**C Halfplanes**

270.0 — Blue line  
 180.0 — Red line  
 0.0 — Red line  
 90.0 — Blue line

ULOR 12.56 %  
 DLOR 28.99 %  
 RN 30.23 %

