


Design by Nahtrang Design




The photograph may not match the reference exactly. Please read the product description to identify the finish.

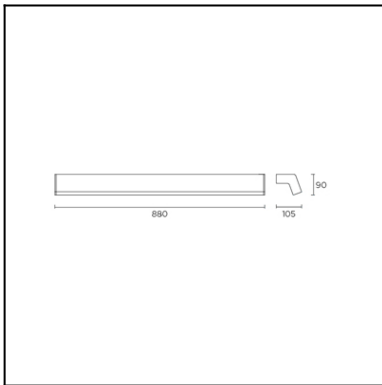

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	2 x G5 21W
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	1.555
EAN:	8435111089866




MATERIALS / FINISHES

Structure material:	Extruded aluminium	Diffuser material:	Polycarbonate
Structure finish:	Chrome	Diffuser finish:	Matt opal

GEAR

Gear included: Yes, electronic

[Download photometric file .ldt / .ies](#)

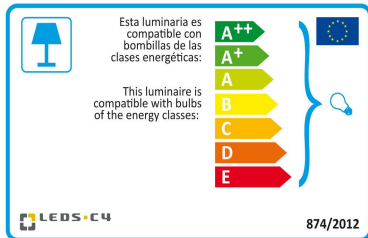


[Click on image to download energy label](#)

Luminaire		Measur.		Lamp			
Code	05-4700-21-M1	Code	05-4699-21-M1	Code	TL5 HE sup80 21W/840		
Name	Aplique CONCEPT 2x21W T5	Name	Aplique CONCEPT 2x21W T5	Number	2		
Line	Eulumdat	Date	25-06-2013	Position			
Efficiency	41.55%	Coordinate system	CG	Total Flux	4200.00 lm		
Maximum value	325.30 cd	Position	C=0.00 G=0.00	Sym. on planes	270-90		
Rectangular Luminaire	Length	90 mm	Width	880 mm	Height	105 mm	
Rectangular Luminous Area	Length	70 mm	Width	870 mm	Height	45 mm	
Horizontal Luminous Area	0.060900 m2	Emitting area on Plane 180°	0.003150 m2	Emitting area on Plane 270°	0.039150 m2	Glare area at 76°	0.017789 m2
Symmetry Type	Sym. on planes 270-90	Maximum Gamma Angle	180	Measurement Flux	4200.00 lm		
Measurement Distance	0.00						
Operator	Asselum T2	Source voltage		Source current		Photocell	
Temperature	25.00 °C						
Humidity	60.00 %						
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	TL5 HE sup80 21W/840	TL5 HE sup80 21W/840 - 21.00 W	2100.00	21.00	2	
C.I.E.	37 65 85 70 42	D DIN 5040		B21		
F UTE	0.29 H + 0.13 T	B NBN		BZ 6		

90mm x 880mm



ULOR	12.56 %
DLOR	28.99 %
RN	30.23 %

