


LED with lifespan 50,000 burning hours
Box type double sided emergency exit light

EMERGENCY EXIT LIGHTS DOUBLE SIDED BOXSTER



● **BHD/M/W510RM (E/W)**
Running-man graphical exit signs
comply to latest SS 563 & SS 508

● **BHD/M/W5100 (R/L)**

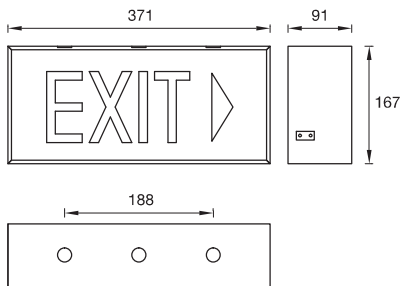

Dimension: mm NTS

TECHNICAL DATA

Mode of Operation	: Maintained
Lamp	: Maxspid 1W SMT LED Lamp (x2)
Rated Duration	: 2 hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: <3W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED Ø5mm
Test Facility	: Micro switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Fitting Construction	: Electro galvanised steel with epoxy powder coating
Diffuser	: Fire retardant moulded acrylic
Mounting	: Ceiling
Cable Entry	: Ø20mm K/O hole
Weight	: 1.7kg (gross)
Compliance	: SS 563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	: 1 year

KEY FEATURES

- > Using Surface Mount Technology LED
- > High Durability & Reliability
- > Low Heat
- > Low Maintenance
- > Low Power Consumption
- > No "Black Ends"

ORDERING GUIDE (Please check with Sales Dept. if customisation is required)

Double Sided	Legend
BHD/M/W5100	
BHD/M/W5100 (R/L)	
BHD/M/W5100 (R/L)	
BHD/M/W510RM	
BHD/M/W510RM (E/W)	
BHD/M/W510RM (E/W)	



Surface Mount
Box Exit Sign

