


# EMERGENCY EXIT LIGHTS BOXSTER RECESS

SMT LED with lifespan 50,000 burning hours  
Fully-recessed low level SMT LED emergency exit light



● **BLR/M/W510RM (E) MINI**  
Running-man graphical exit signs  
comply to latest SS 563 & SS 508

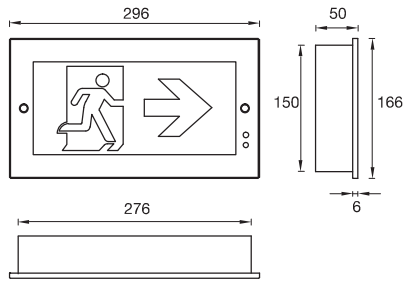

Dimension: mm NTS

## TECHNICAL DATA

Mode of Operation	: Maintained
Lamp	: Maxspid 1W SMT LED Lamp
Rated Duration	: 2 hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: < 3W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED Ø5mm
Test Facility	: Micro switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Fitting Construction	: Electro galvanised steel with epoxy powder coating
Diffuser	: Fire retardant moulded acrylic
Mounting	: Wall fully-recessed
Cable Entry	: Ø20mm K/O hole
Weight	: 1.6kg (gross)
Compliance	: SS 563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	: 1 year

## KEY FEATURES

- > Using Surface Mount Technology LED
- > High Durability & Reliability
- > Low Heat
- > Low Maintenance
- > Low Power Consumption
- > No "Black Ends"

## ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Single Sided	Legend
BLR/M/W510RM MINI	
BLR/M/W510RM (E) MINI	
BLR/M/W510RM (W) MINI	



Type and batch tested with  
PSB PLS-LISTED LABEL



280 x 153mm

Fully-recessed  
Low Level Exit Sign



IP30  
CLASS I



Specifications subject to changes without prior notice.

