



Design by Josep Patsí



The photograph may not match the reference exactly. Please read the product description to identify the finish.

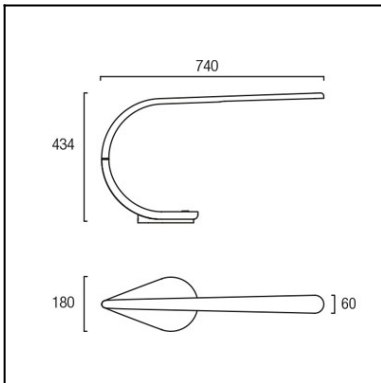

[Download photometric file .ldt / .ies](#)

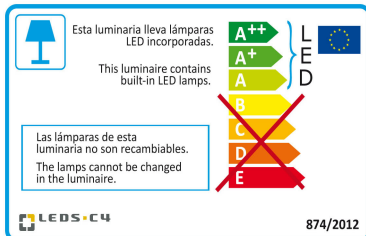

[Click on image to download energy label](#)

### TECHNICAL CHARACTERISTICS

Type:	Table lamp
Adjustable:	Adjustable 360° on the vertical axis.
IP Protection degrees:	IP20
Light source 1:	3 x LED Cree 9W Warm White - 3000K 765 lm <sup>(N)</sup> CRI 80
Total power consumption (W):	9
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	3
Option to extend the guarantee (Years):	5
Units per box:	1
Net Weight (Kg):	4.705
EAN:	8435111093054



### MATERIALS / FINISHES

<b>Structure material:</b>	Polyurethane	<b>Diffuser material:</b>	Methacrylate
<b>Structure finish:</b>	Matt white	<b>Diffuser finish:</b>	Transparent


### GEAR

Multi-voltage electronic gear included (100-240V / 50-60Hz)

<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>		
Code	10-0055-BW-BW	Code	10-0055-BW-BW	Code	10-0055-BW-BW	
Name	Sobremesa SWAY leds 3x3W	Name	Sobremesa SWAY leds 3x3W	Number	1	
Line	Eulumdat	Date	15-03-2013	Position		
Efficiency	100.00%	Coordinate system	CG	Total Flux	248.43 lm	
Maximum value	119.47 cd	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	740 mm	Width	60 mm	Height	20 mm
Rectangular Luminous Area	Length	125 mm	Width	15 mm	Height	0 mm
Horizontal Luminous Area	0.001875 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000454 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	90			
Measurement Distance	0.00	Measurement Flux	248.43 lm			
Operator	Asselum T2	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	10-0055-BW-BW	10-0055-BW-BW - 9.00 W	248.43	9.00	1	
C.I.E.	64 98 100 100 100	D DIN 5040	A50			
F UTE	1.00 C	B NBN	BZ 3 / 0.6 / BZ 2			

740mm x 60mm



**C Halfplanes**


180.0 — 0.0



270.0 — 90.0

ULOR 0.00 %


DLOR 100.00 %

RN 0.00 %

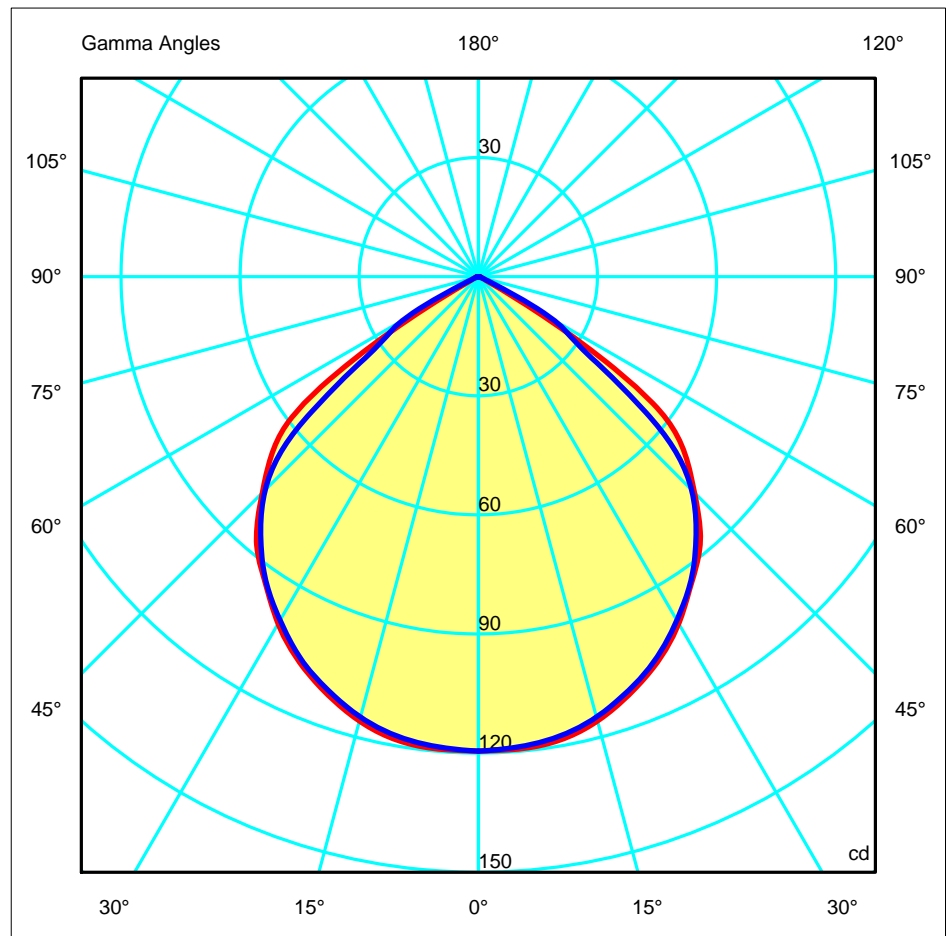


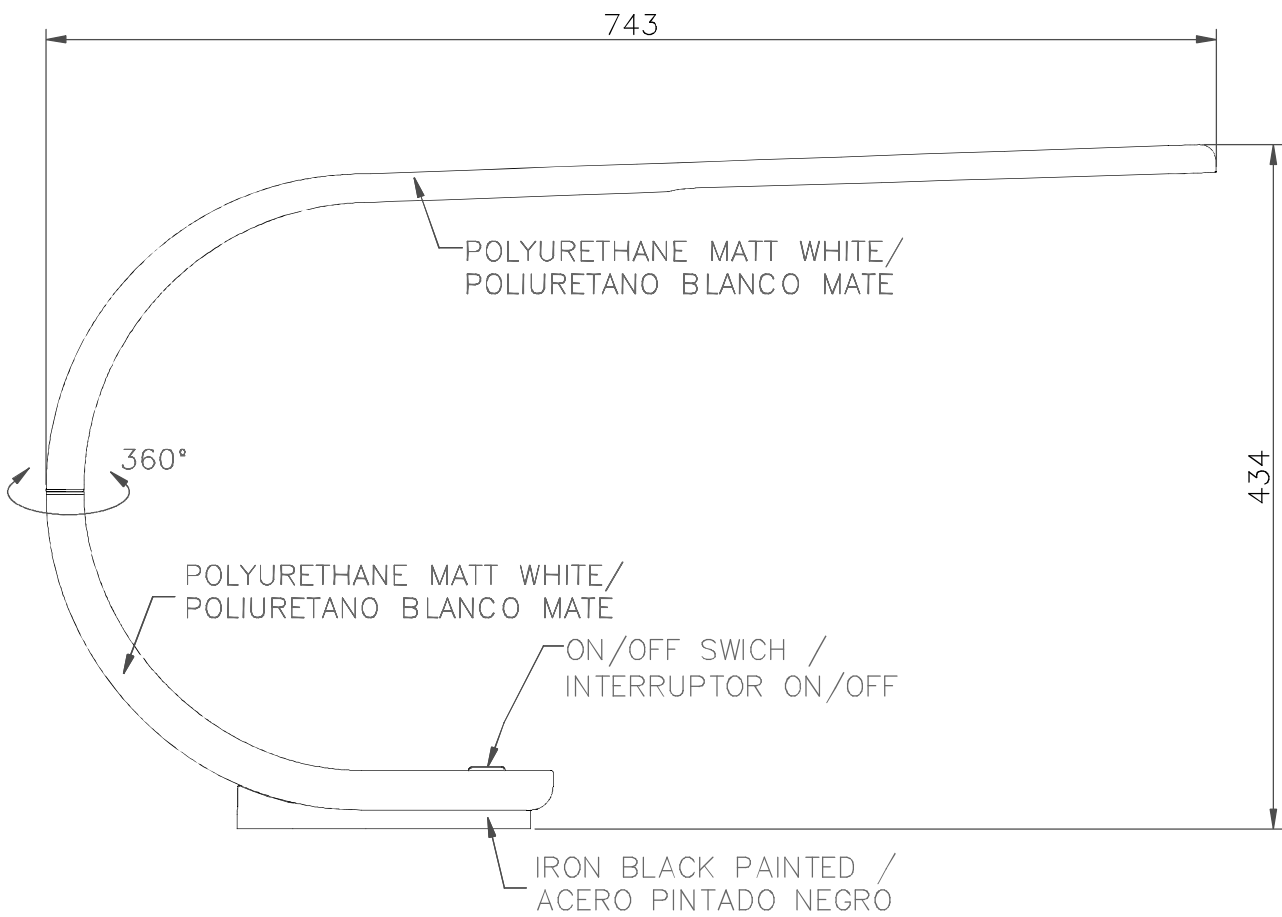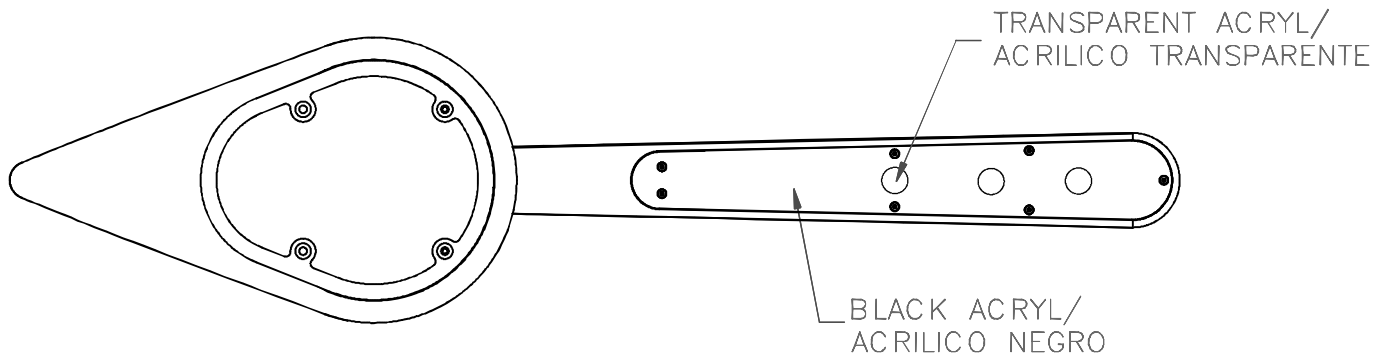

1

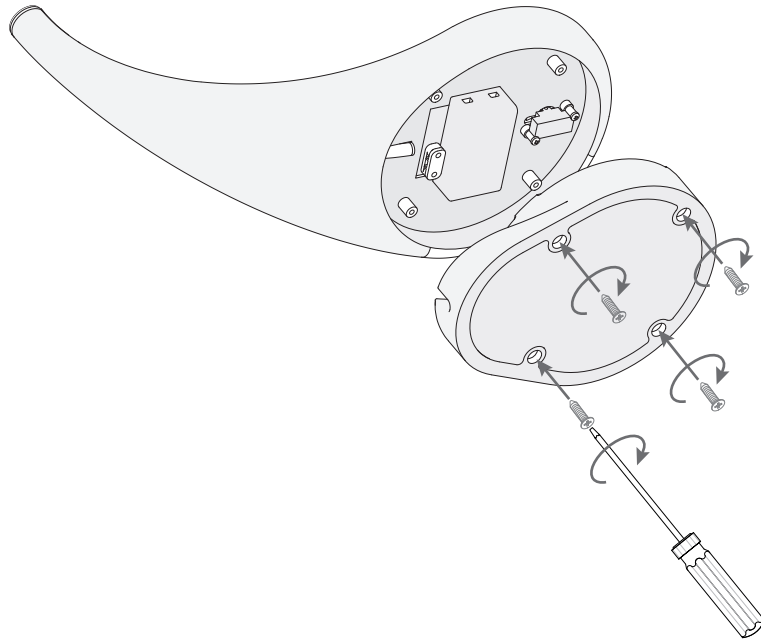

2

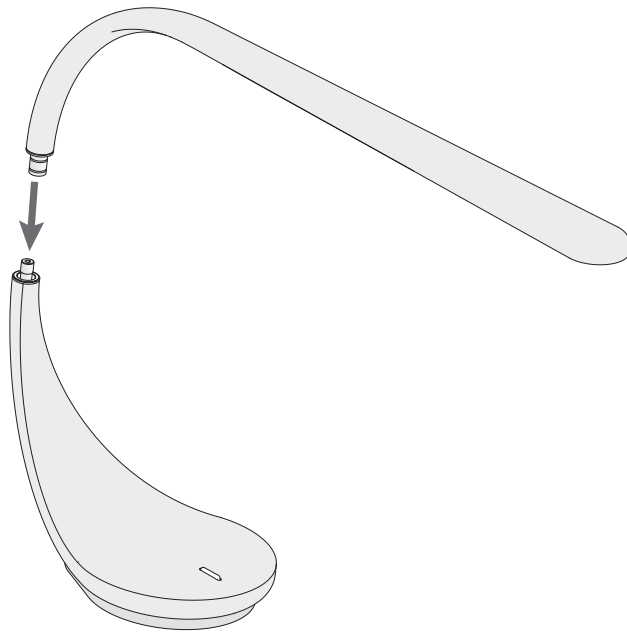

3

