



Benefits

- Stress free ambient light
- Bright & even illumination
- Last 2 times longer than conventional T8 Tube with electromagnetic system

Application



Model	Item Description	W	PF	lm	lm/W	CRI	BA	RoHS	Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
YTT8A3-8W-S	CLSV1 T8 8W G13 3000K 2FT S	8	0.5	900	113	>80	270°	20000	Industrial Packaging	650*215*170	30
YTT8A3-8W-S	CLSV1 T8 8W G13 4000K 2FT S	8	0.5	900	113	>80	270°	20000	Industrial Packaging	650*215*170	30
YTT8A3-8W-S	CLSV1 T8 8W G13 6500K 2FT S	8	0.5	900	113	>80	270°	20000	Industrial Packaging	650*215*170	30
YTT8A3-16W-S	CLSV1 T8 16W G13 3000K 4FT S	16	0.5	1800	113	>80	270°	20000	Industrial Packaging	1250*215*170	30
YTT8A3-16W-S	CLSV1 T8 16W G13 4000K 4FT S	16	0.5	1800	113	>80	270°	20000	Industrial Packaging	1250*215*170	30
YTT8A3-16W-S	CLSV1 T8 16W G13 6500K 4FT S	16	0.5	1800	113	>80	270°	20000	Industrial Packaging	1250*215*170	30

Application Conditions


IP	IP20
Operating Temperature	-20~40°C
Application Temperature	25°C
Storage Environment	-25~50°C

Mechanical Properties

Optical Material	Glass
Housing Material	PC
Finishing Colour	White

Electrical Supply

Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

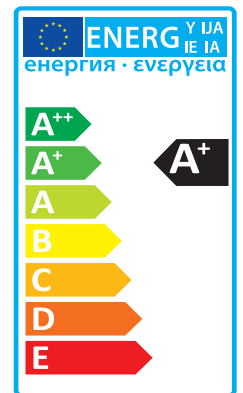

Dimensional Drawing

