




Essential Smartbright TLED Waterproof
WT069C
Product Launch Deck

Essential Smartbright TLED Waterproof: WT069C

Safe & Reliable

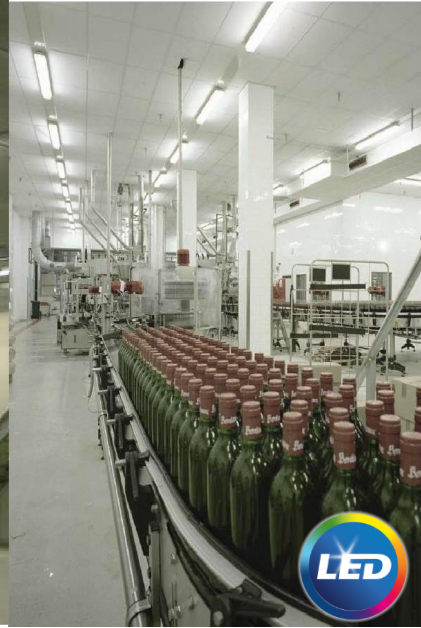

Unique selling point



- **PC Cover and housing material**
- **Stainless Steel Clips**
- **IP65, IK08**
- **Glow wire rating: 850C**
- **-20C - +35C ***

** Depends on TLED*


Essential Smartbright TLED Waterproof: WT069C Spec sheet

	A Brand Bare TLED Waterproof
Safety Class (driver+system)	Class II
Housing material	PC
Cover material (Diffuser)	PC
Clips	Stainless Steel
Cable Gland	M20 (same as Coreline Waterproof)
IPxx	IP65
IKxx	IK08
Ball-proof	follow IEC
Glow wire rating	850C
fire-rated	follow IEC
Mounting	Via SS Brackets
Power connection	Through connector (integrated fuse)
Color(s) (and RAL code)	Light Grey (same as coreline waterproof)
Size (LxWxH) + considerations	Supplier provided
Weight (Kg)	Supplier provided
Packaging concept	1-in-1 + cartonbox
Temperature Range (depending on TLED)	-20C - +35C (housing only).
	(possible to have 10% lower lamp life at 35C for 2x4ft lamps)
Luminaire Service class	B
RoHS/REACH	Yes


Mounting distance

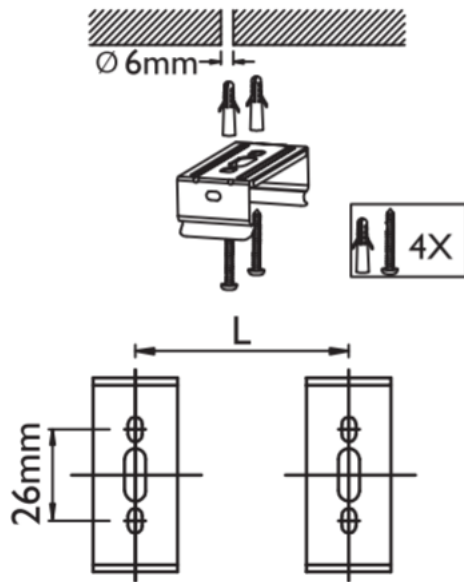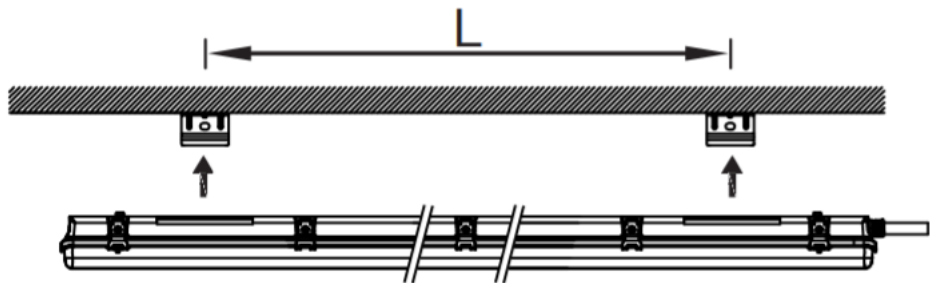

Type	L600	L1200
L	255-405mm	730-950mm

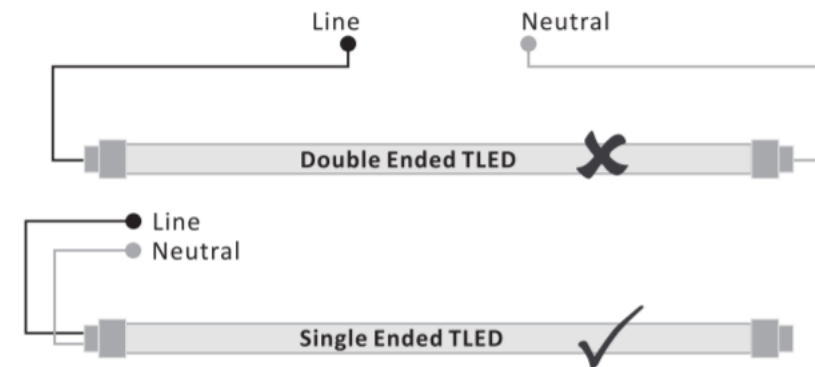

12NC	Description
911401807181	WT069C SE 1XTLED Bare L600 GM
911401807281	WT069C SE 2XTLED Bare L600 GM
911401806981	WT069C SE 1XTLED Bare L1200 GM
911401807081	WT069C SE 2XTLED Bare L1200 GM

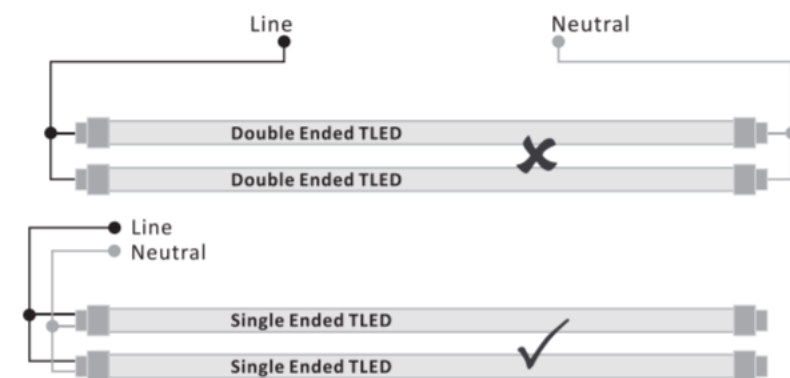

Signify