

Datasheet

LED TWIN 4FT 40W IP65 NON-CORROSIVE 4000K

Stock No: 200-1352



Technical Specifications:

Length	1250mm
Width	110mm
Height	70mm
IP65 Grey Polycarbonate base and opal diffuser. Stainless steel clips. 4000K	Twin row of SMD LED on metal core PCB


Applications

- Garages & workshops
- Food preparations areas
- Warehouses

Features & Benefits:

- Anti-corrosive
- Flicker Free driver
- 40W / 4600lm 114l.lm/c.W
- 5 years warranty

Dimensional line drawings

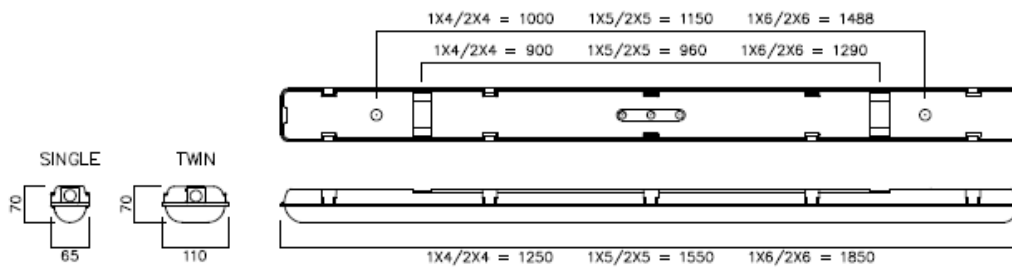

Quality Standards

- EN 55015 Emissions from lighting equipment
- EN 61547 Immunity of general lighting equipment
- EN 61000-3-2 Mains harmonic equipment up to 16A
- EN 61000-3-3 Voltage fluctuations equipment up to 16A
- EN 60598-2-1 Fixed general purpose luminaires
- EN 60598-2-22 Particular requirements for emergency luminaires

General

LUMINAIRE PERFORMANCE

Luminaire Lumens (lm)	4600
Power Consumption (W)	40
Efficacy (l.lm/c.W)	114
Operating Temp. (Min/Max)	-20/25

LIGHT SOURCE

Type	LED
Correlated Colour Temp.	4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation L70:B10	50000
SDCM	<5

ELECTRICAL INPUT

Voltage (V)	220-240V AC
Operating Frequency (Hz)	50
Inrush	<25A
Class	Class 1
Power Factor (PF)	>0.95
Cable Entry	Side /Base

ELECTRICAL OUTPUT

Forward Current (mA)	2 x 300
Forward Voltage (Vf)	56