

Datasheet

LED SINGLE 5FT 35W IP65 NON-CORROSIVE 4000K

Stock No: 200-1353



Technical Specifications:

Length	1550mm
Width	65mm
Height	70mm
IP65 Polycarbonate base and opal diffuser. Stainless steel clips. 4000K	Single row of SMD LED on metal core PCB


Applications

- Garages & workshops
- Food preparations areas
- Warehouses

Features & Benefits:

- Anti-corrosive
- Flicker Free driver
- 35W / 3875lm 110l.lm/c.W
- 5 years warranty

Dimensional line drawings

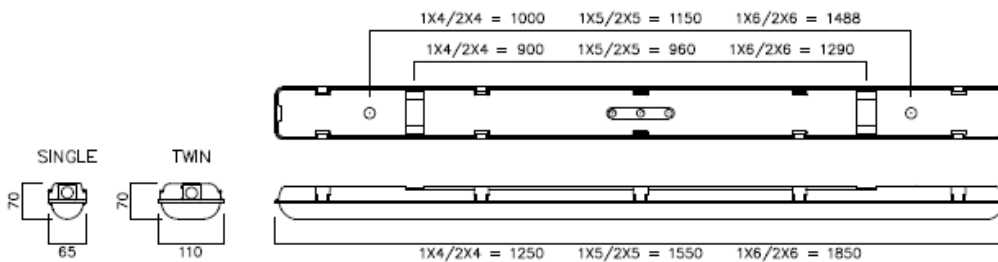

Quality Standards

- EN 55015 Emissions from lighting equipment
- EN 61547 Immunity of general lighting equipment
- EN 61000-3-2 Mains harmonic equipment up to 16A
- EN 61000-3-3 Voltage fluctuations equipment up to 16A
- EN 60598-2-1 Fixed genera- purpose luminaires
- EN 60598-2-22 Particular requirements for emergency luminaires

General

LUMINAIRE PERFORMANCE

Luminaire Lumens (lm)	3875
Power Consumption (W)	35
Efficacy (l.lm/c.W)	110
Operating Temp. (Min/Max)	-20/25

LIGHT SOURCE

Type	LED
Correlated Colour Temp.	4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation L70:B10	50000
SDCM	<5

ELECTRICAL INPUT

Voltage (V)	220-240V AC
Operating Frequency (Hz)	50
Inrush	<25A
Class	Class 1
Power Factor (PF)	>0.95
Cable Entry	Side /Base

ELECTRICAL OUTPUT

Forward Current (mA)	570
Forward Voltage (Vf)	57