

## Datasheet

# LED SINGLE 6FT 46W IP65 NON-CORROSIVE 4000K

Stock No: 200-1355



## Technical Specifications:

Length	1850mm
Width	65mm
Height	70mm
IP65 Polycarbonate base and opal diffuser. Stainless steel clips. 4000K	Single row of SMD LED on metal core PCB


## Applications

- Garages & workshops
- Food preparations areas
- Warehouses

## Features & Benefits:

- Anti-corrosive
- Flicker Free driver
- 46W / 5060lm 110l.lm/c.W
- 5 years warranty

## Dimensional line drawings

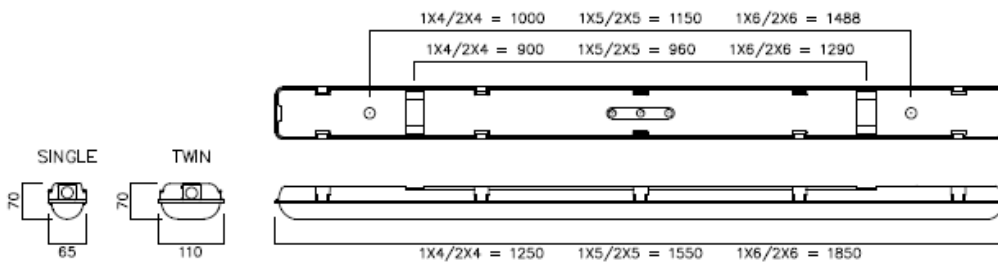

## Quality Standards

- EN 55015 Emissions from lighting equipment
- EN 61547 Immunity of general lighting equipment
- EN 61000-3-2 Mains harmonic equipment up to 16A
- EN 61000-3-3 Voltage fluctuations equipment up to 16A
- EN 60598-2-1 Fixed genera- purpose luminaires
- EN 60598-2-22 Particular requirements for emergency luminaires

## General

### LUMINAIRE PERFORMANCE

Luminaire Lumens (lm)	5060
Power Consumption (W)	46
Efficacy (l.lm/c.W)	110
Operating Temp. (Min/Max)	-20/25

### LIGHT SOURCE

Type	LED
Correlated Colour Temp.	4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation L70:B10	50000
SDCM	<5

### ELECTRICAL INPUT

Voltage (V)	220-240V AC
Operating Frequency (Hz)	50
Inrush	<25A
Class	Class 1
Power Factor (PF)	>0.95
Cable Entry	Side /Base

### ELECTRICAL OUTPUT

Forward Current (mA)	690
Forward Voltage (Vf)	57