


DELTA pushbutton device insert FM, shutter pushbutton 10 A 250 V
Electrically interlocked

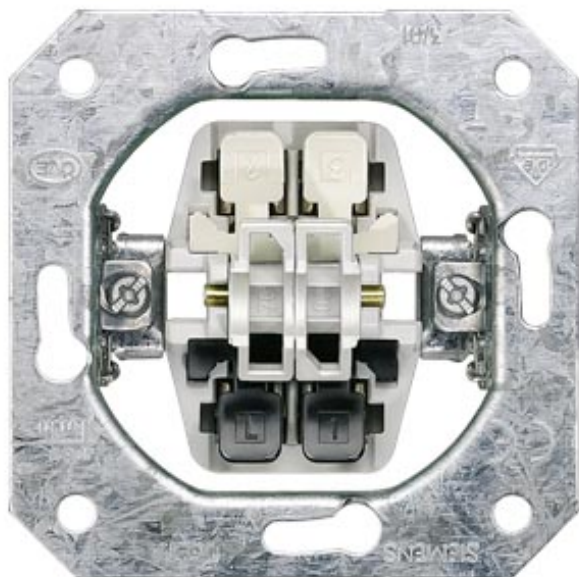

Model	
Product brand name	DELTA
Product designation	Shutter/blind pushbutton
Design of the product	10 A 250 V electrically locked
Design of the surface	others
Type of composition	basic element
Design of the operating mechanism	rocker
General technical data	
Number of poles	2
Type of switch	pushbutton 2-pole
Mounting type	fixing with claw and screw
Material	others
Supply voltage	
Operating voltage / Rated value	250 V
Protection class	
Protection class IP	IP20
Switching capacity	

Switching capacity current	10 A
----------------------------	------

Main circuit

Operating current / rated value	10 A
---------------------------------	------

Appearance

Appearance	not applicable
Color	miscellaneous

Product details

Product feature / interlock	No
Product component / Labeling field	No
Product feature	
• halogen-free	Yes
• transparent	No

Product function

Product function	
• electronic operation	No
• Mechanical operation	Yes

Display and operation

Number of keys	2
----------------	---

Mechanical Design

Height	70 mm
Mounting type	flush mounted
Material / of the enclosure	others

Certificates

Reference code	
• acc. to DIN EN 61346-2	S

General Product Approval	Declaration of Conformity	Test Certificates
---------------------------------	----------------------------------	--------------------------



ÖVE



VDE



EG-Konf.

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TA2114>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TA2114>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TA2114

