


Discharge lamps / OSRAM POWERSTAR®

OSRAM POWERSTAR HQI® T, Tubular, clear

HQI® BT W/D

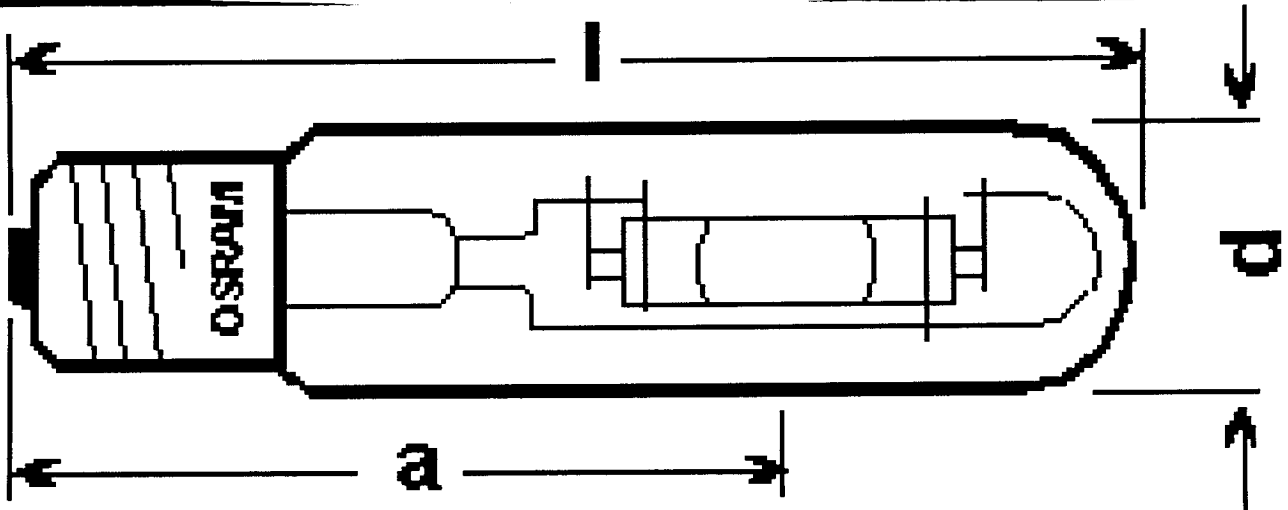

POWERSTAR HQI® "T"

Ignitor required

Abbreviations:

- .../D = Daylight (Colour rendering group 1 A as per DIN 5035)
- .../N = Intermediate (Colour rendering group 2 B as per DIN 5035)
- .../NDL = Intermediate DE LUXE (Colour rendering group 1 B as per DIN 5035)
- .../WDL = Warm White DE LUXE (Colour rendering group 1 B as per DIN 5035)

Reference	HQI® BT W/D
Control gear	HQI®
Rated lamp wattage [W]	420
Luminous flux [lm]	32000
Diameter average value d [mm]	46
Length l max. [mm]	275
Distance a [mm]	175
Base	E 40
Standard pack [pcs]	12
EAN 40 50300	
Operating current [A]	
Power consumption with control gear [W]	
Compensation capacitor for 50 Hz [µF]	
Luminous efficacy of the lamps [lm/W]	
Colour rendering group [-]	
Colour temperature [K]	
Average luminance approx. [cd/cm <sup>2</sup> ]	
Burning position	