

### Benefits

- High quality magnetic mount
- Optimized lens design
- Energy efficient
- Easily replace circular fluorescent lamps with LED
- Uniform light in ceiling lamps, no dark spots

### Application



| Model        | Item Description      | W  | PF  | lm   | lm/W | lm/h  | Single Box Dimensions (LxWxH)mm | Outer Box Dimensions (LxWxH)mm | Packing Qty (PCS/CTN) |
|--------------|-----------------------|----|-----|------|------|-------|---------------------------------|--------------------------------|-----------------------|
| YGA03A61-24W | SIGV1 24W CM230 3000K | 24 | 0.5 | 2400 | 100  | 25000 | 246*246                         | 500*335*260                    | 50                    |
| YGA03A61-24W | SIGV1 24W CM230 4000K | 24 | 0.5 | 2400 | 100  | 25000 | 246*246                         | 500*335*260                    | 50                    |
| YGA03A61-24W | SIGV1 24W CM230 6500K | 24 | 0.5 | 2400 | 100  | 25000 | 246*246                         | 500*335*260                    | 50                    |
| YGA03A61-40W | SIGV1 40W CM230 3000K | 40 | 0.5 | 4000 | 100  | 25000 | 255*255                         | 675*270*270                    | 25                    |
| YGA03A61-40W | SIGV1 40W CM230 4000K | 40 | 0.5 | 4000 | 100  | 25000 | 255*255                         | 675*270*270                    | 25                    |
| YGA03A61-40W | SIGV1 40W CM230 6500K | 40 | 0.5 | 4000 | 100  | 25000 | 255*255                         | 675*270*270                    | 25                    |


| Technical Specifications   |             |
|----------------------------|-------------|
| CRI                        | 80          |
| Colour Consistency (SDCM)  | ≤ 6         |
| Dimmable                   | No          |
| Housing Colour             | Transparent |
| IP                         | IP20        |
| IK                         | IK02        |
| Driver integrated (Yes/No) | Yes         |
| Glow wire test             | 650 C       |
| Driver failure rate        | 1% at 5000h |
| Weight (pc/kg)             | /           |

| Electrical Supply |           |
|-------------------|-----------|
| Frequency (Hz)    | 50/60Hz   |
| Voltage (V)       | 220V-240V |
| AC/DC             | AC        |


| Mechanical Properties |    |
|-----------------------|----|
| Optical Material      | PC |
| Housing Material      | PC |

| Application Conditions  |              |
|-------------------------|--------------|
| Operating Temperature   | -20 C ~ 40 C |
| Application Temperature | 20 C         |
| Storage Environment     | -20 C ~ 40 C |

CE CB

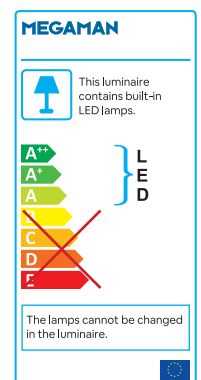

### Dimensional Drawing

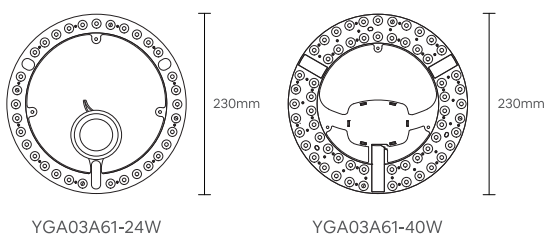

YGA03A61-24W

YGA03A61-40W