



LED Performer 1 T8 Tube


Features

- Wide voltage mains input
- Advanced coating technology
- Flicker free driver
- LED dummy starter
- Long lifespan, install and forget

Benefits

- Use in different regions
- Even, balanced light
- Stress free ambient light
- Prevents overheating toward end of lifespan
- Lasts 2 times longer than conventional T8 tube with electronic system

Application




Specification

Item Code	Product Description	Power (W)	Power Factor	Lumen (lm)	CRI	CCT (K)	Lifetime (hrs)
140056784	LED-P1-T8-600mm-9W-3000K-Glass	9	0.9	1050	80	3000K	40000
140056785	LED-P1-T8-600mm-9W-4000K-Glass	9	0.9	1100	80	4000K	40000
140056786	LED-P1-T8-600mm-9W-6500K-Glass	9	0.9	1100	80	6500K	40000
140056787	LED-P1-T8-1200mm-18W-3000K-Glass	18	0.9	2100	80	3000K	40000
140056788	LED-P1-T8-1200mm-18W-4000K-Glass	18	0.9	2200	80	4000K	40000
140056789	LED-P1-T8-1200mm-18W-6500K-Glass	18	0.9	2200	80	6500K	40000
140065878	LED-P1-T8-1500mm-20W-3000K-Glass	20	0.9	2000	80	3000K	30000
140065879	LED-P1-T8-1500mm-20W-4000K-Glass	20	0.9	2200	80	4000K	30000
140065880	LED-P1-T8-1500mm-20W-6500K-Glass	20	0.9	2200	80	6500K	30000
140066466	LED-P1-T8-1500mm-23W-6500K-Glass	23	0.9	3700	80	6500K	50000


Application Conditions	
IP	20
Operating Temperature	-10-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Mechanical and Finishing Properties	
Optical Material	Glass
Housing Material	Glass
Finishing Colour	White

Electrical supply	
Frequency (Hz)	50/60Hz
Voltage (V)	220V-240V
AC/DC	AC



Dimensional Drawing

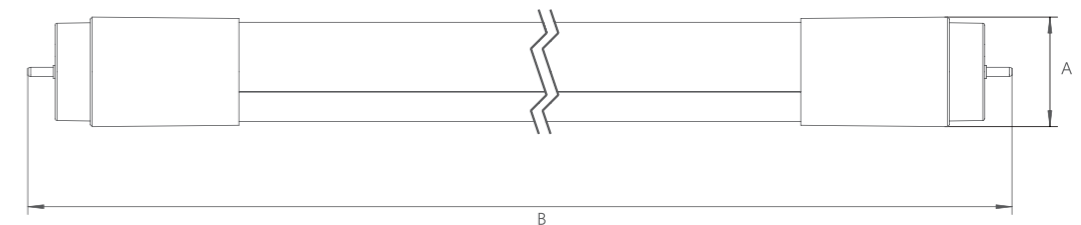

	9W	18W	20/23W
A (mm)	Φ28	Φ28	Φ28
B (mm)	604	1213	1512

Accessory Information



LED-Starters
(Replacement for conventional T8 Batten starter)



LED Utility T8 Empty Batten
(Match with single-ended T8 Tube)