

Electronic LED cord dimmer T29.08

Item-no.: 2900x0800(i) (transparent) | 2920x0800(i) (black) | 2960x0800(i) (white)




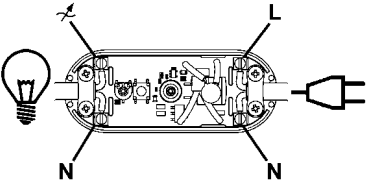


LED multi dimmer for reliable dimming independent from producer and type of LED
Suitable for dimmable filament LEDs, LED lamps, incandescent and HV-halogen lamps
Silent technology – Operates utterly quiet
Opportunities for optimized and flicker-free dimming of LED lamps in the min. and max. area
Electronic overload/short-circuit protection and over-temperature fuse
Soft start and memory function plus (even after zero voltage, e.g. switchable outlet)
Extremely small design
EHMANN advantage – 100 % quality checks, 5 years warranty, German manufacturer
EHMANN service – LED recommendation list can be downloaded via QR-code anytime
EHMANN quality – High-grade manufacturing and reliable function



Electronic LED cord dimmer T29.08

Technical data

<p>3 – 35 W LED rated power</p>	<p>5 – 100 W/VA Rated power</p>	<p>230 V ~ (+/- 10%) / 50 Hz Rated voltage</p>									
<p>Suitable for dimmable filament LEDs, LED lamps, 230V-incandescent and HV-halogen lamps</p>											
<p>Operating principle: leading edge Function: On/off/dim via push button Temperature protection: thermal fuse Overload/short-circuit protection: Electronic Max. cord diameter: 8 mm Cut-off: Electronic ε Cycle of operation: > 25.000 Connection: Screw terminal 0,5 - 1,5 mm² (flexible) Mode of operation: S1 Protection class: 2 Safety class: IP20 Contamination level: 1</p>											
<p>Opportunities for optimized and flicker-free dimming of LED lamps In emergence of flickering-effects during dimming an LED lamp, there is the possibility of adjusting the min. and max. brightness in order to optimize the dimming behaviour.</p> 	<p>LED recommendation Shows which LEDs are compatible with this dimmer. Available via QR code or online at www.ehmann-gmbh.de</p> 	<p>Connection diagram</p> 									
<table border="0"> <tr> <td>Item-no. 2900x0800(i) (transparent)</td> <td>EAN 401209600505 6</td> <td>PU 10</td> </tr> <tr> <td>Item-no. 2920x0800(i) (black)</td> <td>EAN 401209600503 2</td> <td>PU 10</td> </tr> <tr> <td>Item-no. 2960x0800(i) (white)</td> <td>EAN 401209600504 9</td> <td>PU 10</td> </tr> </table>		Item-no. 2900x0800(i) (transparent)	EAN 401209600505 6	PU 10	Item-no. 2920x0800(i) (black)	EAN 401209600503 2	PU 10	Item-no. 2960x0800(i) (white)	EAN 401209600504 9	PU 10	<p>81 x 32 x 23 mm Dimensions (L x W x H)</p>
Item-no. 2900x0800(i) (transparent)	EAN 401209600505 6	PU 10									
Item-no. 2920x0800(i) (black)	EAN 401209600503 2	PU 10									
Item-no. 2960x0800(i) (white)	EAN 401209600504 9	PU 10									