

## PRODUCT DATASHEET

### QT-ECO 1X4...16 S

QUICKTRONIC ECONOMIC | ECG for FL 7 mm and CFL



#### AREAS OF APPLICATION

- Public buildings

#### PRODUCT FAMILY BENEFITS

- Compact housing
- Automatic restart after lamp replacement
- Large input voltage range

#### PRODUCT FAMILY FEATURES

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 50 Hz
- Energy Efficiency Index EEI: A2 / A3 (depending on lamp)
- Automatic shutdown of defective lamps and at end of life (EoL)

**TECHNICAL DATA**

Electrical data


Nominal voltage	220...240 V
Mains frequency	50 Hz
Input voltage DC	176...254 V
Operating frequency	35...45 kHz <sup>1)</sup>
Max. ECG no. on circuit breaker 10 A (B)	68
Max. ECG no. on circuit breaker 16 A (B)	112
Inrush current	10 A

<sup>1)</sup> Approximately

Light technical data

Starting time	1.0 s
---------------	-------

Dimensions & weight



Length	80.0 mm
Width	40.0 mm
Height	22.0 mm
Mounting hole spacing, length	72.0...75.0 mm
Product weight	50.00 g

Temperatures & operating conditions

Ambient temperature range	-15...+50 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

<sup>1)</sup> Maximum 56 days/year at 85 %

Lifespan

ECG lifetime	30000 h <sup>1)</sup>
--------------	-----------------------

<sup>1)</sup> T<sub>c</sub> = 70°C, with max. 10% failure rate

Capabilities


Suitable for fixtures with prot. class	I / II
End of lamp life safety shutdown	EOL T.2

Certificates & standards

Approval marks – approval	VDE
EEI – Energy Label	A2/A3 <sup>1)</sup>
Standards	Acc. to EN 61347-2-3/Acc. to EN 55015:2006 + A1:2007/Acc. to EN 61000-3-2/Acc. to EN 61547
Protection class	I
Type of protection	IP20




<sup>1)</sup> For detailed information please see Lamp-ECG combinations

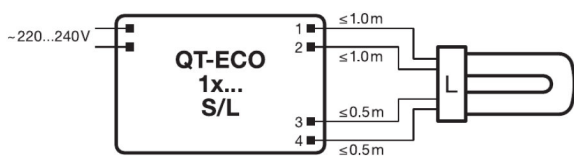







Wiring Diagram



Wiring diagram

DOWNLOAD DATA

File	
	Addon Technical Information 58010_ADDON TECHNICAL INFORMATION QT-ECO 1x... L S (G+GB)
	Certificates 334955_VDE-Marks approval
	Certificates 334983_VDE-Marks approval

	Certificates 335154_Manufacturer's declaration &#150; EN 55015:2006+A1:2007 (300 MHz)
	Certificates 683440_VDE-Marks approvals
	Declarations of conformity 339525_Declaration of Conformity (GB)
	Operating instructions 592501_EAC QT-ECO
	CAD data 3-dim 313443_80x40x22 9900019
	CAD data 3-dim 313452_80x40x22 9900019
	CAD data 3-dim 313497_80x40x22 9900019
	CAD data PDF 313386_80x40x22 9900019

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300638584	Unpacked 1	- x - x -	51.00 g	
4050300655260	Shipping carton box 50	212 mm x 142 mm x 170 mm	2791.00 g	5.12 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

QUICKTRONIC ECONOMIC | ECG for FL 7 mm and CFL

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Luminous flux at 25 °C	Number of lighting outlets	EEI – Energy Label	Luminous flux at 35 °C
QT-ECO 1X4...16 S	DULUX D/E 10 W	0.08 A	11.50 W	600 lm	1	A3	
	DULUX D/E 13 W	0.10 A	14.00 W	850 lm	1	A2	
	DULUX S/E 11 W	0.09 A	13.00 W	900 lm	1	A3	
	DULUX S/E 7 W	0.06 A	9.00 W	400 lm	1	A3	
	DULUX S/E 9 W	0.07 A	10.00 W	600 lm	1	A3	
	DULUX T/E 13 W	0.10 A	14.00 W	800 lm	1	A2	
	HE 14 W	0.10 A	15.00 W		1	A2	1150 lm
	L 10 W	0.10 A	12.00 W		1		650 lm
	L 13 W BASIC	0.08 A	15.00 W		1		950 lm
	L 16 W	0.11 A	16.00 W		1		1100 lm
	L 4 W BASIC	0.05 A	6.50 W		1		120 lm
	L 6 W BASIC	0.06 A	8.50 W		1		270 lm
	L 8 W BASIC	0.07 A	10.50 W		1		450 lm