

# PRODUCT DATASHEET

## ST5HE-UN 7 W/4000K 549.0 mm

SubstiTUBE T5 HE UN | LED tubes for electronic high frequency control gears and AC mains



---

### AREAS OF APPLICATION

- Supermarkets and department stores
- Industry
- Public buildings, reception areas, offices, corridors, etc.
- General illumination within ambient temperatures from –20...+50 °C

---

### PRODUCT BENEFITS

- No bending thanks to glass technology
- Also suitable for operation at low temperatures
- High luminous flux for sophisticated lighting tasks

---

### PRODUCT FEATURES

- Tube made of glass
- Type of protection: IP20
- Lifetime: up to 60,000 h
- Compatible with many common electronic control gears (see also compatibility list) and line voltage
- High color consistency:  $\leq 5$  SDCM



## TECHNICAL DATA

### Electrical data

Rated wattage	7.00 W
Nominal voltage	220...240 V
Operating frequency	50...60 Hz <sup>1)</sup>
Nominal wattage	7.00 W
Nominal current	0.036 A <sup>2)</sup>
Type of current	AC
Max. lamp no. on circuit break. 10 A (B)	153
Max. lamp no. on circuit break. 16 A (B)	246
Total harmonic distortion	< 20 %
Power factor $\lambda$	> 0.90

<sup>1)</sup> 40-95KHz for ECG (HF)

<sup>2)</sup> 150-320 mA for ECG (HF)


### Photometrical data

Rated color temperature	4000 K
Nominal luminous flux	1000 lm
Rated luminous flux	1000 lm
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Cool White
Color temperature	4000 K
Luminous flux	1000 lm
Color rendering index Ra	83
Standard deviation of color matching	≤5 sdcn

### Light technical data

Starting time	< 0.5 s
Warm-up time (60 %)	< 0.50 s
Rated beam angle (half peak value)	160.00 °

## Dimensions & weight



<b>Length with base excl. base pins/connection</b>	549.00 mm
<b>Tube diameter</b>	16 mm
<b>Base diameter</b>	17.0 mm
<b>Product weight</b>	75.00 g
<b>Overall length</b>	549.0 mm

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+50 °C
<b>Maximum temperature at tc test point</b>	75 °C

## Lifespan

<b>Lifespan</b>	60000 h
<b>Nominal lamp life time</b>	60000 h
<b>Rated lamp life time</b>	60000 h
<b>Number of switching cycles</b>	200000

## Additional product data

<b>Base (standard designation)</b>	G5
<b>Mercury-free</b>	Yes

## Capabilities

<b>Dimmable</b>	No
-----------------	----

## Certificates & standards

<b>Type of protection</b>	IP20
<b>Standards</b>	CE
<b>Energy efficiency class</b>	A++
<b>Energy consumption</b>	7 kWh/1000h


Country-specific categorizations

Order reference	ST5HE14-0.6M 7W
-----------------	-----------------

Logistical data

Temperature range at storage	-20...+80 °C
------------------------------	--------------

Light Distribution

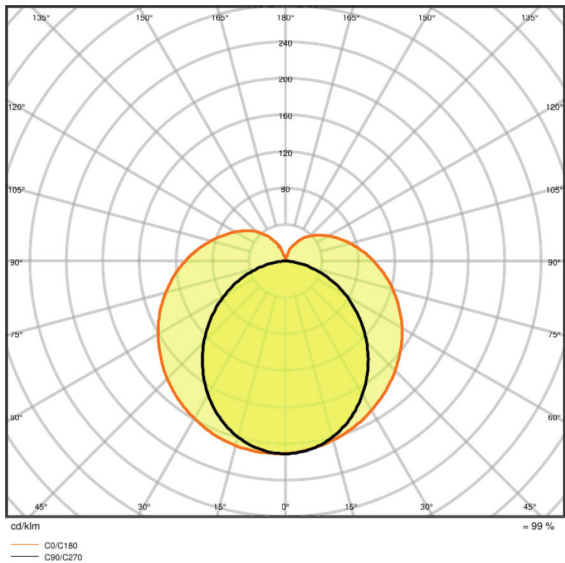

LDC typ polar

SAFETY ADVICE

Not suitable for operation with conventional control gear  
Operation in outdoor applications in suitable damp-proof luminaires possible according to data sheet and installation instruction.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075138223	Sleeves 1	565 mm x 20 mm x 25 mm	90.00 g	0.28 dm <sup>3</sup>
4058075138230	Shipping carton box 10	595 mm x 157 mm x 89 mm	1200.00 g	8.31 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

## REFERENCES / LINKS

For current information see

▶ [www.ledvance.com/substitute](http://www.ledvance.com/substitute)

---

## LEGAL ADVICE

When used to replace a T5 fluorescent lamp, the total energy efficiency and light distribution depends on the design of the lighting system.

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.