

Lynx-S

SA LYNX-S 9W/840 G23 SLV 10 P

0025890



Range features

- Single pin-base compact lamps, suitable for wide range of applications
- Excellent colour rendering - (CRI=85)
- For use with magnetic ballast
- Available in Homelight (2700K), Warm White (3000K) and Cool white (4000K)
- Average rated life: 10000 hours



PRODUCT OVERVIEW

Ordering number	0025890
Technology	Compact Fluorescent
Light colour	840 Cool White
Energy class	A
Average life (Rated) (h)	10000
Lamp shape	Stick
Lamp finish	frosted
Dimmable	NO
Cap/Base	G23
Type	Lynx S
EAN code	5410288258904
CRI (Ra)	80
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	600
Efficacy (Rated) (lm/w)	67
Watt (Nominal) (W)	9
Voltage (V)	60

Lynx-S

SA LYNX-S 9W/840 G23 SLV 10 P

0025890

DATA TABLE

General data

Technology	Compact Fluorescent
Dry applications use only	yes
Ordering number	0025890
Average life (Rated) (h)	10000
Average life (Nominal) (h)	10000
Energy class	A
Lamp finish	frosted
Lamp shape	Stick
Dimmable	NO
Cap/Base	G23
Type	Lynx S
EAN code	5410288258904
E-number FI	4944089
E-number SE	8357262
Long description	Single pin-base compact lamps, suitable for wide range of applications. Excellent colour rendering - (CRI=85). For use with magnetic ballast. Available in Homelight (2700K), Warm White (3000K) and Cool white (4000K). Average rated life: 10000 hours
Product name	SA LYNX-S 9W/840 G23 SLV 10 P
Lamp mercury content (mg)	< 2.50 mg
Starting time (max) (s)	10 Sec
Control gear required	Yes
IEC Reference	IEC 60901
IEC Reference 2	IEC 61199
IEC Reference 3	IEC 60921
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Rated survival factor at 2000 h 50Hz	0.98
Rated survival factor at 4000 h 50Hz	0.9
Rated survival factor at 6000 h 50Hz	0.7
Rated survival factor at 8000 h 50Hz	0.50
Rated survival factor at 12000 h 50Hz	0.62

Lynx-S

SA LYNX-S 9W/840 G23 SLV 10 P

0025890

Optical data

Light colour	840 Cool White
CRI (Ra)	80
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	600
Luminous flux (Nominal) (lm)	600
Ambient temperature for maximum luminous flux (°C)	25
Rated lumen maint. factor at 2000 h 50Hz	0.85
Rated lumen maint. factor at 4000 h 50Hz	0.78
Rated lumen maint. factor at 6000 h 50Hz	0.76
Rated lumen maint. factor at 8000 h 50Hz	0.75
Rated lumen maint. factor at 12000 h 50Hz	0.8

Electrical data

kWh per 1000 hours burning time	11
Efficacy (Rated) (lm/w)	67
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	67
Watt (Rated) (W)	8.7
Watt (Nominal) (W)	9
Voltage (V)	60
Ignition voltage (V)	177
Current (A)	0.17

Physical data


Weight (kg)	0.03
Length base to base (mm) - A	168
Lamp Length (mm) - C/L	145
Max. Lamp Diameter (mm) - D	32.5
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	2.20 x 3.80 x 15.90
Inner package dimensions (L x W x H) (cm)	12.20 x 8.80 x 18.00
Inner package net weight (kg)	0.26
Outer package dimensions (L x W x H) (cm)	45.50 x 26.10 x 19.50

Lynx-S

SA LYNX-S 9W/840 G23 SLV 10 P

0025890

TECHNICAL DRAWINGS

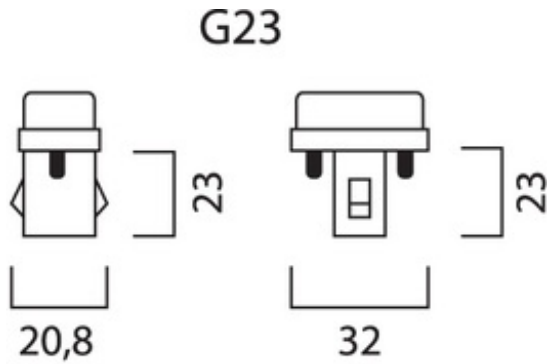

ENERGY LABEL

