

## Lynx-D

SA LYNX-D 26W/840 G24D-3 SLV

0025915



### Range features

- Compact and high performance double bend pin base lamp
- Suitable for operation on conventional control gear
- Excellent luminous flux
- Excellent colour rendering (CRI=85)
- Available in Homelight (2700K), Warm White (3000K), White (3500K) Cool White (4000K) and Daylight (6500K)
- Average rated life: 12000 hours



### PRODUCT OVERVIEW

Ordering number	0025915
Technology	Compact Fluorescent
Light colour	840 Cool White
Energy class	A
Average life (Rated) (h)	12000
Lamp shape	Stick
Lamp finish	frosted
Dimmable	NO
Cap/Base	G24d-3
Type	Lynx D
EAN code	5410288259154
CRI (Ra)	80
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	1800
Efficacy (Rated) (lm/w)	66
Watt (Nominal) (W)	26
Voltage (V)	105

Lynx-D

*SA LYNX-D 26W/840 G24D-3 SLV*

**0025915**

**DATA TABLE**

---

## Lynx-D

SA LYNX-D 26W/840 G24D-3 SLV

0025915

### General data

Ordering number	0025915
Dry applications use only	yes
Technology	Compact Fluorescent
Energy class	A
Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000
Lamp finish	frosted
Lamp shape	Stick
Dimmable	NO
Cap/Base	G24d-3
Type	Lynx D
EAN code	5410288259154
E-number FI	4944114
E-number SE	8357368
Long description	Compact and high performance double bend pin base lamp. Suitable for operation on conventional control gear. Excellent luminous flux. Excellent colour rendering (CRI=85). Available in Homelight (2700K), Warm White (3000K), White (3500K) Cool White (4000K) and Daylight (6500K). Average rated life: 12000 hours
Product name	SA LYNX-D 26W/840 G24D-3 SLV
Lamp mercury content (mg)	< 2.50 mg
Starting time (max) (s)	10 Sec
Control gear required	Yes
IEC Reference	IEC 60901
IEC Reference 2	IEC 61199
IEC Reference 3	IEC 60921
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Rated survival factor at 2000 h 50Hz	0.98
Rated survival factor at 2000 h High Frequency	1
Rated survival factor at 4000 h 50Hz	0.9
Rated survival factor at 4000 h High Frequency	1
Rated survival factor at 6000 h 50Hz	0.7
Rated survival factor at 6000 h High Frequency	1
Rated survival factor at 8000 h 50Hz	0.50
Rated survival factor at 8000 h High Frequency	0.99
Rated survival factor at 12000 h 50Hz	0.5
Rated survival factor at 12000 h High Frequency	0.9
Rated survival factor at 16000 h 50Hz	0.71
Rated survival factor at 16000 h High	0.71

## Lynx-D

SA LYNX-D 26W/840 G24D-3 SLV

0025915

### Frequency

### Optical data

Light colour	840 Cool White
CRI (Ra)	80
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	1800
Luminous flux (Nominal) (lm)	1800
Ambient temperature for maximum luminous flux (°C)	25
Rated lumen maint. factor at 2000 h 50Hz	0.85
Rated lumen maint. factor at 4000 h 50Hz	0.78
Rated lumen maint. factor at 6000 h 50Hz	0.76
Rated lumen maint. factor at 8000 h 50Hz	0.75
Rated lumen maint. factor at 12000 h 50Hz	0.7
Rated lumen maint. factor at 2000 h High Frequency	0.9
Rated lumen maint. factor at 4000 h High Frequency	0.86
Rated lumen maint. factor at 6000 h High Frequency	0.82
Rated lumen maint. factor at 8000 h High Frequency	0.79
Rated lumen maint. factor at 12000 h High Frequency	0.75

### Electrical data

kWh per 1000 hours burning time	31
Efficacy (Rated) (lm/w)	66
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	66
Watt (Rated) (W)	26
Watt (Nominal) (W)	26
Voltage (V)	105
Ignition voltage (V)	191
Current (A)	0.420

Lynx-D

*SA LYNX-D 26W/840 G24D-3 SLV*

**0025915**


---

## Lynx-D

SA LYNX-D 26W/840 G24D-3 SLV

0025915

### TECHNICAL DRAWINGS

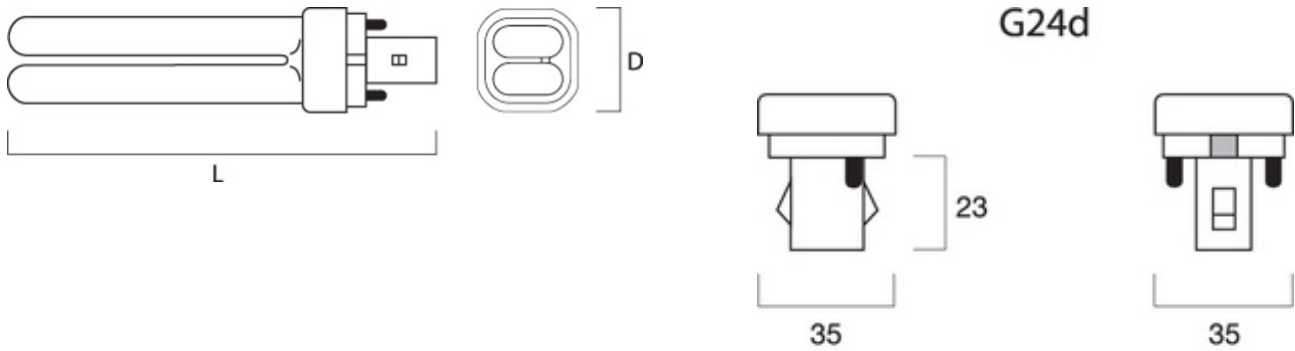

### ENERGY LABEL

