


## Start Waterproof LED G3 Emergency

START Waterproof Twin 1500 IP65 EM 7100lm 840  
0067962



### Product features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, 7050lm, 60 W, 118 lm/W, 4000 K, drive current 700 mA, non dimmable, 3 hours emergency, CRI 80, IP65, IK08, Class I, nominal average life (h): 50000, 1578mm x 110mm x 78mm, energy class: A++ A+ A, D-mark

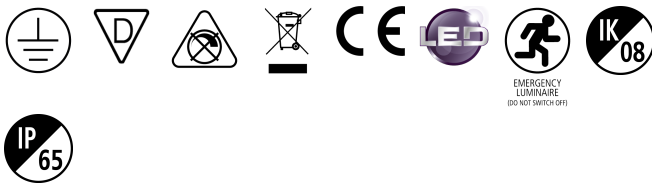

### PRODUCT OVERVIEW

IPC Code	0067962
Product name	START Waterproof Twin 1500 IP65 EM 7100lm 840
Technology	LED
Housing	PC Polycarbonate
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC002892
E-number FI	4309055
Fixture luminous flux (lm)	7050
Luminaire efficacy (lm/W)	118
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	60
Electrical protection	Class I
Dimmable	No
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679624
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	0067962
Product name	START Waterproof Twin 1500 IP65 EM 7100lm 840

## Start Waterproof LED G3 Emergency

*START Waterproof Twin 1500 IP65 EM 7100lm 840*  
0067962

Technology	LED
Housing	PC Polycarbonate
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C - 30°C
Certifications	EUNEW002
ETIM Class	EC002892
E-number FI	4309055

### Optical data

Fixture luminous flux (lm)	7050
Luminaire efficacy (lm/W)	118
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Distribution type	Direct
Photobiological Risk Group	RG0
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	60
Mains voltage (V)	220-240V~
Lamp power factor	0.91
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Dimmable	No
Drive current (mA)	700
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	25
Max. Luminaires per 13A C Breaker	35
Max. Luminaires per 16A C Breaker	40
Max. Luminaires per 20A C Breaker	50
Max. Luminaires per 10A B Breaker	25
Max. Luminaires per 13A B Breaker	30
Max. Luminaires per 16A B Breaker	40
Max. Luminaires per 20A B Breaker	50

### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	59000
Lumen maintenance - L90 B20	53000
Lumen maintenance - L90 B10	50000
Average life (Nominal) (h)	50000

## Start Waterproof LED G3 Emergency *START Waterproof Twin 1500 IP65 EM 7100lm 840* 0067962

### Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.62



### Packaging

Single packaging type	Carton
Product EAN number	5410288679624
Packaging single length / height (cm)	167.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288679624
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

### Safety data

Dry applications use only	No
---------------------------	----

## PHOTOMETRY

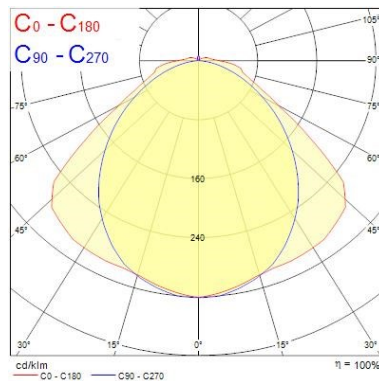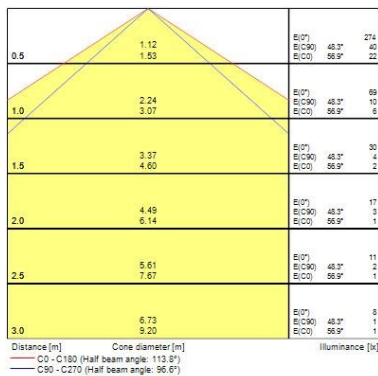


## Start Waterproof LED G3 Emergency START Waterproof Twin 1500 IP65 EM 7100lm 840 0067962


Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.14 1.55	E(0°) 9086 E(C90) 1289 E(C0) 722
1.0	2.28 3.10	E(0°) 2266 E(C90) 485 E(C0) 180
1.5	3.43 4.66	E(0°) 1027 E(C90) 144 E(C0) 80
2.0	4.57 6.21	E(0°) 567 E(C90) 81 E(C0) 45
2.5	5.71 7.76	E(0°) 363 E(C90) 52 E(C0) 29
3.0	6.85 9.31	E(0°) 252 E(C90) 36 E(C0) 20

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 114.4°)  
— C90 - C270 (Half beam angle: 97.6°)

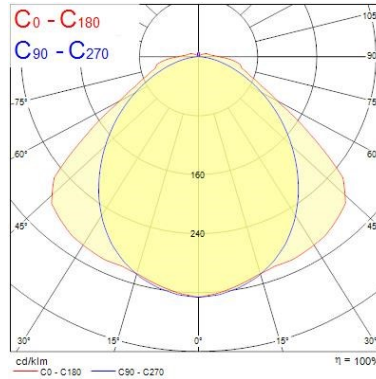

### TECHNICAL DRAWINGS



**SYLVANIA** 0067962


This luminaire contains built-in LED lamps

LED

The lamps cannot be changed in the luminaire.


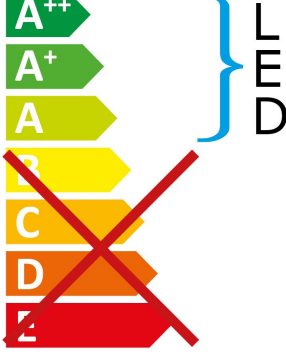
874/2012

## Start Waterproof LED G3 Emergency *START Waterproof Twin 1500 IP65 EM 7100lm 840* 0067962



This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.



**SYLVANIA** 0067962 874/2012