



Ledinaire Waterproof WT065C

WT065C LED24S/840 PSU L1200

840 neutral white - Power supply unit

The Ledinaire Waterproof range provides maximum performance and durability at great value. As an off-the-shelf LED luminaire solution for all your everyday needs, it can be deployed in a wide variety of locations.

Product data

General Information			
Beam angle of light source	110 °	Constant light output	No
Light source color	840 neutral white	Number of products on MCB of 16 A type B	24
Light source replaceable	No	EU RoHS compliant	Yes
Number of gear units	1 unit	Service tag	No
Driver/power unit/transformer	Power supply unit	Unified glare rating CEN	Not applicable
Driver included	Yes		
Optic type	Symmetrical	Operating and Electrical	
Luminaire light beam spread	110°	Input Voltage	220 to 240 V
Control interface	-	Input Frequency	50 or 60 Hz
Connection	Connection unit 3-pole	Initial CLO power consumption	- W
Cable	-	Average CLO power consumption	- W
Protection class IEC	Safety class I	Inrush current	3.58 A
Glow-wire test	Temperature 850 °C, duration 30 s	Inrush time	0.04 ms
Flammability mark	For mounting on normally flammable surfaces	Power Factor (Min)	0.9
CE mark	CE mark		
ENEC mark	-	Controls and Dimming	
Warranty period	3 years	Dimmable	No

Ledinaire Waterproof WT065C

Mechanical and Housing	
Housing Material	Polycarbonate
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Stainless steel
Optical cover/lens finish	Opal
Overall length	1215 mm
Overall width	80 mm
Overall height	76 mm
Color	Gray and white
Dimensions (Height x Width x Depth)	76 x 80 x 1215 mm (3 x 3.1 x 47.8 in)

Approval and Application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]


Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	2400 lm
Luminous flux tolerance	-10%,+15%
Initial LED luminaire efficacy	120 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial chromaticity	<5
Initial input power	20 W

Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life	0.075 %
50000 h	
Lumen maintenance at median useful life*	L65
50000 h	
Application Conditions	
Ambient temperature range	-20 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Yes

Product Data	
Full product code	871016336951899
Order product name	WT065C LED24S/840 PSU L1200
EAN/UPC - Product	8710163369518
Order code	911401825281
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	9
Material Nr. (12NC)	911401825281
Net Weight (Piece)	1.330 kg



Dimensional drawing

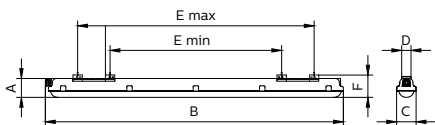

Type	Dimensions (mm)						No. of clips
	A	B	C	D	E min	E max	
WT065C-LED24S/840 PSU L600		450			104	104	5
WT065C-LED24S/840 PSU L1200		1215	80	38	138	138	10
WT065C-LED24S/840 PSU L1800	1%				838	1382	15

Waterproof WT055C/WT060C

Ledinaire Waterproof WT065C

