



Essential LED tubes T5 Mains

CorePro LEDtube 1200mm 16W830 G5 I MX

The Essential LEDtube T5 is an affordable LED solution suitable for replacing T5 fluorescent lamps. Thanks to a unique design, Philips Essential LED tube T5 Mains can be directly installed in luminaires operating on mains power connection. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Product data

General Information		Lamp Current (Max)	
Cap-Base	G5 [G5]	Lamp Current (Min)	175 mA
EU RoHS compliant	Yes	Starting Time (Nom)	70 mA
Nominal Lifetime (Nom)	30000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	Power Factor (Nom)	0.92
Voltage (Nom)		100-240 V	
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	200 °	T-Ambient (Min)	-20 °C
Luminous Flux (Nom)	2000 lm	T-Storage (Max)	65 °C
Color Designation	White (WH)	T-Storage (Min)	-40 °C
Correlated Color Temperature (Nom)	3000 K	T-Case Maximum (Nom)	70 °C
Luminous Efficacy (rated) (Nom)	115.00 lm/W	Controls and Dimming	
Color Consistency	<6	Dimmable	No
Color Rendering Index (Nom)	80	Mechanical and Housing	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Product Length	1200 mm
Operating and Electrical			
Input Frequency	50 to 60 Hz		
Power (Nom)	16 W		

Essential LED tubes T5 Mains

Approval and Application


Energy Efficiency Label (EEL)	A+
Energy Saving Product	Yes
Approval Marks	CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	- kWh

Product Data

Full product code	871869673416200
-------------------	-----------------

Order product name	CorePro LEDtube 1200mm 16W830 G5 I MX
EAN/UPC - Product	8718696734162
Order code	929001380912
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	929001380912
Net Weight (Piece)	0.160 kg



Dimensional drawing

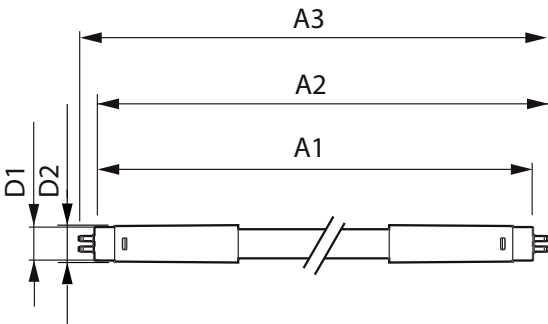

TLED 1200mm 100-240V 16-28W 3000K

Product	D1	D2	A1	A2	A3
CorePro LEDtube 1200mm 16W830 G5 I MX	15.8 mm	19 mm	1149 mm	1156.1 mm	1163.2 mm

Photometric data

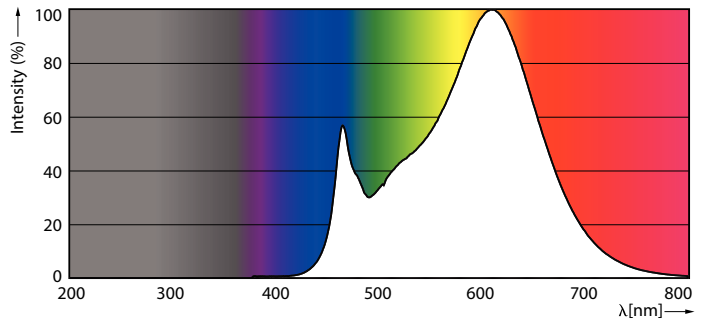


ESSENTIAL LEDtube 16W G5 830 APR

ESSENTIAL LEDtube 16W G5 830 APR


Essential LED tubes T5 Mains

Photometric data




ESSENTIAL LEDtube 16W G5 830 APR


Lifetime

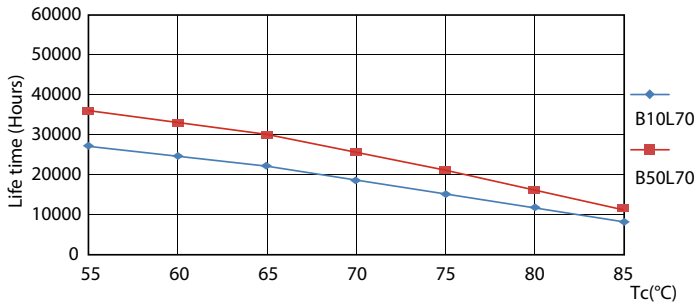


ESSENTIAL LEDtube 8-16W G5 830-865 APR

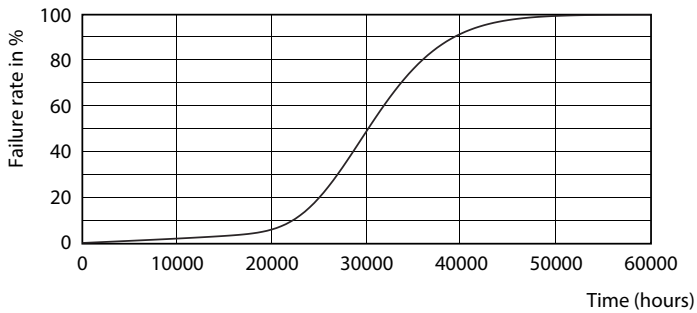

ESSENTIAL LEDtube 8-16W G5 830-865 APR

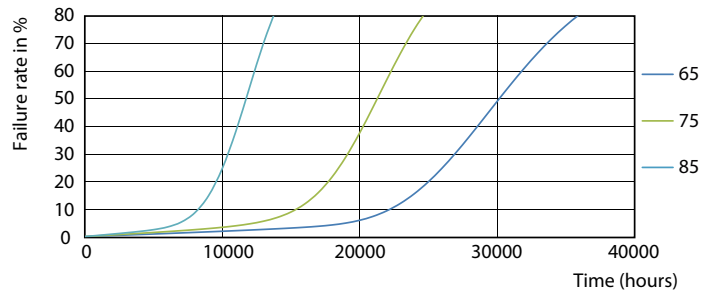


ESSENTIAL LEDtube 8-16W G5 830-865 APR

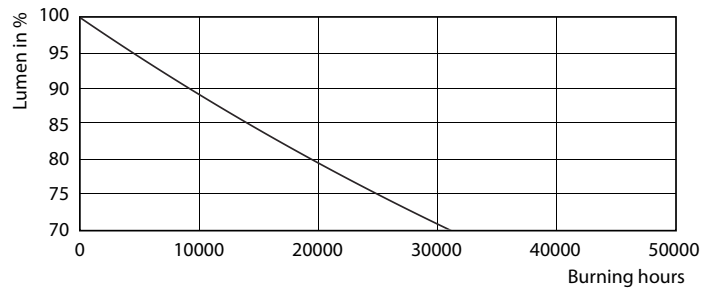

ESSENTIAL LEDtube 8-16W G5 830-865 APR

Essential LED tubes T5 Mains

Lifetime

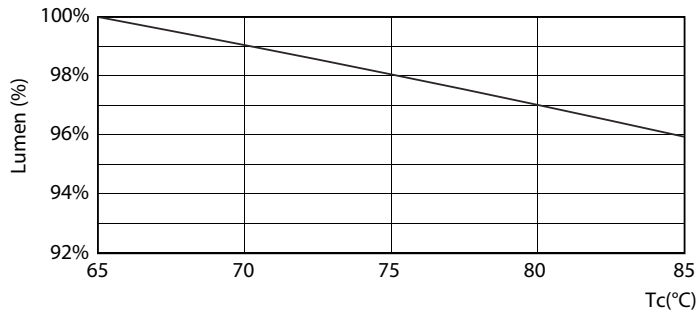

ESSENTIAL LEDtube 16W G5 830-865 APR

