



# TL Rapid Start Standard Colours

## TL RS 40W/54-765 1SL/25

The TL RS (Rapid Start) lamp (tube diameter 38 mm) has an external silicon coating. It is suitable for situations where high humidity requires fast and stable ignition but color rendering is not important. Rapid Start lamps can be ignited without a starter.

### Product data

| General Information                |                                  |
|------------------------------------|----------------------------------|
| Cap-Base                           | G13 [ Medium Bi-Pin Fluorescent] |
| Life to 50% Failures (Nom)         | 13000 h                          |
| System Description                 | Rapid Start                      |
| Light Technical                    |                                  |
| Color Code                         | 54-765                           |
| Luminous Flux (Nom)                | 2500 lm                          |
| Color Designation                  | Cool Daylight                    |
| Lumen Maintenance 10000 h (Nom)    | 73 %                             |
| Lumen Maintenance 2000 h (Nom)     | 90 %                             |
| Lumen Maintenance 5000 h (Nom)     | 81 %                             |
| Correlated Color Temperature (Nom) | 6200 K                           |
| Luminous Efficacy (rated) (Nom)    | 64 lm/W                          |
| Color Rendering Index (Nom)        | 72                               |
| Operating and Electrical           |                                  |
| Power (Nom)                        | 39.0 W                           |
| Lamp Current (Nom)                 | 0.430 A                          |
| Voltage (Nom)                      | 101 V                            |

| Controls and Dimming            |                         |
|---------------------------------|-------------------------|
| Dimmable                        | Yes                     |
| Approval and Application        |                         |
| Energy Efficiency Label (EEL)   | B                       |
| Mercury (Hg) Content (Nom)      | 8.0 mg                  |
| Product Data                    |                         |
| Full product code               | 871150064133500         |
| Order product name              | TL RS 40W/54-765 1SL/25 |
| EAN/UPC - Product               | 8711500641335           |
| Order code                      | 928011305430            |
| Numerator - Quantity Per Pack   | 1                       |
| Numerator - Packs per outer box | 25                      |
| Material Nr. (12NC)             | 928011305430            |
| Net Weight (Piece)              | 0.270 kg                |
| ILCOS Code                      | FD-40/62/2A-L/P-G13     |



# TL Rapid Start Standard Colours

## Dimensional drawing

| Product                    | D (max) | A (max)   | B (max)   | B (min)   | C (max)   |
|----------------------------|---------|-----------|-----------|-----------|-----------|
| TL RS 40W/54-765<br>1SL/25 | 40.5 mm | 1199.4 mm | 1206.5 mm | 1204.1 mm | 1213.6 mm |

### TL 40W/54-765 RS

## Photometric data

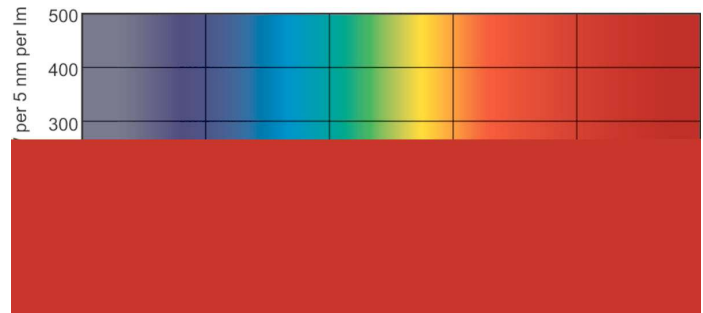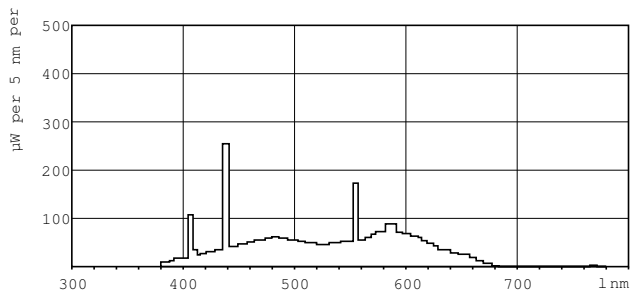

LDPB\_TL-RS\_54-765-Spectral power distribution B/W

LDPO\_TL-RS\_54-765-Spectral power distribution Colour

