

CV 24 V



EASYLINE 24 V C-L

186625, 186626, 186627, 186717

Typical Applications

Built-in in luminaires for 24 V systems

- Retail lighting
- Residential lighting
- Furniture lighting



EasyLine 24 V C-L

- **VERY LOW RIPPLE CURRENT: < 3%**
- **WITH INTEGRATED CORD GRIP FOR INDEPENDENT OPERATION**
- **SELV**
- **SUITABLE FOR BUILT-IN INTO FURNITURE**
- **LONG SERVICE LIFE: UP TO 60,000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



EasyLine 24 V C-L

Product features

- Compact casing shape
- For use in applications with medium and high capacity range of up to 60, 75, 120 and 180 W

Electrical features

- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz
- Screw terminals: 0.75–1.5 mm² or 0.5–1.5 mm² (186717)
- Power factor at full load: > 0.95 C

Safety features


- Protection against transient main peaks
- Electronic short-circuit protection
- Overload protection: reversible
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class II
- SELV

Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
186625	20	100	350
186626	20	100	350
186627	20	70	425
186717	17	77	665


Product guarantee

- 5 years for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

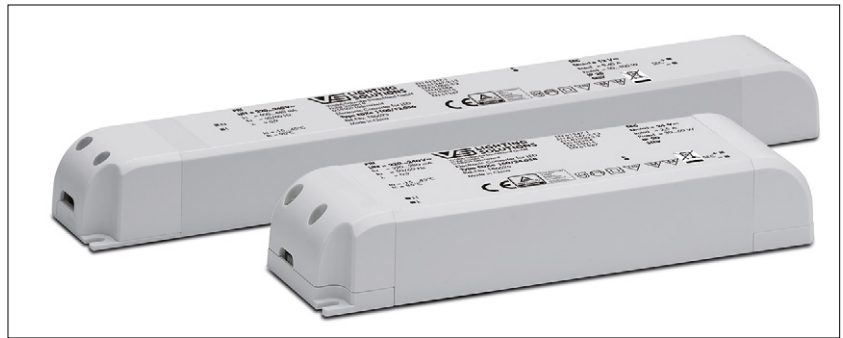

Dimensions

- Casing: K55.1
- Ref. No.: 186625, 186626
- Length: 180 mm
- Width: 52 mm
- Height: 30 mm

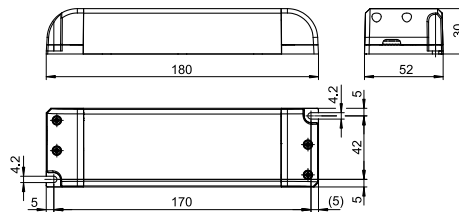

Applied standards


- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015




186625, 186626, 186627



- Casing: K60
- Ref. No.: 186627
- Length: 300 mm
- Width: 40 mm
- Height: 30 mm

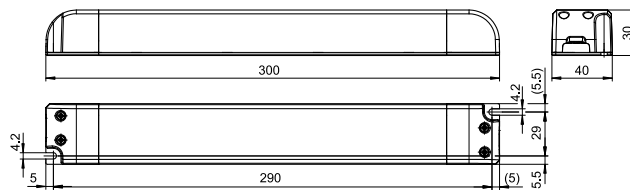

- Casing: K61
- Ref. No.: 186717
- Length: 345 mm
- Width: 50 mm
- Height: 35 mm

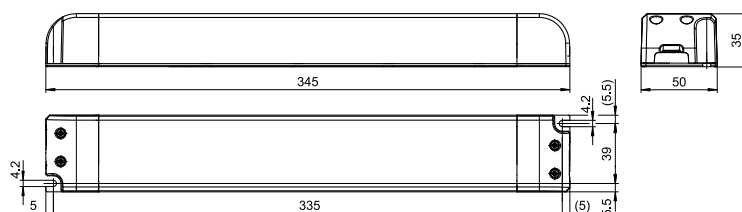

LED-Treiber – EasyLine 24 V C-L

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA (\pm 5%)	Voltage output DC V (\pm 5%)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
60	EDXe 160/24.058	186625	220–240	320–280	37 / 215	0–2500	24	< 5	> 89	\leq 3
75	EDXe 175/24.059	186626	220–240	395–345	35 / 220	0–3125	24	< 6	> 88	\leq 3
120	EDXe 1120/24.060	186627	220–240	640–590	36 / 182.5	0–5000	24	< 16	> 90	\leq 3
180	EDXe 1180/24.070	186717	220–240	900–800	60 / 260	0–7500	24	< 10	> 94	\leq 3

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
186625	-15	+45	20	60	-40	+85	5	95	+85	IP20
186626									+90	
186627	-20	+45							+90	
186717	-20	+50							+95	

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.	186625	186626, 186627	186717		
All	75 °C*	85 °C	80 °C*	90 °C	85 °C*	95 °C
hrs.	60,000	30,000	60,000	30,000	60,000	30,000

* recommended operation temperature

Product labels

PRI
UN = 220...240V~
In = 310...280 mA
fn = 50/60 Hz
 λ = 0,95
N
L

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Leuchtenland GmbH
Hofe, Steiner 8
D-58509 Lüdenscheid
Electronic Converter for LED LED
Type EDXe 160/24.058
Ref.No. 186625
Made in PRC 中国制造

SEC
Urated = 24 V~
Irated = 2,5 A
Prated = 60 W
IP 20
SELV

t_a = -15...45°C
 t_c = 85°C

PRI
UN = 220...240V~
In = 290...335 mA
fn = 50/60 Hz
 λ = 0,95
N
L

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Leuchtenland GmbH
Hofe, Steiner 8
D-58509 Lüdenscheid
Electronic Converter for LED LED
Type EDXe 175/24.059
Ref.No. 186626
Made in PRC 中国制造

SEC
Urated = 24 V~
Irated = 3,125 A
Prated = 75 W
IP 20
SELV

t_a = -15...45°C
 t_c = 90°C

PRI
UN = 220...240V~
In = 640...595 mA
fn = 50/60 Hz
 λ = 0,95
N
L

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Leuchtenland GmbH
Hofe, Steiner 8
D-58509 Lüdenscheid
Electronic Converter for LED LED
Type EDXe 1120/24.060
Ref.No. 186627
Made in PRC 中国制造

SEC
Urated = 24 V~
Irated = 5,00 A
Prated = 120 W
IP 20
SELV

t_a = -20...45°C
 t_c = 90°C

PRI
UN = 220...240V~
In = 900...800 mA
fn = 50/60 Hz
 λ = 0,95
N
L

VS LIGHTING SOLUTIONS
Vossloh-Schwabe Leuchtenland GmbH
Hofe, Steiner 8
D-58509 Lüdenscheid
Electronic Converter for LED
Type EDXe 1180/24.070
Ref.No. 186717
Made in PRC


EN 61347-1
EN 61347-2:13
EN 61000-3-2
EN 62384
EN 55015
EN 61547

t_a = -20...50°C
 t_c = 95°C


SEC
Urated = 24 V~
Irated = 7,5 A
Prated = 180 W
IP 20
SELV

Typ. performance graphs for 186625 / Type EDXe 160/24.058


Working area

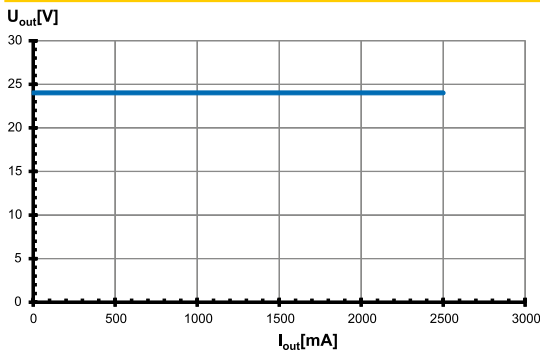


Efficiency

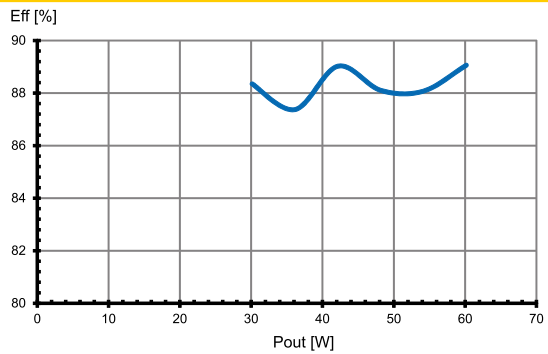

Power factor

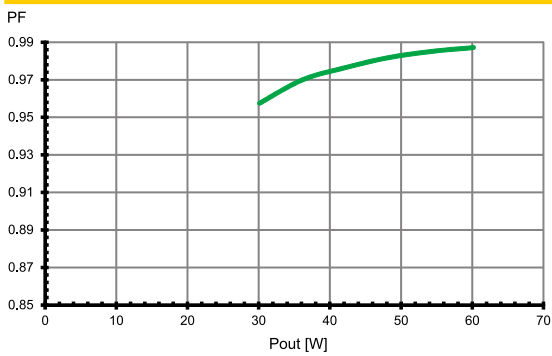


Total harmonic factor (THD)

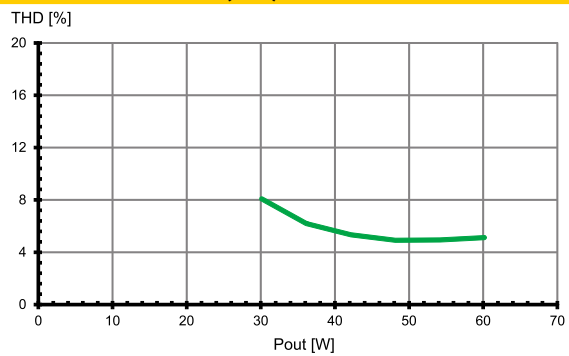


Typ. performance graphs for 186626 / Type EDXe 175/24.059


Working area

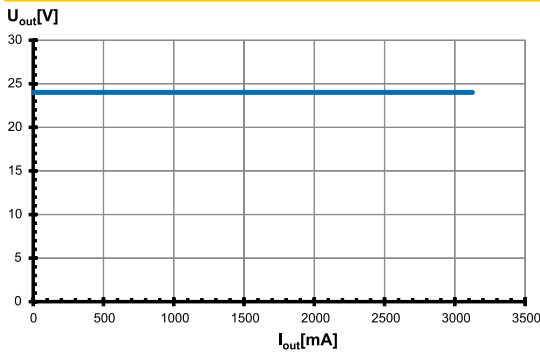


Efficiency

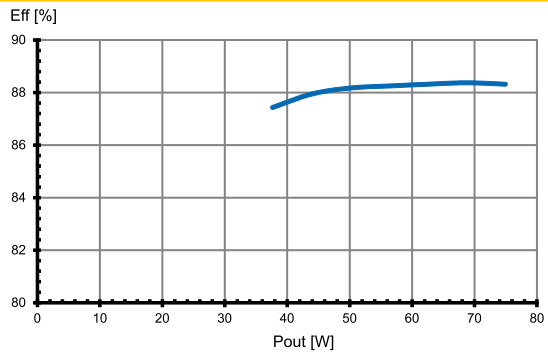

Power factor

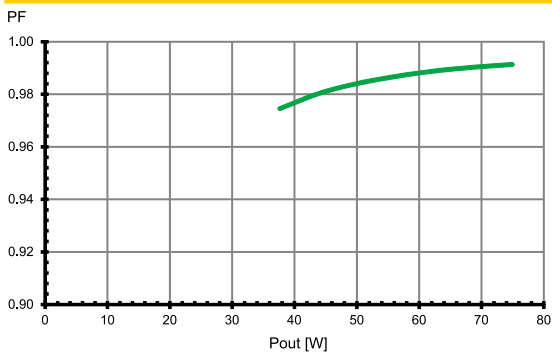


Total harmonic factor (THD)

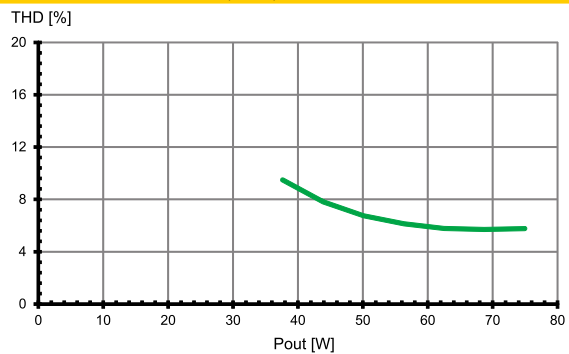


Typ. performance graphs for 186627 / Type EDXe 1120/24.060


Working area

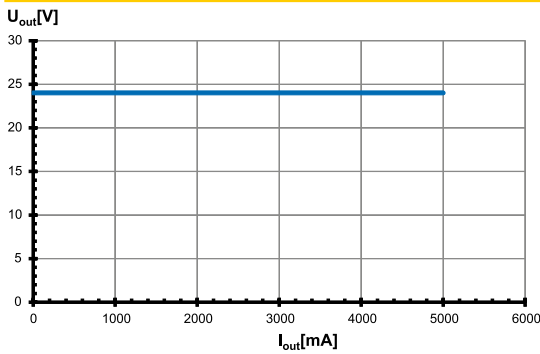


Efficiency

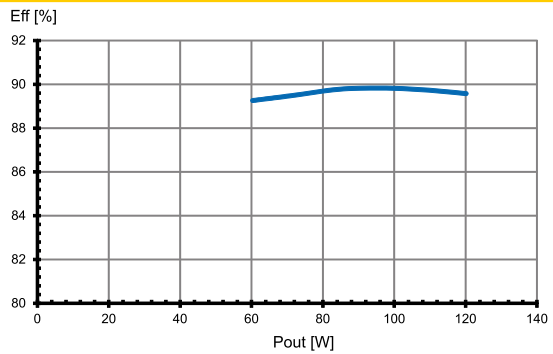

Power factor

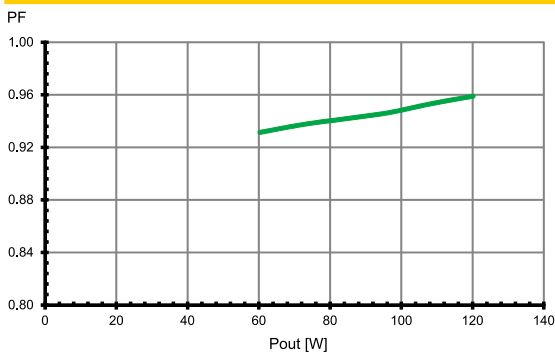


Total harmonic factor (THD)

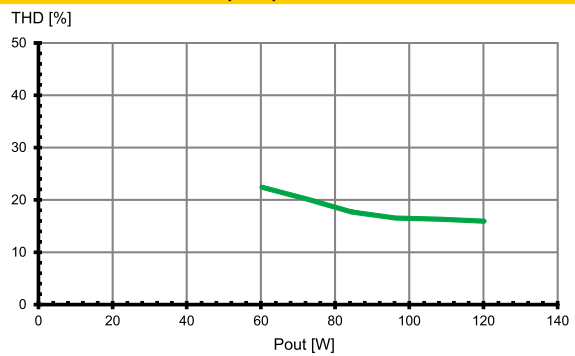


Typ. performance graphs for 186717 / Type EDXe 1180/24.070


Working area

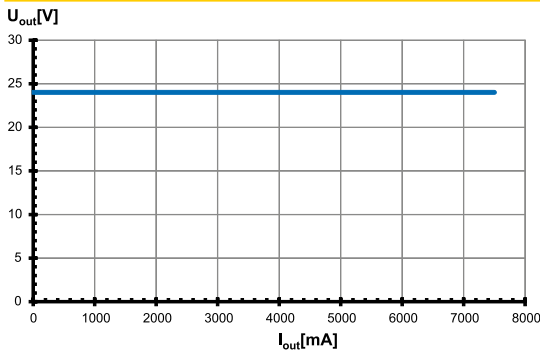


Efficiency

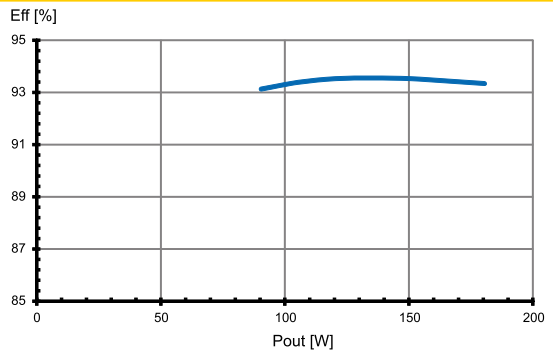

Power factor

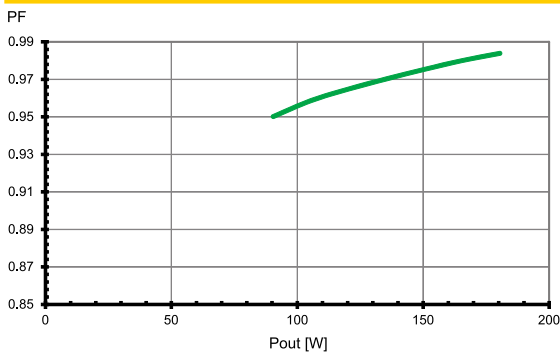

Total harmonic factor (THD)

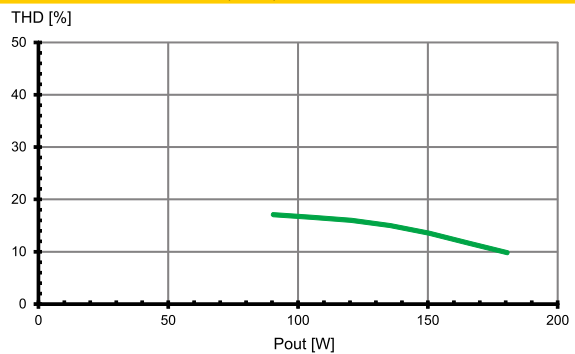

Safety features

- Transient mains peaks protection:
Values are in compliance with EN 61547
(interference immunity).
Surges between L-N: up to 1 kV
Surges between L/N-PE: up to 2 kV
- Short-circuit protection:
The control gear is protected against
permanent short-circuit with automatic restart
function.
- Overload protection: The control gear only works in range of rated
output power and voltage problemfree.
Please check that the selected LED load is
suitable (see Electrical Characteristics on
this data sheet).
- No load operation: The control gear is protected against no load
operation (open load).
- If any of the above mentioned safety functions will be triggered,
disconnect the control gear from the power supply then find and
eliminate the cause of the problem.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Drivers are suitable for independent operation.
- Mounting location: Independent LED drivers do not need to be integrated into a casing.
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.
LED drivers should be mounted with the greatest possible clearance to heat sources. During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

Electrical installation

- Connection terminals: Screw terminals for rigid or flexible conductors with a section of 0.75–1.5 mm² or 0.5–1.5 mm² (186717)
- Stripped length: 8.5–10 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed
- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.

- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
EDXe 160/24.058	186625	10	13	16	17	22	27
EDXe 175/24.059	186626	10	13	16	17	22	27
EDXe 1120/24.060	186627	12	16	19	14	18	22
EDXe 1180/24.070	186717	5	6	8	8	11	13

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.