



Ex




概述

适用于含有氢气气体与空气混合物，乙炔气体与空气混合物及其他含有可燃性气体混合物的1-2区危险场所照明用。

Summary

It is suitable for use in the 1-2 zone dangerous places which contain hydrogen gas and air mixture, acetylene gas and air mixture and other mixer containing combustible gas as illumination.

技术参数 Technical Parameter

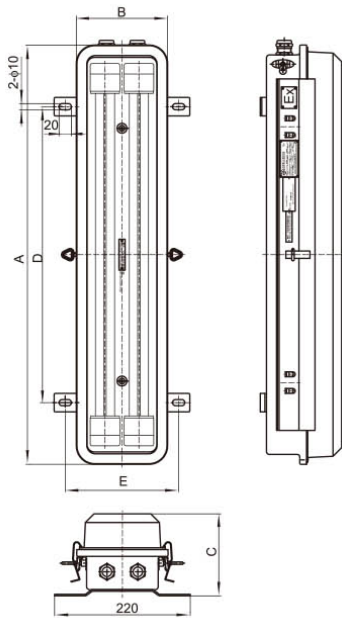

名称 Name	防爆LED舱顶灯	LED pendant light
型号 Model	DLE1224	DLE2224
防爆标志 Explosion-proof mark	Ex demb IICT6 Gb	
功率 Power	10Wx2	20Wx2
电压 Voltage/ 频率 Frequency	AC100~240V 50/60Hz	
电流 Current	0.3A/0.25A	0.5A/0.3A
色温 Color temperature	3000-6000k 可选 Or choose	
光通量 Luminous flux	1600Lm	3200Lm
防护等级 Enclosure	IP66	
材质 Material	不锈钢 / 钢板 Stainless steel/	
重量 Weight	6.2kg	12.5kg

型号 Model	A	B	C	D	E
dLE1224	680	147	133	480	185
dLE2224	1290	147	133	700	185

