



5 Years Warranty

### Features



- Main structural components for lamp body is ADC12 Die-cast aluminum, with advantages of Shock Resistance, Corrosion Resistance.
- High temperature resistance silicone seals, no atomization.
- Electrostatic spray processing for Structural components.
- Corrosion Resistance, fungus-proof testing for 1000hrs.
- Imported PC material for optical lens.
- IP65 Waterproof
- Application for Square, Billboard, Parking Lot, Garden, Building, Factory, Warehouse, Stadium, Gas Station, etc.

### INTEGRATED PHOTOCELL



Built-in photocell sensor to automatically turn on at night and off during the day for increased efficiency

### Dimension

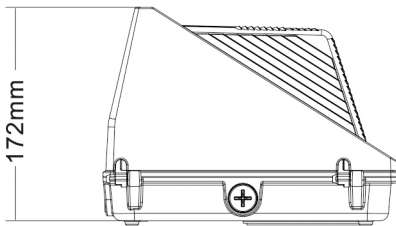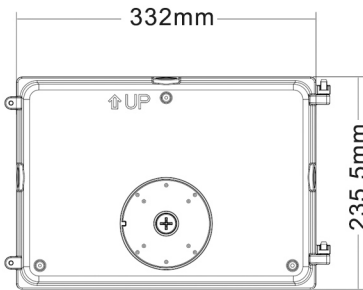

Parameter	Rating
Heat Sink Temp	65°C
Operating Temp	-20 ~+ 45°C

## Ordering information

Model	Power	Size	Lumen	Beam Angle	CCT	Voltage	Power Factor	CRI	Net Weight
CH-WPK-W40-S7	40W	332*235.5*172mm	4800lm	120°	2700/3000/4000/5000/>6000K	AC100-277V AC100-347V	>0.95	≥83	2.08kg
CH-WPK-W60-S7	60W	332*235.5*172mm	7200lm	120°	2700/3000/4000/5000/>6000K	AC100-277V AC100-347V	>0.95	≥83	2.08kg
CH-WPK-W100-S7	100W	332*235.5*172mm	12000lm	120°	2700/3000/4000/5000/>6000K	AC100-277V AC100-347V	>0.95	≥83	2.72kg
CH-WPK-W120-S7	120W	332*235.5*172mm	14400lm	120°	2700/3000/4000/5000/>6000K	AC100-277V AC100-347V	>0.95	≥83	2.72kg

## Installation



## Product Packing Specification

Packing Details	40W-60W
Box Size	38*24.5*19.3CM
Pack Quantity	1pcs/ctn
Gross Weight	2.5kg
CTN Size	38*24.5*19.3CM

Packing Details	100-120W
Box Size	38*24.5*19.3CM
Pack Quantity	1pcs/ctn
Gross Weight	3.15kg
CTN Size	38*24.5*19.3CM

