

SAFEWAY LED TWIN EMERGENCY LIGHT DL 2018NM



PLS Listed
Emergency
Lighting



PSB Singapore



EMERGENCY LIGHT




Features and Application

- Self-contained dual lamp LED emergency light.
- Twin head lamps can be rotated to allow flexible positioning of lights into various directions.
- LED lamps provide high efficiency, durability and low energy consumption.
- Suitable for indoor installations such as staircases, walk ways, carparks, warehouses, etc.

Technical Data

Mode of Operation	Non-maintained
Lamp	2 x 3W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50Hz/60Hz
Power Consumption	< 2W
Battery	High temperature NICD battery
Charger	Fully automatic
Charging Monitor	Ø 5mm green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Injection moulded fire retardant polycarbonate housing
Weight (Nett/ Gross)	0.8 kg / 1 kg
Compliance	SS 563-2/A1:2013; SS IEC 60598-2-22:2016 SS IEC 60598-1:2016
Installation	Wall or pendant mounting
Cable Entry	Standard 20mm Ø knockout hole
IP Rating	IP20
Warranty	1 year

Dimensions (mm)

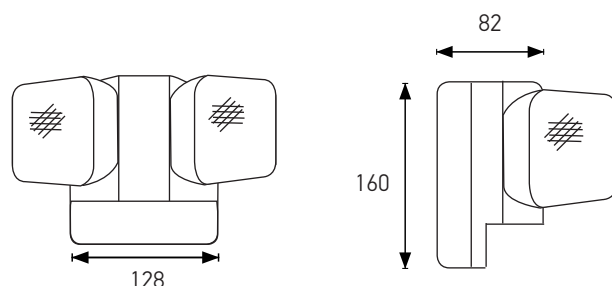

Ordering Information

MODEL	LAMP
DL 2018NM	2 x 3W High flux white LED