


- ▲ Input Voltage 220-240VAC
 - ▲ Protections: short circuit/over load/over voltage/over temperature
 - ▲ IP20 Ingress protection
 - ▲ Power Factor 0.5
 - ▲ Efficiency ≥78%
 - ▲ Class II, SELV
 - ▲ 3 years warranty

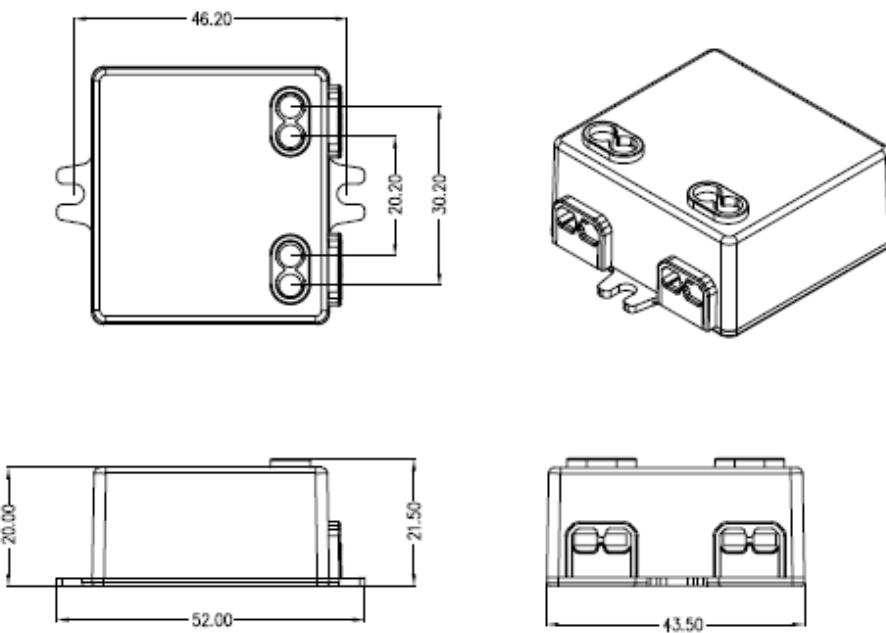

The image shows the SELV logo, which consists of the letters 'SELV' in a bold, sans-serif font followed by a small square containing a checkmark symbol. To the right of this is the 'CE' marking. Below these symbols is a circular seal with the word 'TÜV' at the top and 'Rheinland' at the bottom. In the center of the seal, there is a stylized letter 'A'. The word 'CERTIFIED' is printed at the bottom of the seal.

SPECIFICATION

MECHANICAL SPECIFICATIONS


Model list:

Model number	Input			Output		
	Voltage (VAC)	Cerrent (A)	Frequency (Hz)	Constant current (mA)	Normal working voltage (VDC)	No load working voltage (VDC)
EBP006C0150SS	220-240	0.10	50/60	150	20.0-40.0	50
EBP006C0200SS	220-240	0.10	50/60	200	15.0-30.0	42
EBP006C0250SS	220-240	0.10	50/60	250	12.0-24.0	36
EBP006C0300SS	220-240	0.10	50/60	300	10.0-20.0	32
EBP006C0350SS	220-240	0.10	50/60	350	8.5-17.5	28
EBP006C0400SS	220-240	0.10	50/60	400	7.5-15.0	25
EBP006C0450SS	220-240	0.10	50/60	450	6.5-13.5	23
EBP006C0500SS	220-240	0.10	50/60	500	6.0-12.0	23
EBP006C0550SS	220-240	0.10	50/60	550	5.5-11.0	22
EBP006C0600SS	220-240	0.11	50/60	600	5.5-11.0	22
EBP006C0650SS	220-240	0.12	50/60	650	5.5-11.0	22
EBP006C0700SS	220-240	0.13	50/60	700	5.5-11.0	22