ELXc - Warm Start for T5 and T8 Lamps

Electronic built-in ballasts


Casing: metal


Power factor: ≥ 0.95


RFI-suppressed

For luminaires of protection class I

Degree of protection: IP20 For lighting systems with high switching frequency (> 5/day)

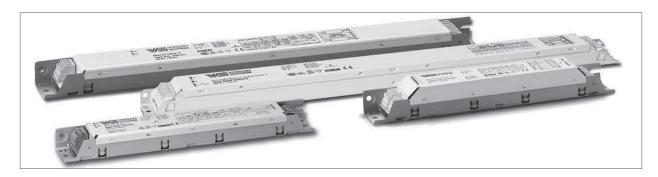





M10/M11

