

## EUP150A-1W24V-1 (Product No.:103200041101)

### Summary

EUP150A-1W24V-1 is a constant voltage mode output LED driver. This driver can be controlled by external signal (0/1-10V active signal, adjustable resistance and PWM signal) to achieve a smooth dimming effect.

### Product Features

- Signal channel constant voltage, 24VDC output
- Support passive 0/1-10V analog dimming signal
- Dimming range from 0-100%, LED start at 1% possible
- Wide range voltage Input 100-240VAC
- High efficiency: up to 90%
- High PF:>0.95(115VAC)
- Dimming effect smooth, no flicker
- Output short circuit protection , over power protection, over current protection



### Application



Wall Washer



LED Strip Light



LED Tube



Underground Light





AR111 Venture Light

### Technical Parameters

Model	EUP150A-1W24V-1	
Input	Efficiency	90%@230VAC,Full load
	Voltage	100VAC-240VAC
	Frequency Range(Hz)	50/60Hz
	Power Factor	≥0.9@230VAC,Full load
	AC Current(max)	2Amax@100VAC
	Inrush Current(max)	30A@230VAC
Output	Current / Voltage / Power	6.25A/24VDC/150W
	R & N (Max)	200mVp-p
	Channel	1
	Voltage Accuracy	±5%
Function	Dimming Type	0/1-10V active signal, adjustable resistance, PWM
	Dimming Range	0.1%-100% Dimming to off
Protection	Short Circuit	Hiccup mode, recovers after fault condition is removed
	Over Current	Hiccup mode, recovers after fault condition is removed
	Over Voltage	Close output, recovers automatically after fault removed
Others	Working Temp.	-30°C~40°C
	Storage Temp., Humidity	-40°C~85°C, 20-90%RH
	t <sub>c</sub>	/°C
	Material	Metal
	IP Rating	IP20
	Lifetime	30,000h@t <sub>c</sub> /°C
	Warranty Condition	3 years
	Switch Cycle	>15,000 times
	Packing(weight)	Net weight: 662.5g±5%/PCS; 20PCS/Cartron;13.75kg±5%/Cartron; Carton Size: 338*228*248mm(L*W*H)
Dimension	206*75*40mm (L*W*H)	


### Dimension(mm)

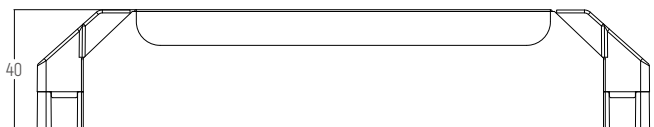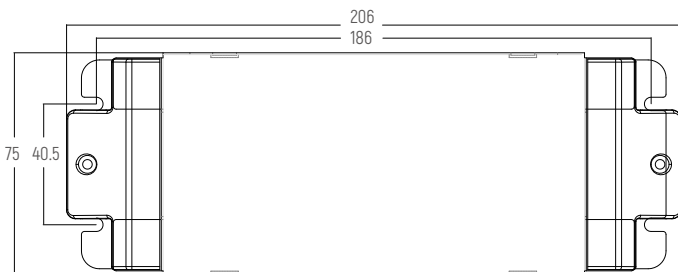

## 0/1-10V Wiring



## Dimming Curve

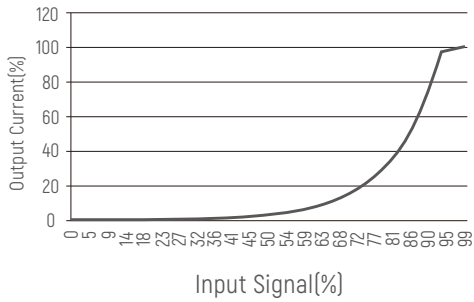

## Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life. Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75- 2.5mm<sup>2</sup> is recommended for input and output terminal(s)(excluding signal terminals). Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail.Please contact us if you have any questions .

## EUP150A-1W24V-1 (产品代码:103200041101)

### 概述

EUP150A-1H24V-1是一款可以用于室内的恒压输出LED调光驱动器。

这款驱动器可以通过外部0/1-10V有源信号，可调电阻和PWM信号实现平滑调光的效果。



### 产品特点

- 单通道恒压输出，每通道 24V 直流输出
- 支持无源 0/1-10V 模拟调光信号
- 调光范围从 0-100%，LED 亮度从 1%启动
- 宽电压输入 100-240VAC
- 高效率：达到 90%
- 高 PF:>0.95(115VAC)
- 调光曲线平滑，无抖动
- 具有输出短路保护，过压保护，过流保护



### 应用



洗墙灯



LED灯带



LED硬灯条



地埋灯




AR111斗胆灯

### 技术参数

型号	EUP150A-1H24V-1	
输入	效率	90%@230VAC, 满载
	电压	100VAC-240VAC
	频率	50/60Hz
	功率因素	≥0.95@230VAC, 满载
	THD	<10%@230VAC, 满载
	电流	2Amax@100VAC
	浪涌电流	30A@230VAC
输出	电流/电压/功率	6.25A/24VDC/150W
	波纹	200mVp-p
	通道	1
	电流公差	±5%
功能	调光方式	0/1-10V有源信号，可调电阻，PWM信号
	调光范围	0.1%-100% 变暗直至关闭
保护	短路	打嗝，移除故障后自恢复
	过流	打嗝，移除故障后自恢复
	过压	关断输出，去除故障后恢复正常
其它	工作温度	-30°C~40°C
	储存温度、湿度	-40°C~85°C, 20-90%RH
	tc	/°C
	材质	金属
	防水等级	IP20
	寿命	30,000小时@tc:/°C
	质保	3年
	开关周期	>15,000次
	包装尺寸(重量)	净重: 662.5g±5%/PCS; 20PCS/ Carton; 13.75kg±5%/箱; 外箱尺寸: 338*228*248cm[长*宽*高]
尺寸	206*75*40mm (长*宽*高)	


### 尺寸(mm)

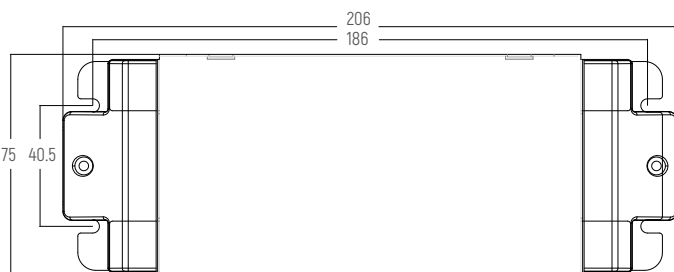

## 接线图



## 调光曲线

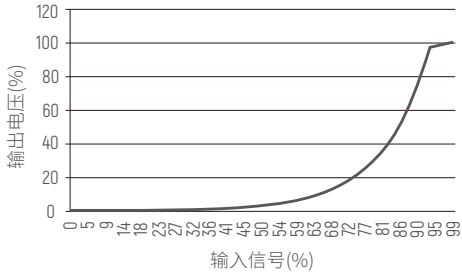

## 注意事项:

- 1、本产品请由具有专业资格的人员进行调试安装。
- 2、本产品不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
- 3、良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
- 4、请检查使用的LED电源输出电压电流，是否符合产品要求。
- 5、出于安全考虑，推荐输入和输出（信号端除外）用0.75-2.5mm<sup>2</sup> PVC或橡胶线缆，并确保接线牢固，以免电线过热或接触不良触发事故。扁平电源线不适用。
- 6、通电调试前，应确保所有接线正确，避免因接线错误而导致灯具损坏。
- 7、如果发生故障，请勿私自维修；如有疑问，请联系供应商。