


# I Series

## LED Explosion Proof Light

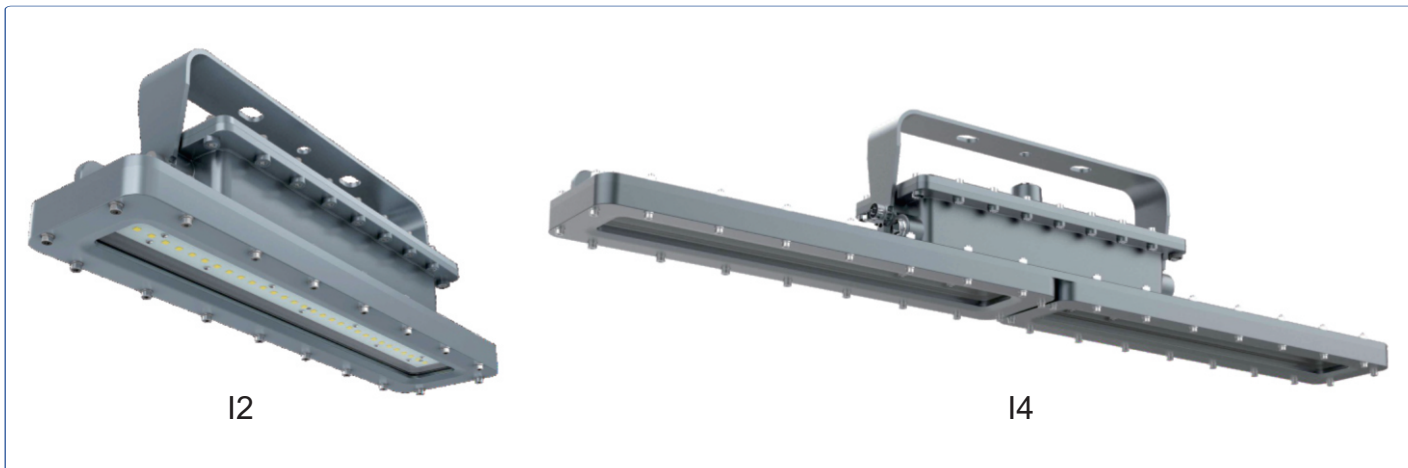

### Certifications:

- ◆ Marking ATEX
  - ◆ II2 G Ex db IIB T4 Gb
  - ◆ II2 D Ex tb IIIC T63.5°C Db IP66
- ◆ Marking IECEx
  - ◆ Ex db IIB T4 Gb
  - ◆ Ex tb IIIC T63.5°C Db IP66
- ◆ Marine Marking
  - ◆ UL 1598
  - ◆ UL1598A
  - ◆ ABS
- ◆ Marking UL844 (North American)
  - ◆ Class I, Division 1, Groups C, D
  - ◆ Class I, Division 2, Groups A, B, C, D
  - ◆ Class II, Division 1, Groups E, F, G
  - ◆ Class II, Division 2, Groups F, G
  - ◆ Class III
- ◆ IP66

### Standard Materials:


- ◆ Housing: Copper-free aluminum
- ◆ Lens: Tempered Glass
- ◆ Hardware: Stainless steel
- ◆ Mounting Bracket: Stainless steel

## LED Explosion Proof Light - I Series

### Key Features:

- ① Dimming function available; battery backup optional.
- ② High-quality SMT LED and Meanwell driver.
- ③ Heavy-duty and high impact resistance.
- ④ Replaceable LED board and drivers.
- ⑤ Integrated junction box for driver.
- ⑥ Marine rating powder coated finish treatment.
- ⑦ High efficacy - up to 140 lumens per watt.
- ⑧ 5-year warranty
- ⑨ Low temperature applications to -40°C (-40°F) and high temperature up to 60°C (140°F).

### Catalog Number Logic:

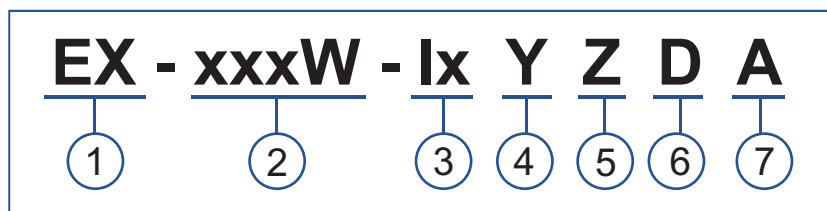

- ① **PRODUCT CATEGORY**
  - ◆ Explosion proof light
- ② **WATTAGE**
  - ◆ 20W-120W
- ③ **PRODUCT SERIES**
  - ◆ I2    ◆ I4
- ④ **DIMMING OPTION**
  - ◆ D= Dimmable
  - ◆ N= Non-dimmable
- ⑤ **CCT**
  - ◆ From 2200K to 7000K
  - ◆ 22=2200K, 30=3000K, ..., 70=7000K
- ⑥ **BEAM ANGLE**
  - ◆ D40= 40°    ◆ D90= 90°
  - ◆ D60= 60°    ◆ D120= 120°
- ⑦ **GLASS TYPE**
  - ◆ A=blank: Flat glass
  - ◆ A=C: Spherical glass

### Technical Data:

Model	Wattage	Operating Voltage	Lumens (lm)	Efficacy (lm/W)	CRI	CCT	Emergency Time
EX-20W I2YZDA	20W	AC100-277V/200-480V or DC12-36V	2,800	140	>70	2200K-7000K	3 hours
EX-40W I2YZDA	40W		5,600				
EX-50W I2YZDA	50W		7,000				
EX-60W I2YZDA	60W		8,400				
EX-40W I4YZDA	40W		5,600				
EX-60W I4YZDA	60W		8,400				
EX-80W I4YZDA	80W		11,200				
EX-100W I4YZDA	100W		14,000				
EX-120W I4YZDA	120W		16,800				



### Packing Information:

Model	Quantity/Carton	Packing Size	Net Weight	Gross Weight
I2	1 PCS	30.31x13.39x10.43inch	12 kg/ 26.45 lbs	14 kg/ 30.86 lbs
I4	1 PCS	53.54x13.39x10.43inch	18.5 kg/ 40.79 lbs	21.5 kg/ 47.40 lbs



**LED Explosion Proof Light - I Series**

**Dimensions:**


**I2 Series**

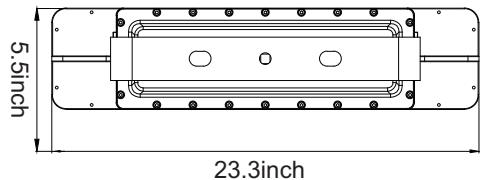


**I4 Series**

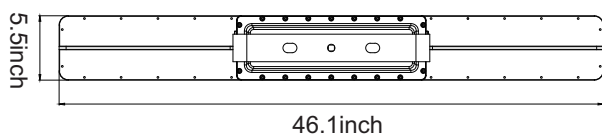


**Photometry:**




Beam angle: 40°



Beam angle: 60°



Beam angle: 90°




Beam angle: 120°


## LED Explosion Proof Light - I Series

### Mounting Methods:


#### ◆ Ceiling Mounting:

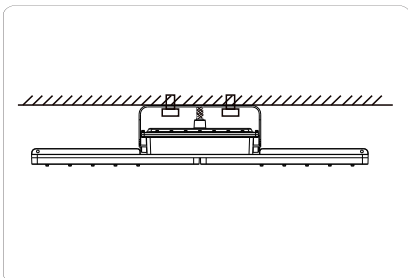


#### ◆ Wall Mounting:



#### ◆ Chain Mounting:

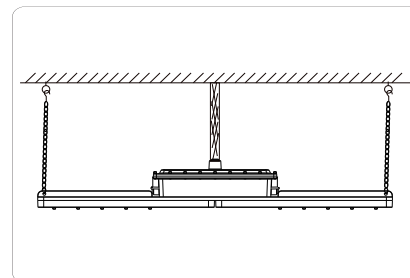

#### ◆ Pole Pendant Mounting:

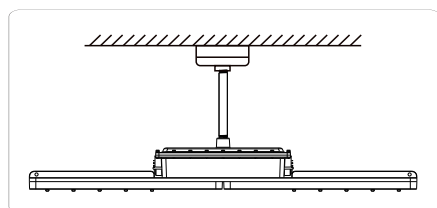

### Accessories:



- Model: Ex-Junction Box  
Name: Junction Box  
Material: Aircraft Aluminum A383



- Model: EX-Straight Pipe  
Name: Straight Pipe  
Material: Iron



- Model: Ex-Conduit 01  
Name: Metal Conduit  
Material: Stainless Steel and Aluminum



- Model: EX-Bended Pipe  
Name: Bended Pipe  
Material: Iron



- Model: Ex-Chain  
Name: Pendant Chain  
Material: Stainless Steel S3040



- Model: Ex-Bracket  
Name: U-bracket  
Material: Stainless Steel

### Application :

- ◆ Oil and gas industry
  - All petroleum production and refining
  - Petroleum loading and transportation
  - Petroleum storage and retail
  - LNG industry
  - All mining operations and service
- ◆ Ocean, marine and aerospace field
  - Ocean platform operation facilities
  - Aerospace clean room and production
  - Ocean vessel operations
- ◆ Food and alcohol industry
  - Flour and fine particle production and storage
  - Food and distilling production
  - Alcohol industry
- ◆ Chemical industry
  - All types of paint facilities
  - Chemical production and storage
- ◆ Metal treatment
  - Steel and aluminum factories
  - Pumping stations in any environment
  - Metal smelting, foundry and fabrication
- ◆ Other high humidity, high dust, high temperature, vapor locations.