

EASI LED SURFACE EMERGENCY LIGHT

EmLED-12NM DRUM / EmLED-14NM DRUM

NEW



PLS Listed
Emergency
Lighting



PSB Singapore




Features and Application

- New compact all-in-one, self-contained LED emergency light for surface installation on ceilings designed for easy installation and usage.
- Suitable for various indoor environments such as retail, commercial, hospitality and healthcare industries.
- LED lamps provide high efficiency, durability and low energy consumption.

Technical Data

Mode of Operation	Non-maintained
Lamp	Samsung 2W/4W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50Hz/60Hz
Power Consumption	< 2W
Battery	High temperature NICD/NIMH battery
Charger	Fully automatic
Charging Monitor	Green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Polycarbonate
Weight (Nett)	EmLED-12NM: 0.28 kg EmLED-14NM: 0.36 kg
Compliance	SS 563-2:2010/A1:2013 SS IEC 60598-2-22:2016 SS IEC 60598-1:2016
Installation	Surface mount
IP Rating	IP 20
Warranty	1 year

Dimensions (mm)

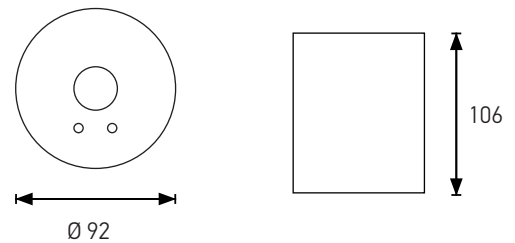

Ordering Information

MODEL	LAMP
EmLED-12NM DRUM	Samsung 2W High flux white LED
EmLED-14NM DRUM	Samsung 4W High flux white LED

EMERGENCY LIGHT