

2.4GHz RF Remote

12 keys remote control.

RF 2.4GHz wireless signal.

Work with F4-3A/F4-5A/F4-CC wireless drivers to control LED fixtures.

EX series touch panel optional.

Main Characteristics

Dimming

3Vdc (Battery CR2032)

2.4GHz


-20 ~55

L145xW40xH12(mm)

L150xW46xH18(mm)


85g

Wiring Diagram

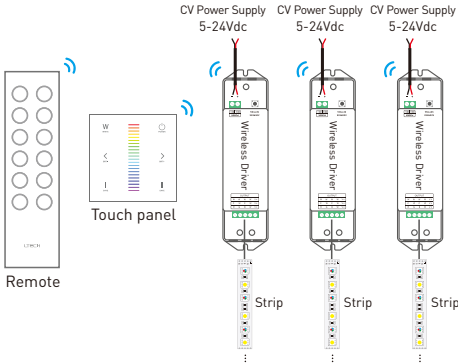

Dimensions

Unit : mm



F series remote can control wireless driver directly, please refer to the manual of wireless driver for match code method.
 F series remote can work with EX series touch panel, please refer to the manual of touch panel for match code method.

Match/Clear code between remotes

1. Assuming that B match up with A. Short press the bottom two keys of B simultaneously, the indicator light keeps on after release.



2. Then press any key on A in 5 seconds. When the indicator light of B turns off, match successfully.



Clear code

Press the bottom two keys of remote simultaneously (about 10 seconds) until the indicator light keeps on, deactivated the matching successfully.

