


LED Light Fittings

HRJ Series Explosion-proof Emergency LED Light Fittings



- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 2, Groups A, B, C, D
- ◆ Isolated LED lamp compartment, CC-CV (constant current - constant voltage) power controller compartment and terminal compartment; Wind-convection heat dissipation structure.
- ◆ International brand white light LED, reasonable arrangement of multi LED, high lighting efficiency and long service life.
- ◆ Emergency device with battery pack, charging automatically; when power supply is cut off, the emergency device starts to work; with overcharge and overdischarge protection.
- ◆ Toughened glass cover resistant to temperature changes.
- ◆ Low-maintenance due to long service life is up to 100,000 operating hours.

■ Catalogue number logic

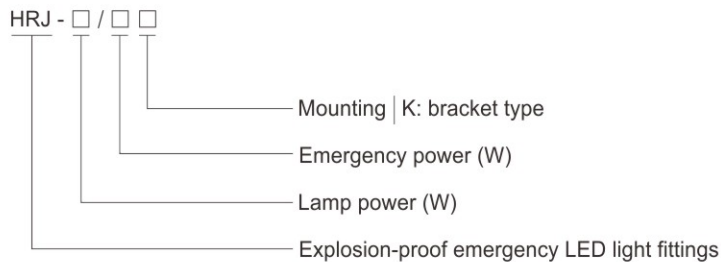

Zones 1&2; 21&22

LED Light Fittings

HRJ Series Explosion-proof Emergency LED Light Fittings

Technical data

Explosion-proof emergency LED light fittings HRJ-30/20□

Explosion protection

Global (IECEX)

IECEX CNEX 20.0005X

Gas and dust

Ex db op is IIC T6 Gb

Ex tb op is IIIC T80°C Db IP66

Europe (ATEX)

CNEX 20 ATEX 0004X

Gas and dust

⊕ II 2 G Ex db op is IIC T6 Gb

⊕ II 2 D Ex tb op is IIIC T80°C Db IP66

Certificates

IECEX; ATEX; CU-TR

Conformity to standards

EN 60079-0, EN 60079-1, EN 60079-28, EN 60079-31

IEC 60079-0, IEC 60079-1, IEC 60079-28, IEC 60079-31

Material

Enclosure

Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021)

Glass cover

Toughened glass, stands 4J impact

Exposed fastener

Stainless steel

LED driver

Wide voltage input, CC-CV (constant current - constant voltage) output, with function of distributed current, constant current, surge-proof and anti-electromagnetic interference, and protection against overcurrent, open circuit, and short circuit

Emergency controller

Special emergency controller and battery pack, with protection against over-charge and overdischarge

Lamp

Lamp specification

LED module, Multiple LED

Lamp power (W)

30W

Emergency power (W)

20W

Colour rendering index (Ra)

≥80

Colour temperature (CCT)

5700K

Note: cool white is available in general. Warm white or nature white is optional, please specify when ordering.

Rated voltage

100~277V AC 50/60Hz

Charging time

24h

Emergency duration

90min(120min is optional)

Earthing protection

M5 (internal & external earth bolts)

Degree of protection

IP66, IP67(optional)

Ambient temperature

-40°C~+60°C

Terminal

5 x 1.5~4mm²

Mounting

bracket type

Cable entries

2 x M25 x 1.5

Cable gland


DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~29

Weight

9.95kg



Dimension drawings (all dimensions in mm) - subject to alteration

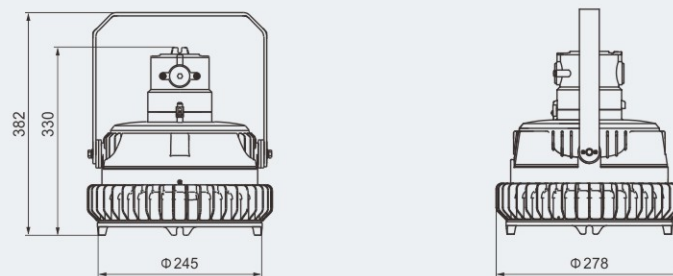

HRJ-30/20□

LED Light Fittings

HRJ Series Explosion-proof Emergency LED Light Fittings

Technical data

Explosion-proof emergency LED light fittings HRJ-60/40□

Explosion protection

Global (IECEX)
Gas and dust

IECEX CNEX 20.0005X
Ex db op is IIC T6 Gb
Ex tb op is IIIC T80°C Db IP66

Europe (ATEX)
Gas and dust

CNEX 20 ATEX 0004X
⊕ II 2 G Ex db op is IIC T6 Gb
⊕ II 2 D Ex tb op is IIIC T80°C Db IP66

Certificates

Conformity to standards

IECEX; ATEX; CU-TR
EN 60079-0, EN 60079-1, EN 60079-28, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-28, IEC 60079-31

Material

Enclosure
Glass cover
Exposed fastener
LED driver

Copper-free Aluminium Alloy, powder coated surface, yellow (RAL1021)
Toughened glass, stands 4J impact

Stainless steel

Wide voltage input, CC-CV (constant current - constant voltage) output, with function of distributed current, constant current, surge-proof and anti-electromagnetic interference, and protection against overcurrent, open circuit, and short circuit

Emergency controller

Special emergency controller and battery pack, with protection against over-charge and overdischarge

Lamp

Lamp specification
Lamp power (W)
Emergency power (W)
Colour rendering index (Ra)
Colour temperature (CCT)

LED module, Multiple LED

60W

40W

≥80

5700K

Note: cool white is available in general. Warm white or nature white is optional, please specify when ordering.

Rated voltage

100~277V AC 50/60Hz

Charging time

24h

Emergency duration

90min(120min is optional)

Earthing protection

M5 (internal & external earth bolts)

Degree of protection

IP66, IP67(optional)

Ambient temperature

-40°C~+60°C

Terminal

5 x 1.5~4mm²

Mounting

bracket type

Cable entries

2 x M25 x 1.5

Cable gland


DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~29

Weight

12.85kg



Dimension drawings (all dimensions in mm) - subject to alteration

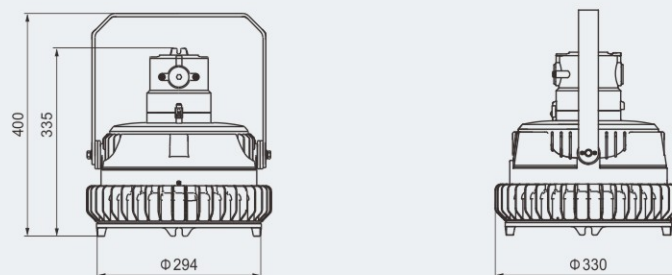

HRJ-60/40□


LED Light Fittings

HRJ Series Explosion-proof Emergency LED Light Fittings

Photometric data Note: LED luminous flux is from the standard product of which colour temperature is 5700K (cool white).


HRJ-30/20□

Lamp power (W)	Luminous flux	Wattage
30	3300lm	31.5W

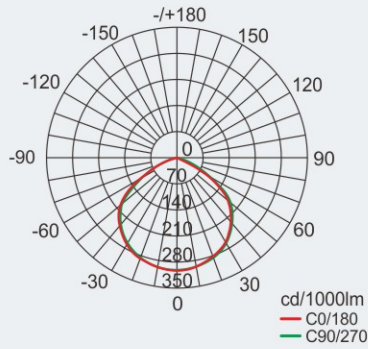

HRJ-60/40□

Lamp power (W)	Luminous flux	Wattage
60	6350lm	60W

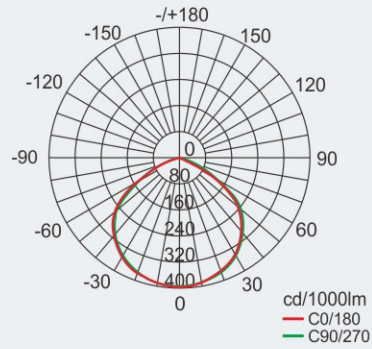

Mounting type (all dimensions in mm) - subject to alteration

K: bracket type

