


LUMINAIRE SPECIFICATION SHEET

Product No. : **KLO-MGL 1195x295 6000K – LED BACKLIT PANEL**

Mounting Type : **LAY-IN, RECESSED, SUSPENSION**

Lay-in/Recessed/Suspension backlit LED panel luminaire with frosted acrylic diffuser.
LED color temperature 6000K. Aluminium rectangle white trim. For indoor use.

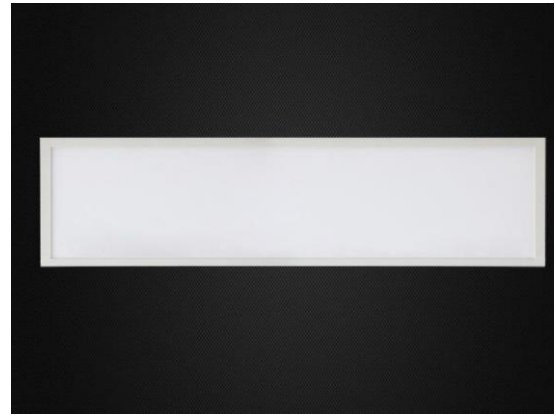

SPECIFICATIONS

Power (W)	: 36W
Lamp Source	: LED Strip
Color Temperature	: 6000K
Lumen output	: 120 Lm/w
Color Rendering (CRI)	: >80
Fixture Dimension	: 1195 x 295 x H:30mm
Input Voltage	: 220-240VAC, 50-60Hz, 900mA
Material	: Powder painted. Aluminum.

LED Driver option:

- Non-dim LED driver OR
- Dimming 0-10V

APPLICATIONS

For indoor use. In offices (receptions, boardrooms, restaurants etc.) Public buildings: cinema, theatres, swimming pools, exhibition halls) Hotel lobbies, Retail (high end shops, supermarkets, bakery/butcher areas, leather goods etc)