

LUMINAIRE SPECIFICATION SHEET


Product No. : KLO-MGL 600x600-4000K – LED BACKLIT PANEL


Mounting Type : LAY-IN, RECESSED, SUSPENSION

Square Lay-in/Recessed/Suspension backlit LED panel luminaire with frosted acrylic diffuser.

LED color temperature 4000K, cool white. Aluminium square white trim.

For indoor use.

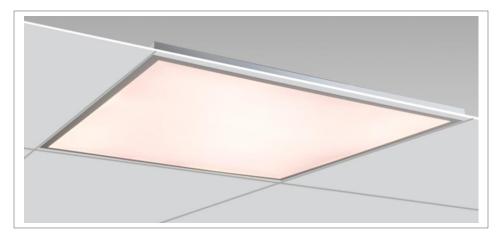



SPECIFICATIONS

Power (W) : 36W

Lamp Source : LED Strip

Color Temperature : 4000K, Cool White

Lumen output : 120 Lm/w

Color Rending (CRI) :>80

Fixture Dimension : 595 x 595 x H:30mm

Input Voltage : 220-240VAC, 50-60Hz, 900mA Material : Powder painted. Aluminum.

LED Driver option:

- Non-dim LED driver OR

- Dimming 0-10V

APPLICATIONS

For indoor use. In offices (receptions, boardrooms, restaurants etc.) Public buildings: cinema, theatres, swimming pools, exhibition halls) Hotel lobbies, Retail (high end shops, supermarkets, bakery/butcher areas, leather goods etc)