

MR16I/GU10I

PC coated aluminium housing LED lamps, ideal replacement for traditional spotlight



GX5.3 base (Class III)



GU10 base (Class II)



APPLICATIONS

- Suitable for use in fittings with either a GX5.3 or GU10 lamp holder

TECHNICAL DETAILS

- High Power LEDs



CONSTRUCTION

- Polycarbonate coated aluminium housing
- Built-in constant current LED driver included
- Dimmable version complete with dimmable driver

OPTIONS

- Beam angle: Choice of 24° or 38°
- **Dimming:** Fixed output as standard, but mains dimmable versions are available for use with suitable phase-cutting dimmers. If required, add suffix MD when ordering

Model	Colour temp.	Lumens	Input	Dimmable	CRI	PF	Beam angle
LED MR16I 3W	2700K/3000K/4000K/6500K	220lm	AC/DC12V	NO	>80	>0.75	24°/38°
LED MR16I 4W	2700K/3000K/4000K/6500K	360lm	AC/DC12V	NO	>80	>0.75	24°/38°
LED MR16I 5W	2700K/3000K/4000K/6500K	440lm	AC/DC12V	NO	>80	>0.75	24°/38°
LED MR16I 4W	2700K/3000K/4000K/6500K	360lm	110-240V	NO	>80	>0.75	24°/38°
LED MR16I 6W	2700K/3000K/4000K/6500K	500lm	110-240V	NO	>80	>0.75	24°/38°
LED GU10I 3W	2700K/3000K/4000K/6500K	300lm	110-240V	NO	>80	>0.75	24°/38°
LED GU10I 4W	2700K/3000K/4000K/6500K	360lm	110-240V	NO	>80	>0.75	24°/38°
LED GU10I 6W	2700K/3000K/4000K/6500K	580lm	110-240V	NO	>80	>0.75	24°/38°
LED GU10I DIM 6W	2700K/3000K/4000K/6500K	550lm	220-240V	YES	>80	>0.75	24°/38°

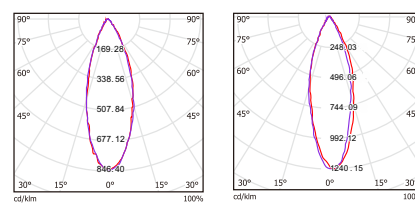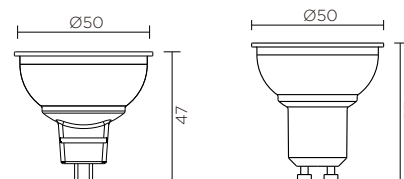

LED MR16I 4W 38°

LED GU10I 6W 38°