



LED Performer1 T5 Batten


### Features

- Plastic unibody design with integrated connector
- Broad range of lengths and color temperatures
- Energy efficient

### Benefits

- Continuous light with no dark spots
- Accessory free Installation, easy to connect

### Application



### Specification


| Item Description                   | Power (W) | Power Factor | Lumen (lm) | Efficacy (lm/W) | CRI | CCT  | Life Time (hrs) |
|------------------------------------|-----------|--------------|------------|-----------------|-----|------|-----------------|
| LED-P1-T5 batten-310mm-3.5W-3000K  | 3.5       | 0.9          | 300        | 86              | 70  | 3000 | 40000           |
| LED-P1-T5 batten-310mm-3.5W-4000K  | 3.5       | 0.9          | 300        | 86              | 70  | 4000 | 40000           |
| LED-P1-T5 batten-310mm-3.5W-5700K  | 3.5       | 0.9          | 300        | 86              | 70  | 5700 | 40000           |
| LED-P1-T5 batten-570mm-7W-3000K    | 7         | 0.9          | 600        | 86              | 70  | 3000 | 40000           |
| LED-P1-T5 batten-570mm-7W-4000K    | 7         | 0.9          | 600        | 86              | 70  | 4000 | 40000           |
| LED-P1-T5 batten-570mm-7W-5700K    | 7         | 0.9          | 600        | 86              | 70  | 5700 | 40000           |
| LED-P1-T5 batten-870mm-10.5W-3000K | 10.5      | 0.9          | 900        | 86              | 70  | 3000 | 40000           |
| LED-P1-T5 batten-870mm-10.5W-4000K | 10.5      | 0.9          | 900        | 86              | 70  | 4000 | 40000           |
| LED-P1-T5 batten-870mm-10.5W-5700K | 10.5      | 0.9          | 900        | 86              | 70  | 5700 | 40000           |
| LED-P1-T5 batten-1170mm-14W-3000K  | 14        | 0.9          | 1200       | 86              | 70  | 3000 | 40000           |
| LED-P1-T5 batten-1170mm-14W-4000K  | 14        | 0.9          | 1200       | 86              | 70  | 4000 | 40000           |
| LED-P1-T5 batten-1170mm-14W-5700K  | 14        | 0.9          | 1200       | 86              | 70  | 5700 | 40000           |

| Application Conditions  |          |
|-------------------------|----------|
| IP                      | IP20     |
| Operating Temperature   | -20-40°C |
| Application Temperature | 25°C     |
| Storage Environment     | -25-50°C |


| Electrical Supply |         |
|-------------------|---------|
| Frequency (Hz)    | 50/ 60  |
| Voltage (V)       | 100-240 |
| AC/DC             | AC      |

| Mechanical Properties |             |
|-----------------------|-------------|
| Optical Material      | PC          |
| Housing Material      | PC+Aluminum |
| Finishing Colour      | White       |

CB  
IEC Safety



### Dimensional Drawing

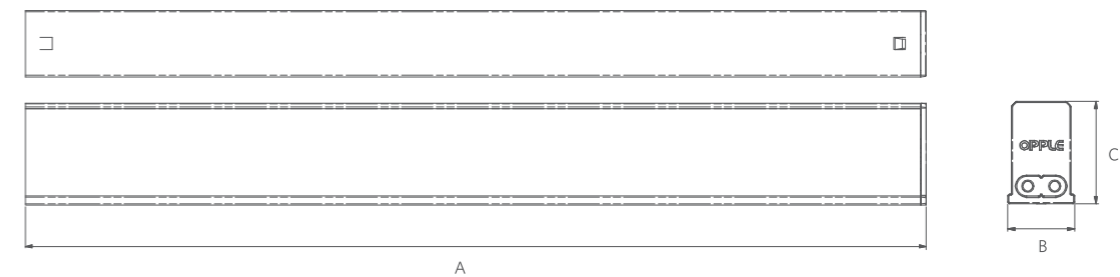

|        | 4W   | 7W   | 11W  | 14W  |
|--------|------|------|------|------|
| A (mm) | 300  | 600  | 900  | 1200 |
| B (mm) | 22.2 | 22.2 | 22.2 | 22.2 |
| C (mm) | 38   | 38   | 38   | 38   |