


LED UNDERGROUND LIGHT

地埋灯 LUL-R60A 系列

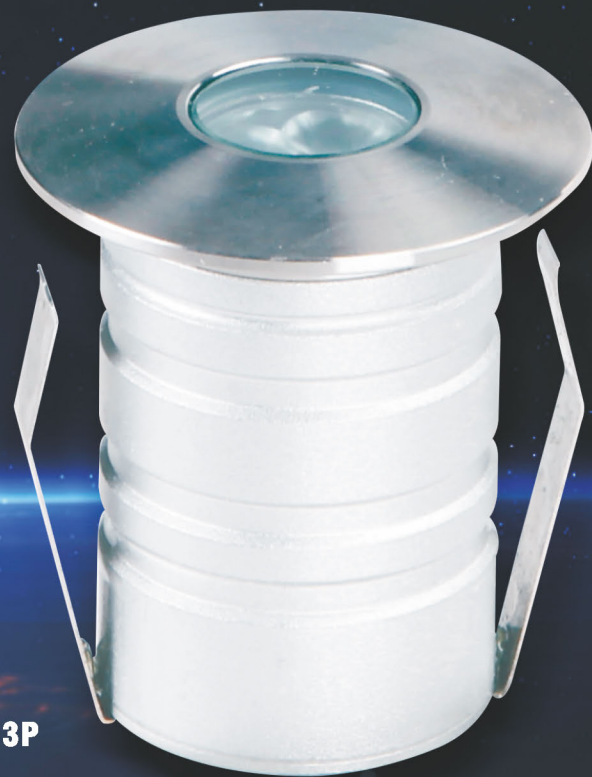


LUL-R60A-1P/3P

Features 产品特点

- * 光源采用低热阻，高效率的品牌灯珠，极低的光衰率，达到3万小时的使用寿命。
- * 灯体采用不锈钢面盖+6063铝合金，散热性能更优越。
- * 透镜角度选择多样化。
- * 采用IP67防水设计，结构+灌封双重防水
- * Low thermal resistance, high efficiency LEDs used, low light decay rate extends LEDs life span to 30,000 hrs.
- * Stainless steel cover + 6063 aluminum housing used for perfect-performance heat dissipation;
- * Optional on optic LENSs;
- * IP67 waterproof design with sealed glue plus structure;

物理 & 安装尺寸 Physical & Installation Dimensions

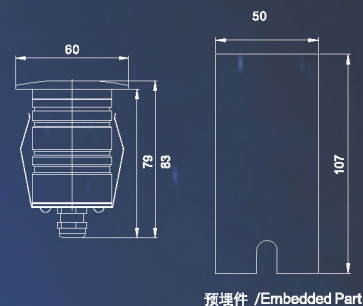

LUL-R60A-1P/3P

单位/Unit : mm

CE IP67 EPISTAR CREE

[ENJOY THE LIGHT]
[ENJOY THE LIFE]


标配型号 & 技术参数 Model Info & Specifications

型号/Model	LUL-R60A-1P	LUL-R60A-3P
尺寸 /Size	D60xH83mm	D60xH83mm
材质 /Main body	316不锈钢+铝/316 Stainless Steel+Aluminium	316不锈钢+铝/316 Stainless Steel+Aluminium
重量 /Weight	0.33kg±5%	0.33kg±5%
灯珠数 /LED Quantity	1x3W	3x1W
灯珠颜色 /Color	单色 /Steady color	RGB全彩 /RGB
输入电压 /Input Volt	12V/24V DC	12V/24V DC
最大功率 /Power(Max.)	3W	3W
透镜角度 /LENS	15°/20°/45°	15°/25°/40°(3in1)
控制方式 /Control Mode	单色 /Steady	CTR-RGB-12V/24V


应用场所 Project application



照度图 Illuminance At A Distance

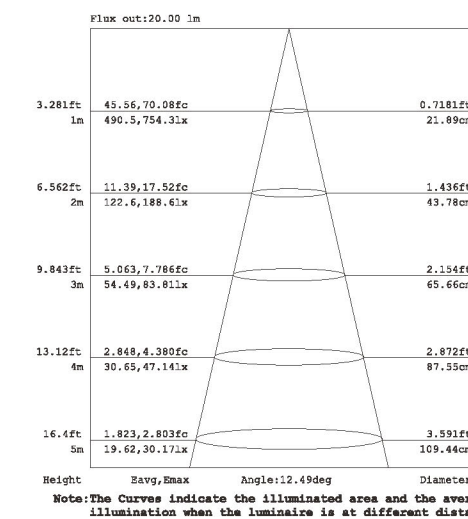

光强分布曲线 Distribution Curve

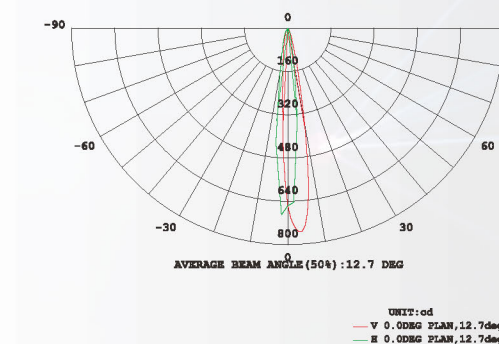

LUL-R60A-3P Beam Angle: 15°