

LED UNDERGROUND LIGHT


地埋灯 LUL-BF1/2/3 系列



LUL-BF3



LUL-BF1

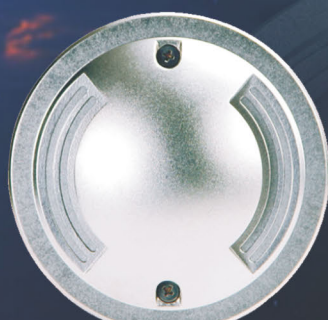

LUL-BF2

Features 产品特点

- * 采用5630SMD 0.5瓦光源，具有发光效率高，高显值，光衰小等特点；
- * 316不锈钢面盖，高强度，具有IK等级为：10，压铸铝灯体，散热良好；
- * IP67防护等级，发光有方向性，减少光污染；
- * 启动速度1-3秒，无频闪，抗干扰不含汞等有害物质，节能环保；

- * Adopting 5630SMD/0.5W LEDs with strong points of high luminousefficiency,high CRI and low light decay etc.
- * 316 stainless steel cover with high strength,IK10; die-casting aluminum housing with better heat radiation;
- * IP67 protecting rating,directional light emission reduces light pollution;
- * 1-3 seconds to power on without any shaking,it is anti-interference ,non-containing harmful substances such as mercury,energy-saving and environmental protection.

物理 & 安装尺寸 Physical & Installation Dimensions



单位/Unit : mm

预埋件 /Embedded Part

CE IP67 OSRAM CREE


标配型号 & 技术参数 Model Info & Specifications

型号/Model	LUL-BF1	LUL-BF2	LUL-BF3
尺寸 /Size	D116xH91mm	D116xH91mm	D116xH91mm
材质 /Main body	316不锈钢+铝 /316 Stainless Steel+Aluminum		
重量 /Weight	1.2kg±5%	1.2kg±5%	1.2kg±5%
灯珠数 /LED Quantity	6pcs SMD 5630/0.5W	6pcs SMD 5630/0.5W	6pcs SMD 5630/0.5W
灯珠颜色 /Color	单色 /Steady color	单色 /Steady color	单色 /Steady color
输入电压 /Input Volt	24V DC	24V DC	24V DC
最大功率 /Power(Max.)	3W	3W	3W
透镜角度 /LENs	120°	120°	120°
控制方式 /Control Mode	Steady	Steady	Steady
打光方向 /Lighting side	单向 /Single side	双向 /Two sides	四向 /Four sides

应用场所 Project application



照度图 Illuminance At A Distance

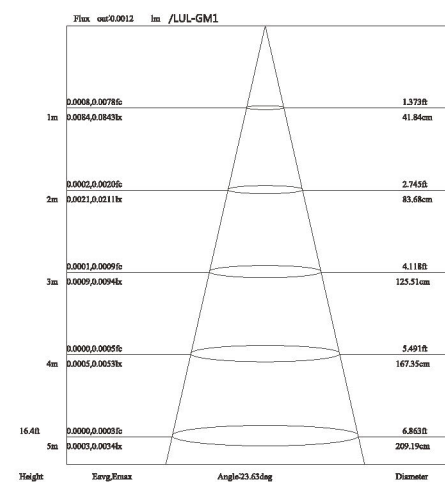

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

光强分布曲线 Distribution Curve

