

# LED WALL LIGHT

## 嵌墙灯 LWL-BF1/2系列

### Features 产品特点

- \* 采用CREE朗伯型封装单颗3瓦光源,具有发光效率高,显色指数高,光衰小,聚光等特点
- \* 高导热性铝合金灯体,压铸铝面盖,散热良好,强度高,IP65防护等级,发光有方向性,减少光污染
- \* 启动速度1-3秒,无频闪,抗干扰,不含汞等有害物质,节能环保的绿色灯具

- \* Adopting CREE LEDs with strong points of high luminous efficiency, high CRI and low light decay ect.
- \* High thermal conductive die-casting aluminum housing and cover with better heat radiation, high strength and IP65 protection class. Light Directional light emission reduce light pollution
- \* 1-3 seconds to power on without any shaking, it is anti-interference, non-containing harmful substances such as mercury, energy-saving and environmental protection




LWL-BF1




LWL-BF2


### 物理 & 安装尺寸 Physical & Installation Dimensions

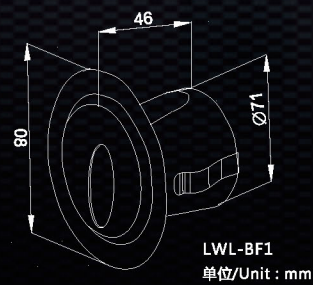

LWL-BF1  
单位/Unit: mm

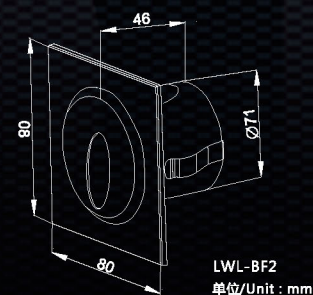

LWL-BF2  
单位/Unit: mm

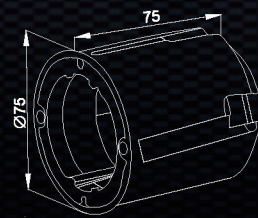

LWL-BF1/BF2  
单位/Unit: mm  
预埋件 / Embedded Part

CE IP65 EPISTAR CREE


### 标配型号 & 技术参数 Model Info & Specifications

型号/Model	LWL-BF1	LWL-BF2
尺寸 /Size	D80xH46mm	L80xW80xH46mm
材质 /Main body	压铸铝合金/Die casting aluminum alloy	压铸铝合金/Die casting aluminum alloy
重量 /Weight	0.26kgs±5%	0.26kgs±5%
灯珠数 /LED Quantity	1x3W	1x3W
灯珠颜色 /Color	暖白,中性白,白光/WW,NW,W	暖白,中性白,白光/WW,NW,W
输入电压 /Input Volt	24V DC/100V-240V AC	24V DC/100V-240V AC
最大功率 /Power(Max.)	2.6W/3.3W	2.6/3.3W
发光角度 /Light Angle	80°	80°

### 应用场所 Project application




### 照度图 Illuminance At A Distance

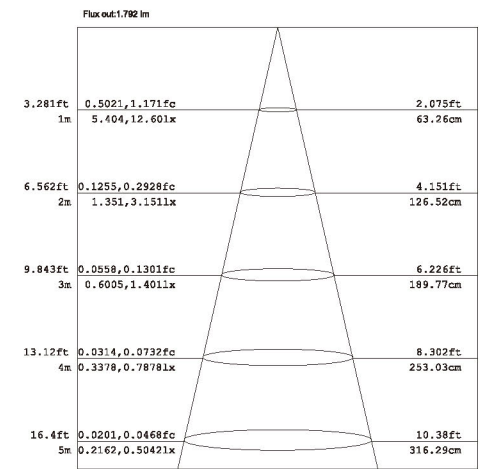

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance

### 光强分布曲线 Distribution Curve

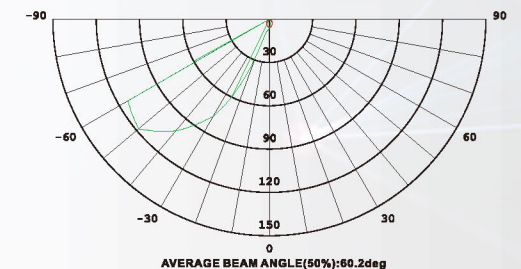

Unit: cd  
 -y 0.0 DEG PLAN, 85.2deg  
 -x 0.0 DEG PLAN, 35.1deg

LWL-BF1 Beam Angle: 80°